



# MyID PIV

Version 12.13

## Lifecycle API

Lutterworth Hall, St Mary's Road, Lutterworth, Leicestershire, LE17 4PS, UK  
[www.intercede.com](http://www.intercede.com) | [info@intercede.com](mailto:info@intercede.com) | [@intercedemyid](https://twitter.com/intercedemyid) | +44 (0)1455 558111

## Copyright

© 2001-2024 Intercede Limited. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished exclusively under a restricted license or non-disclosure agreement. Copies of software supplied by Intercede Limited may not be used resold or disclosed to third parties or used for any commercial purpose without written authorization from Intercede Limited and will perpetually remain the property of Intercede Limited. They may not be transferred to any computer without both a service contract for the use of the software on that computer being in existence and written authorization from Intercede Limited.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of Intercede Limited.

Whilst Intercede Limited has made every effort in the preparation of this manual to ensure the accuracy of the information, the information contained in this manual is delivered without warranty, either express or implied. Intercede Limited will not be held liable for any damages caused, or alleged to be caused, either directly or indirectly by this manual.

### Licenses and Trademarks

The Intercede® and MyID® word marks and the MyID® logo are registered trademarks of Intercede in the UK, US and other countries.

Microsoft and Windows are registered trademarks of Microsoft Corporation. Other brands and their products are trademarks or registered trademarks of their respective holders and should be noted as such. All other trademarks acknowledged.

### Apache log4net

Apache License Version 2.0, January 2004 <http://www.apache.org/licenses/>

#### TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

##### 1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

© You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License. ---

## Conventions used in this document

- Lists:
  - Numbered lists are used to show the steps involved in completing a task when the order is important.
  - Bulleted lists are used when the order is unimportant or to show alternatives.
- **Bold** is used for menu items and for labels.

For example:

  - Record a valid email address in '**From**' email address.
  - Select **Save** from the **File** menu.
- *Italic* is used for emphasis:

For example:

  - Copy the file *before* starting the installation.
  - Do *not* remove the files before you have backed them up.
- ***Bold and italic*** hyperlinks are used to identify the titles of other documents.

For example: "See the ***Release Notes*** for further information."

Unless otherwise explicitly stated, all referenced documentation is available on the product installation media.
- A `fixed width` font is used where the identification of spaces is important, including filenames, example SQL queries and any entries made directly into configuration files or the database.
- **Notes** are used to provide further information, including any prerequisites or configuration additional to the standard specifications.

For example:

**Note:** This issue only occurs if updating from a previous version.
- Warnings are used to indicate where failure to follow a particular instruction may result in either loss of data or the need to manually configure elements of the system.

For example:

**Warning:** You must take a backup of your database before making any changes to it.

## Contents

|                                                    |           |
|----------------------------------------------------|-----------|
| <b>Lifecycle API</b>                               | <b>1</b>  |
| <b>Copyright</b>                                   | <b>2</b>  |
| <b>Conventions used in this document</b>           | <b>6</b>  |
| <b>Contents</b>                                    | <b>7</b>  |
| <b>1 Introduction</b>                              | <b>15</b> |
| 1.1 The Lifecycle API in the card issuance process | 16        |
| <b>2 Lifecycle API web service</b>                 | <b>17</b> |
| 2.1 Installing the service                         | 18        |
| 2.2 Security settings                              | 19        |
| 2.3 Overview                                       | 19        |
| 2.4 Increasing the maximum pool size               | 20        |
| 2.5 Timeouts                                       | 20        |
| 2.6 Supported options                              | 21        |
| 2.7 Known issues                                   | 21        |
| 2.8 Limitations                                    | 21        |
| 2.8.1 Restricting inactive users                   | 21        |
| <b>3 Preparing the data for import</b>             | <b>23</b> |
| 3.1 CMS and PIV differences                        | 23        |
| 3.2 Escaping characters                            | 24        |
| 3.2.1 DNs                                          | 24        |
| 3.3 Encoding images                                | 24        |
| 3.4 Advanced settings defaults file                | 25        |
| 3.5 Adding and modifying users                     | 25        |
| 3.6 Requesting cards                               | 25        |
| 3.7 Enabling, disabling and removing users         | 26        |
| 3.7.1 Removing users                               | 26        |
| 3.7.2 Disabling users                              | 26        |
| 3.7.3 Enabling users                               | 26        |
| 3.7.4 Updating users who were imported from LDAP   | 26        |
| 3.7.5 Status mapping codes                         | 27        |
| 3.8 Importing additional fields                    | 34        |
| 3.8.1 Additional user fields                       | 34        |
| 3.8.2 Additional group fields                      | 34        |
| 3.8.3 Additional job fields                        | 34        |
| 3.9 Importing users into Entrust                   | 35        |
| 3.10 Canceling credentials and jobs                | 35        |
| 3.10.1 Canceling cards                             | 36        |
| 3.10.2 Canceling jobs                              | 37        |
| 3.10.3 Filtering job cancellations                 | 37        |
| 3.11 Importing operator credentials                | 37        |
| <b>4 Calling the import service</b>                | <b>39</b> |
| 4.1 Results                                        | 39        |
| <b>5 Advanced settings</b>                         | <b>40</b> |

|                                                                             |           |
|-----------------------------------------------------------------------------|-----------|
| 5.1 Custom schema and transform files .....                                 | 43        |
| 5.1.1 Examples .....                                                        | 45        |
| 5.1.2 Troubleshooting .....                                                 | 45        |
| <b>6 Troubleshooting .....</b>                                              | <b>46</b> |
| 6.1 Logging .....                                                           | 46        |
| 6.2 ASP.NET temporary folder permissions .....                              | 46        |
| 6.3 HTTP Error 500.24 – Internal Server Error .....                         | 46        |
| <b>7 Data structure .....</b>                                               | <b>47</b> |
| 7.1 CMSCardRequest structure .....                                          | 48        |
| 7.1.1 CMSCardRequest/Parameters .....                                       | 48        |
| 7.1.2 CMSCardRequest/Group .....                                            | 48        |
| 7.1.3 CMSCardRequest/Group/Name .....                                       | 48        |
| 7.1.4 CMSCardRequest/Group/Description .....                                | 48        |
| 7.1.5 CMSCardRequest/Group/OrgUnit .....                                    | 48        |
| 7.1.6 CMSCardRequest/Group/Parent .....                                     | 48        |
| 7.1.7 CMSCardRequest/Group/AdditionalFields .....                           | 48        |
| 7.1.8 CMSCardRequest/Group/User .....                                       | 48        |
| 7.1.9 CMSCardRequest/Group/User/Personal .....                              | 49        |
| 7.1.10 CMSCardRequest/Group/User/Personal/FirstName .....                   | 49        |
| 7.1.11 CMSCardRequest/Group/User/Personal/LastName .....                    | 49        |
| 7.1.12 CMSCardRequest/Group/User/Personal/Initial .....                     | 49        |
| 7.1.13 CMSCardRequest/Group/User/Personal/Title .....                       | 49        |
| 7.1.14 CMSCardRequest/Group/User/Personal/Email .....                       | 49        |
| 7.1.15 CMSCardRequest/Group/User/Personal/PhoneExt .....                    | 49        |
| 7.1.16 CMSCardRequest/Group/User/Personal/MobileNumber .....                | 49        |
| 7.1.17 CMSCardRequest/Group/User/Personal/PhoneNumber .....                 | 49        |
| 7.1.18 CMSCardRequest/Group/User/Personal/EmployeeID .....                  | 49        |
| 7.1.19 CMSCardRequest/Group/User/Personal/OptionalLine1 .....               | 50        |
| 7.1.20 CMSCardRequest/Group/User/Personal/OptionalLine2 .....               | 50        |
| 7.1.21 CMSCardRequest/Group/User/Personal/OptionalLine3 .....               | 50        |
| 7.1.22 CMSCardRequest/Group/User/Personal/OptionalLine4 .....               | 50        |
| 7.1.23 CMSCardRequest/Group/User/Authentication .....                       | 50        |
| 7.1.24 CMSCardRequest/Group/User/Authentication/SecurityPhrase .....        | 50        |
| 7.1.25 CMSCardRequest/Group/User/Authentication/SecurityPhrase/Prompt ..... | 50        |
| 7.1.26 CMSCardRequest/Group/User/Authentication/SecurityPhrase/Answer ..... | 51        |
| 7.1.27 CMSCardRequest/Group/User/Card .....                                 | 52        |
| 7.1.28 CMSCardRequest/Group/User/Card/CardProfile .....                     | 52        |
| 7.1.29 CMSCardRequest/Group/User/Card/CardExpiryDate .....                  | 52        |
| 7.1.30 CMSCardRequest/Group/User/Card/Renewal .....                         | 53        |
| 7.1.31 CMSCardRequest/Group/User/Card/ImportCard .....                      | 53        |
| 7.1.32 CMSCardRequest/Group/User/Card/CardRequestedBy .....                 | 53        |
| 7.1.33 CMSCardRequest/Group/User/Card/CancelExisting .....                  | 53        |
| 7.1.34 CMSCardRequest/Group/User/Card/JobLabel .....                        | 53        |
| 7.1.35 CMSCardRequest/Group/User/Card/Update .....                          | 53        |
| 7.1.36 CMSCardRequest/Group/User/Card/Update/OriginalSerialNumber .....     | 53        |

|                                                                              |    |
|------------------------------------------------------------------------------|----|
| 7.1.37 CMSCardRequest/Group/User/Card/Update/OriginalDeviceType .....        | 54 |
| 7.1.38 CMSCardRequest/Group/User/Card/Update/StatusMapping .....             | 54 |
| 7.1.39 CMSCardRequest/Group/User/Card/Update/ParametersXML .....             | 54 |
| 7.1.40 CMSCardRequest/Group/User/Card/Update/ParametersXML/UnlockPIN .....   | 54 |
| 7.1.41 CMSCardRequest/Group/User/Card/Update/ParametersXML/Relssue .....     | 54 |
| 7.1.42 CMSCardRequest/Group/User/Card/Replacement .....                      | 54 |
| 7.1.43 CMSCardRequest/Group/User/Card/Replacement/OriginalSerialNumber ..... | 54 |
| 7.1.44 CMSCardRequest/Group/User/Card/Replacement/OriginalDeviceType .....   | 54 |
| 7.1.45 CMSCardRequest/Group/User/Card/Replacement/StatusMapping .....        | 54 |
| 7.1.46 CMSCardRequest/Group/User/Card/GenerateOTP .....                      | 55 |
| 7.1.47 CMSCardRequest/Group/User/Card/GenerateOTP/Notification .....         | 55 |
| 7.1.48 CMSCardRequest/Group/User/Card/GenerateOTP/Notification/Name .....    | 55 |
| 7.1.49 CMSCardRequest/Group/User/Card/GenerateOTP/Notification/Action .....  | 55 |
| 7.1.50 CMSCardRequest/Group/User/Card/OriginalSerialNumber .....             | 55 |
| 7.1.51 CMSCardRequest/Group/User/Card/OriginalDeviceType .....               | 55 |
| 7.1.52 CMSCardRequest/Group/User/Card/SerialNumber .....                     | 56 |
| 7.1.53 CMSCardRequest/Group/User/Card/DeviceType .....                       | 56 |
| 7.1.54 CMSCardRequest/Group/User/Card/StatusMapping .....                    | 56 |
| 7.1.55 CMSCardRequest/Group/User/Card/RevocationComment .....                | 56 |
| 7.1.56 CMSCardRequest/Group/User/Card/Reprovision .....                      | 56 |
| 7.1.57 CMSCardRequest/Group/User/Card/CardLayout .....                       | 57 |
| 7.1.58 CMSCardRequest/Group/User/Card/Container .....                        | 57 |
| 7.1.59 CMSCardRequest/Group/User/Card/Certificate .....                      | 57 |
| 7.1.60 CMSCardRequest/Group/User/Card/AdditionalFields .....                 | 57 |
| 7.1.61 CMSCardRequest/Group/User/CardUpdate .....                            | 57 |
| 7.1.62 CMSCardRequest/Group/User/CardUpdate/SerialNumber .....               | 57 |
| 7.1.63 CMSCardRequest/Group/User/CardUpdate/DeviceType .....                 | 57 |
| 7.1.64 CMSCardRequest/Group/User/CardUpdate/CardRequestedBy .....            | 57 |
| 7.1.65 CMSCardRequest/Group/User/CardUpdate/ParametersXML .....              | 57 |
| 7.1.66 CMSCardRequest/Group/User/CardUpdate/ParametersXML/UnlockPIN .....    | 57 |
| 7.1.67 CMSCardRequest/Group/User/CardUpdate/PIN .....                        | 57 |
| 7.1.68 CMSCardRequest/Group/User/Account .....                               | 57 |
| 7.1.69 CMSCardRequest/Group/User/Account/DN .....                            | 58 |
| 7.1.70 CMSCardRequest/Group/User/Account/CN .....                            | 58 |
| 7.1.71 CMSCardRequest/Group/User/Account/OU .....                            | 58 |
| 7.1.72 CMSCardRequest/Group/User/Account/UPN .....                           | 58 |
| 7.1.73 CMSCardRequest/Group/User/Account/SAMAccountName .....                | 58 |
| 7.1.74 CMSCardRequest/Group/User/Account/LogonName .....                     | 58 |
| 7.1.75 CMSCardRequest/Group/User/Account/NewLogonName .....                  | 58 |
| 7.1.76 CMSCardRequest/Group/User/Account/UniqueID .....                      | 58 |
| 7.1.77 CMSCardRequest/Group/User/Account/Roles .....                         | 58 |
| 7.1.78 CMSCardRequest/Group/User/Account/Roles/Role .....                    | 58 |
| 7.1.79 CMSCardRequest/Group/User/Account/Roles/Role/Name .....               | 58 |
| 7.1.80 CMSCardRequest/Group/User/Account/Roles/Role/Scope .....              | 59 |
| 7.1.81 CMSCardRequest/Group/User/Account/Roles/Role/LogonMechanism .....     | 59 |

|                                                                                            |    |
|--------------------------------------------------------------------------------------------|----|
| 7.1.82 CMSCardRequest/Group/User/Account/EntrustProfile .....                              | 59 |
| 7.1.83 CMSCardRequest/Group/User/Account/MaxRequestExpiryDate .....                        | 59 |
| 7.1.84 CMSCardRequest/Group/User/Account/UserDataApproved .....                            | 60 |
| 7.1.85 CMSCardRequest/Group/User/Account/VettingDate .....                                 | 60 |
| 7.1.86 CMSCardRequest/Group/User/Account/UserSID .....                                     | 60 |
| 7.1.87 CMSCardRequest/Group/User/Photo .....                                               | 60 |
| 7.1.88 CMSCardRequest/Group/User/Photo/Encoding .....                                      | 60 |
| 7.1.89 CMSCardRequest/Group/User/Photo/Data .....                                          | 60 |
| 7.1.90 CMSCardRequest/Group/User/Photo/DateTaken .....                                     | 61 |
| 7.1.91 CMSCardRequest/Group/User/Photo/Source .....                                        | 61 |
| 7.1.92 CMSCardRequest/Group/User/Photo/None .....                                          | 61 |
| 7.1.93 CMSCardRequest/Group/User/AdminGroups .....                                         | 61 |
| 7.1.94 CMSCardRequest/Group/User/AdminGroups/AdminGroup .....                              | 62 |
| 7.1.95 CMSCardRequest/Group/User/AdminGroups/AdminGroup/Name .....                         | 62 |
| 7.1.96 CMSCardRequest/Group/User/AdditionalFields .....                                    | 62 |
| 7.1.97 CMSCardRequest/Group/User/Actions .....                                             | 62 |
| 7.1.98 CMSCardRequest/Group/User/Actions/ApplicantAction .....                             | 62 |
| 7.1.99 CMSCardRequest/Group/User/Actions/CertSerialNumber .....                            | 62 |
| 7.1.100 CMSCardRequest/Group/User/Actions/CertPolicyName .....                             | 63 |
| 7.1.101 CMSCardRequest/Group/User/Actions/StatusMappingID .....                            | 63 |
| 7.1.102 CMSCardRequest/Group/User/Actions/RevocationComment .....                          | 63 |
| 7.1.103 CMSCardRequest/Group/User/Actions/RevocationDelay .....                            | 63 |
| 7.1.104 CMSCardRequest/Group/User/Actions/Device .....                                     | 63 |
| 7.1.105 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier .....                    | 63 |
| 7.1.106 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier/ SerialNumber .....      | 63 |
| 7.1.107 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier/ SerialNumberField ..... | 63 |
| 7.1.108 CMSCardRequest/Group/User/Actions/Device/ProcessStatus .....                       | 63 |
| 7.1.109 CMSCardRequest/Group/User/Actions/RequestedBy .....                                | 64 |
| 7.1.110 CMSCardRequest/Group/User/Actions/Job .....                                        | 64 |
| 7.1.111 CMSCardRequest/Group/User/Actions/Filters .....                                    | 64 |
| 7.2 CMSUserUpdate structure .....                                                          | 65 |
| 7.3 CMSImportResponse structure .....                                                      | 66 |
| 7.3.1 CMSImportResponse/Group .....                                                        | 66 |
| 7.3.2 CMSImportResponse/Group/Name .....                                                   | 66 |
| 7.3.3 CMSImportResponse/Group/Result .....                                                 | 66 |
| 7.3.4 CMSImportResponse/Group/User .....                                                   | 66 |
| 7.3.5 CMSImportResponse/Group/User/FirstName .....                                         | 66 |
| 7.3.6 CMSImportResponse/Group/User/LastName .....                                          | 66 |
| 7.3.7 CMSImportResponse/Group/User/EmployeeID .....                                        | 66 |
| 7.3.8 CMSImportResponse/Group/User/LogonName .....                                         | 66 |
| 7.3.9 CMSImportResponse/Group/User/CardRequest .....                                       | 66 |
| 7.3.10 CMSImportResponse/Group/User/CardUpdate .....                                       | 66 |
| 7.3.11 CMSImportResponse/Group/User/UnlockCardRequest .....                                | 67 |
| 7.3.12 CMSImportResponse/Group/User/Result .....                                           | 67 |
| 7.3.13 CMSImportResponse/Group/User/Reason .....                                           | 67 |

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| 7.3.14 CMSImportResponse/Group/User/error .....                                   | 67 |
| 7.4 PivCardRequest structure .....                                                | 68 |
| 7.4.1 PivCardRequest/Parameters .....                                             | 68 |
| 7.4.2 PivCardRequest/Agency .....                                                 | 68 |
| 7.4.3 PivCardRequest/Agency/DeptCode .....                                        | 68 |
| 7.4.4 PivCardRequest/Agency/AgencyCode .....                                      | 69 |
| 7.4.5 PivCardRequest/Agency/FacilityCode .....                                    | 69 |
| 7.4.6 PivCardRequest/Agency/AgencyName .....                                      | 69 |
| 7.4.7 PivCardRequest/Agency/FacilityName .....                                    | 69 |
| 7.4.8 PivCardRequest/Agency/DUNS .....                                            | 69 |
| 7.4.9 PivCardRequest/Agency/OC .....                                              | 69 |
| 7.4.10 PivCardRequest/Agency/OI .....                                             | 69 |
| 7.4.11 PivCardRequest/Agency/Department .....                                     | 70 |
| 7.4.12 PivCardRequest/Agency/BaseDN .....                                         | 70 |
| 7.4.13 PivCardRequest/Agency/Parent .....                                         | 70 |
| 7.4.14 PivCardRequest/Agency/AgencyAddress .....                                  | 70 |
| 7.4.15 PivCardRequest/Agency/AdditionalAgencyFields .....                         | 70 |
| 7.4.16 PivCardRequest/Agency/Applicant .....                                      | 70 |
| 7.4.17 PivCardRequest/Agency/Applicant/Personal .....                             | 70 |
| 7.4.18 PivCardRequest/Agency/Applicant/Personal/FirstName .....                   | 71 |
| 7.4.19 PivCardRequest/Agency/Applicant/Personal/LastName .....                    | 71 |
| 7.4.20 PivCardRequest/Agency/Applicant/Personal/NickName .....                    | 71 |
| 7.4.21 PivCardRequest/Agency/Applicant/Personal/MiddleName .....                  | 71 |
| 7.4.22 PivCardRequest/Agency/Applicant/Personal/Suffix .....                      | 71 |
| 7.4.23 PivCardRequest/Agency/Applicant/Personal/Title .....                       | 71 |
| 7.4.24 PivCardRequest/Agency/Applicant/Personal/Email .....                       | 71 |
| 7.4.25 PivCardRequest/Agency/Applicant/Personal/Fax .....                         | 71 |
| 7.4.26 PivCardRequest/Agency/Applicant/Personal/Cell .....                        | 71 |
| 7.4.27 PivCardRequest/Agency/Applicant/Personal/Phone .....                       | 71 |
| 7.4.28 PivCardRequest/Agency/Applicant/Personal/EmployeeID .....                  | 71 |
| 7.4.29 PivCardRequest/Agency/Applicant/Personal/Address .....                     | 71 |
| 7.4.30 PivCardRequest/Agency/Applicant/Personal/BirthDate .....                   | 72 |
| 7.4.31 PivCardRequest/Agency/Applicant/Personal/Nationality .....                 | 72 |
| 7.4.32 PivCardRequest/Agency/Applicant/Personal/Citizenship .....                 | 78 |
| 7.4.33 PivCardRequest/Agency/Applicant/Personal/CountryOfBirth .....              | 78 |
| 7.4.34 PivCardRequest/Agency/Applicant/Personal/PlaceOfBirth .....                | 79 |
| 7.4.35 PivCardRequest/Agency/Applicant/Personal/ExportRestrictions .....          | 79 |
| 7.4.36 PivCardRequest/Agency/Applicant/Authentication .....                       | 79 |
| 7.4.37 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase .....        | 79 |
| 7.4.38 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase/Prompt ..... | 79 |
| 7.4.39 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase/Answer ..... | 80 |
| 7.4.40 PivCardRequest/Agency/Applicant/Card .....                                 | 81 |
| 7.4.41 PivCardRequest/Agency/Applicant/Card/CardProfile .....                     | 81 |
| 7.4.42 PivCardRequest/Agency/Applicant/Card/CardExpiryDate .....                  | 81 |
| 7.4.43 PivCardRequest/Agency/Applicant/Card/Renewal .....                         | 81 |

|                                                                                    |    |
|------------------------------------------------------------------------------------|----|
| 7.4.44 PivCardRequest/Group/User/Card/ImportCard .....                             | 82 |
| 7.4.45 PivCardRequest/Agency/Applicant/Card/CardRequestedBy .....                  | 82 |
| 7.4.46 PivCardRequest/Agency/Applicant/Card/JobLabel .....                         | 82 |
| 7.4.47 PivCardRequest/Agency/Applicant/Card/Update .....                           | 82 |
| 7.4.48 PivCardRequest/Agency/Applicant/Card/Update/OriginalSerialNumber .....      | 82 |
| 7.4.49 PivCardRequest/Agency/Applicant/Card/Update/OriginalDeviceType .....        | 82 |
| 7.4.50 PivCardRequest/Agency/Applicant/Card/Update/StatusMapping .....             | 82 |
| 7.4.51 PivCardRequest/Agency/Applicant/Card/Update/RevocationComment .....         | 82 |
| 7.4.52 PivCardRequest/Agency/Applicant/Card/Update/ParametersXML .....             | 82 |
| 7.4.53 PivCardRequest/Agency/Applicant/Card/Update/ParametersXML/RelIssue .....    | 82 |
| 7.4.54 PivCardRequest/Agency/Applicant/Card/Replacement .....                      | 83 |
| 7.4.55 PivCardRequest/Agency/Applicant/Card/Replacement/OriginalSerialNumber ..... | 83 |
| 7.4.56 PivCardRequest/Agency/Applicant/Card/Replacement/OriginalDeviceType .....   | 83 |
| 7.4.57 PivCardRequest/Agency/Applicant/Card/Replacement/StatusMapping .....        | 83 |
| 7.4.58 PivCardRequest/Agency/Applicant/Card/Reprovision .....                      | 83 |
| 7.4.59 PivCardRequest/Agency/Applicant/Card/CardLayout .....                       | 84 |
| 7.4.60 PivCardRequest/Agency/Applicant/Card/SerialNumber .....                     | 84 |
| 7.4.61 PivCardRequest/Agency/Applicant/Card/DeviceType .....                       | 84 |
| 7.4.62 PivCardRequest/Group/User/Card/Container .....                              | 84 |
| 7.4.63 PivCardRequest/Group/User/Card/Certificate .....                            | 84 |
| 7.4.64 PivCardRequest/Agency/Applicant/Account .....                               | 84 |
| 7.4.65 PivCardRequest/Agency/Applicant/Account/DN .....                            | 84 |
| 7.4.66 PivCardRequest/Agency/Applicant/Account/AlternateDN .....                   | 84 |
| 7.4.67 PivCardRequest/Agency/Applicant/Account/CN .....                            | 85 |
| 7.4.68 PivCardRequest/Agency/Applicant/Account/OU .....                            | 85 |
| 7.4.69 PivCardRequest/Agency/Applicant/Account/UPN .....                           | 85 |
| 7.4.70 PivCardRequest/Agency/Applicant/Account/SAMAccountName .....                | 85 |
| 7.4.71 PivCardRequest/Agency/Applicant/Account/Domain .....                        | 85 |
| 7.4.72 PivCardRequest/Agency/Applicant/Account/LogonName .....                     | 85 |
| 7.4.73 PivCardRequest/Agency/Applicant/Account/Roles .....                         | 85 |
| 7.4.74 PivCardRequest/Agency/Applicant/Account/Roles/Role .....                    | 85 |
| 7.4.75 PivCardRequest/Agency/Applicant/Account/EntrustProfile .....                | 86 |
| 7.4.76 PivCardRequest/Agency/Applicant/Account/MaxRequestExpiryDate .....          | 86 |
| 7.4.77 PivCardRequest/Agency/Applicant/Account/UserSID .....                       | 87 |
| 7.4.78 PivCardRequest/Agency/Applicant/Position .....                              | 87 |
| 7.4.79 PivCardRequest/Agency/Applicant/Position/EmployeeAssociation .....          | 87 |
| 7.4.80 PivCardRequest/Agency/Applicant/Position/EmployeeAffiliation .....          | 87 |
| 7.4.81 PivCardRequest/Agency/Applicant/Position/Rank .....                         | 87 |
| 7.4.82 PivCardRequest/Agency/Applicant/Position/EmergencyRole .....                | 87 |
| 7.4.83 PivCardRequest/Agency/Applicant/Position/Privilege .....                    | 88 |
| 7.4.84 PivCardRequest/Agency/Applicant/Position/ApplicantPosition .....            | 88 |
| 7.4.85 PivCardRequest/Agency/Applicant/Position/ExtraInfo .....                    | 88 |
| 7.4.86 PivCardRequest/Agency/Applicant/Sponsor .....                               | 88 |
| 7.4.87 PivCardRequest/Agency/Applicant/Sponsor/SponsorName .....                   | 88 |
| 7.4.88 PivCardRequest/Agency/Applicant/Sponsor/SponsorPosition .....               | 88 |

|                                                                                            |    |
|--------------------------------------------------------------------------------------------|----|
| 7.4.89 PivCardRequest/Agency/Applicant/Sponsor/SponsorAgency                               | 88 |
| 7.4.90 PivCardRequest/Agency/Applicant/Sponsor/SponsorEmail                                | 88 |
| 7.4.91 PivCardRequest/Agency/Applicant/Sponsor/SponsorPhoneNumber                          | 88 |
| 7.4.92 PivCardRequest/Agency/Applicant/Biometry                                            | 88 |
| 7.4.93 PivCardRequest/Agency/Applicant/Biometry/HeightInches                               | 88 |
| 7.4.94 PivCardRequest/Agency/Applicant/Biometry/WeightLbs                                  | 88 |
| 7.4.95 PivCardRequest/Agency/Applicant/Biometry/Gender                                     | 89 |
| 7.4.96 PivCardRequest/Agency/Applicant/Biometry/EyeColor                                   | 89 |
| 7.4.97 PivCardRequest/Agency/Applicant/Biometry/HairColor                                  | 89 |
| 7.4.98 PivCardRequest/Agency/Applicant/Biometry/Race                                       | 89 |
| 7.4.99 PivCardRequest/Agency/Applicant/Biometry/BioSample                                  | 89 |
| 7.4.100 PivCardRequest/Agency/Applicant/Biometry/Signature                                 | 92 |
| 7.4.101 PivCardRequest/Agency/Applicant/IdentityDocs                                       | 92 |
| 7.4.102 PivCardRequest/Agency/Applicant/NACI                                               | 93 |
| 7.4.103 PivCardRequest/Agency/Applicant/NACI/NACCaseNumber                                 | 93 |
| 7.4.104 PivCardRequest/Agency/Applicant/NACI/NACICaseNumber                                | 93 |
| 7.4.105 PivCardRequest/Agency/Applicant/NACI/Check                                         | 93 |
| 7.4.106 PivCardRequest/Agency/Applicant/NACI/CardIssuanceApproved                          | 94 |
| 7.4.107 PivCardRequest/Agency/Applicant/NACI/Comments                                      | 94 |
| 7.4.108 PivCardRequest/Agency/Applicant/NACI/VettingDate                                   | 94 |
| 7.4.109 PivCardRequest/Agency/Applicant/Photo                                              | 94 |
| 7.4.110 PivCardRequest/Agency/Applicant/System                                             | 94 |
| 7.4.111 PivCardRequest/Agency/Applicant/System/GUID                                        | 94 |
| 7.4.112 PivCardRequest/Agency/Applicant/System/CredNo                                      | 95 |
| 7.4.113 PivCardRequest/Agency/Applicant/System/CS                                          | 95 |
| 7.4.114 PivCardRequest/Agency/Applicant/System/POA                                         | 95 |
| 7.4.115 PivCardRequest/Agency/Applicant/System/ICI                                         | 95 |
| 7.4.116 PivCardRequest/Agency/Applicant/System/UserStatus                                  | 95 |
| 7.4.117 PivCardRequest/Agency/Applicant/System/IssuanceNotifyURL                           | 95 |
| 7.4.118 PivCardRequest/Agency/Applicant/System/CancelNotifyURL                             | 96 |
| 7.4.119 PivCardRequest/Agency/Applicant/System/CMSIssuanceNotifyURL                        | 96 |
| 7.4.120 PivCardRequest/Agency/Applicant/AdminGroups                                        | 96 |
| 7.4.121 PivCardRequest/Agency/Applicant/AdminGroups/AdminGroup                             | 96 |
| 7.4.122 PivCardRequest/Agency/Applicant/AdminGroups/AdminGroup/Name                        | 96 |
| 7.4.123 PivCardRequest/Agency/Applicant/AdditionalFields                                   | 97 |
| 7.4.124 PivCardRequest/Agency/Applicant/Actions                                            | 97 |
| 7.4.125 PivCardRequest/Agency/Applicant/Actions/ApplicantAction                            | 97 |
| 7.4.126 PivCardRequest/Agency/Applicant/Actions/CertSerialNumber                           | 97 |
| 7.4.127 PivCardRequest/Agency/Applicant/Actions/CertPolicyName                             | 97 |
| 7.4.128 PivCardRequest/Agency/Applicant/Actions/StatusMappingID                            | 97 |
| 7.4.129 PivCardRequest/Agency/Applicant/Actions/RevocationComment                          | 97 |
| 7.4.130 PivCardRequest/Agency/Applicant/Actions/Device                                     | 98 |
| 7.4.131 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier                    | 98 |
| 7.4.132 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier/ SerialNumber      | 98 |
| 7.4.133 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier/ SerialNumberField | 98 |

|                                                                            |            |
|----------------------------------------------------------------------------|------------|
| 7.4.134 PivCardRequest/Agency/Applicant/Actions/Device/ProcessStatus ..... | 98         |
| 7.4.135 PivCardRequest/Agency/Applicant/Actions/Job .....                  | 99         |
| 7.5 PivApplicantUpdate structure .....                                     | 100        |
| 7.6 PivImportResponse structure .....                                      | 101        |
| 7.6.1 PivImportResponse/Agency .....                                       | 101        |
| 7.6.2 PivImportResponse/Agency/AgencyName .....                            | 101        |
| 7.6.3 PivImportResponse/Agency/AgencyCode .....                            | 101        |
| 7.6.4 PivImportResponse/Agency/Result .....                                | 101        |
| 7.6.5 PivImportResponse/Agency/Applicant .....                             | 101        |
| 7.6.6 PivImportResponse/Agency/Applicant/FirstName .....                   | 101        |
| 7.6.7 PivImportResponse/Agency/Applicant/LastName .....                    | 101        |
| 7.6.8 PivImportResponse/Agency/Applicant/EmployeeID .....                  | 101        |
| 7.6.9 PivImportResponse/Agency/Applicant/CardRequest .....                 | 101        |
| 7.6.10 PivImportResponse/Agency/Applicant/CardUpdate .....                 | 101        |
| 7.6.11 PivImportResponse/Agency/Applicant/CardRequestFailReason .....      | 102        |
| 7.6.12 PivImportResponse/Agency/Applicant/Result .....                     | 102        |
| 7.6.13 PivImportResponse/Agency/Applicant/Reason .....                     | 102        |
| <b>8 MyIDEnroll WSDL .....</b>                                             | <b>103</b> |
| <b>9 XML schemas .....</b>                                                 | <b>106</b> |
| 9.1 Schema file locations .....                                            | 106        |
| 9.2 MyIDBaseTypes schema .....                                             | 107        |
| 9.3 CMSSchemaTypes schema .....                                            | 112        |
| 9.4 CMSCardRequest schema .....                                            | 119        |
| 9.5 CMSUserUpdate schema .....                                             | 121        |
| 9.6 CMSImportResponse schema .....                                         | 123        |
| 9.7 PIVSchemaTypes schema .....                                            | 125        |
| 9.8 PivCardRequest schema .....                                            | 139        |
| 9.9 PivApplicantUpdate schema .....                                        | 141        |
| 9.10 PivImportResponse schema .....                                        | 144        |
| <b>10 Sample files .....</b>                                               | <b>146</b> |
| 10.1 CMS sample .....                                                      | 147        |
| 10.2 PIV sample .....                                                      | 149        |


## 1 Introduction

**Important:** The MyID Lifecycle API is now deprecated, and is in the process of being replaced by the MyID Core API. See the *Lifecycle API support* section in the [Release Notes](#) for more information.

The MyID<sup>®</sup> Lifecycle API allows you to add and update users in the MyID database by sending XML documents to a web service. You can also request credentials that can then be collected from any MyID card issuing station.

You cannot use the Lifecycle API to request mobile credentials; instead, you must use the Credential Web Service. See the [Credential Web Service](#) guide for details.

## 1.1 The Lifecycle API in the card issuance process

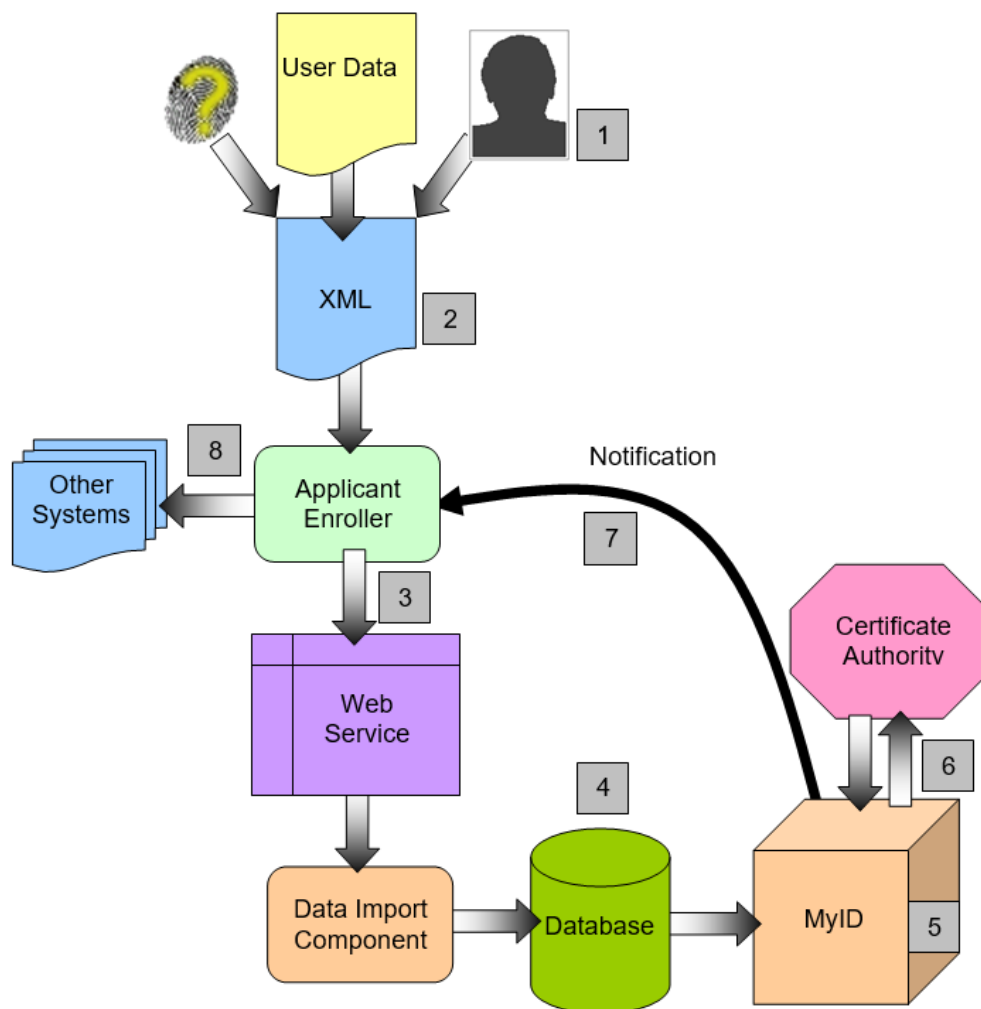

1. External to MyID, capture the user data, including the user's picture.
2. Compile the data into an XML document. Encode the image into this file.
3. Send the XML data to the MyIDEnroll web service.
4. MyID imports the user data, then passes back an XML report containing information on whether the user's record was imported correctly. MyID creates a card request for the added person.
5. If the credential profile being issued requires validation, the card request must be approved in MyID.
6. When the card is issued, MyID submits requests for certificates to the certificate authority.
7. MyID sends a notification through HTTP to the applicant enroller that the card has been issued.  
Contact Intercede professional services for information on setting up notifications.
8. The enroller can then notify other systems that the card has been issued and activated.


## 2 Lifecycle API web service

This chapter contains information on the Lifecycle API web service, including:

- Installing the web service.  
See section [2.1, \*Installing the service\*](#).
- Configuring the security settings for the web service.  
See section [2.2, \*Security settings\*](#).
- An overview of the web service architecture.  
See section [2.3, \*Overview\*](#).
- Details of configuring the maximum pool size.  
See section [2.4, \*Increasing the maximum pool size\*](#).
- Details of configuring timeouts.  
See section [2.5, \*Timeouts\*](#).
- Information on supported elements of the lifecycle schemas.  
See section [2.6, \*Supported options\*](#).
- Any known issues.  
See section [2.7, \*Known issues\*](#).

## 2.1 Installing the service

To install this API, you must select the **Lifecycle API** option when you install MyID. See the *Selecting the server roles and features* section in the [Installation and Configuration Guide](#) for details.

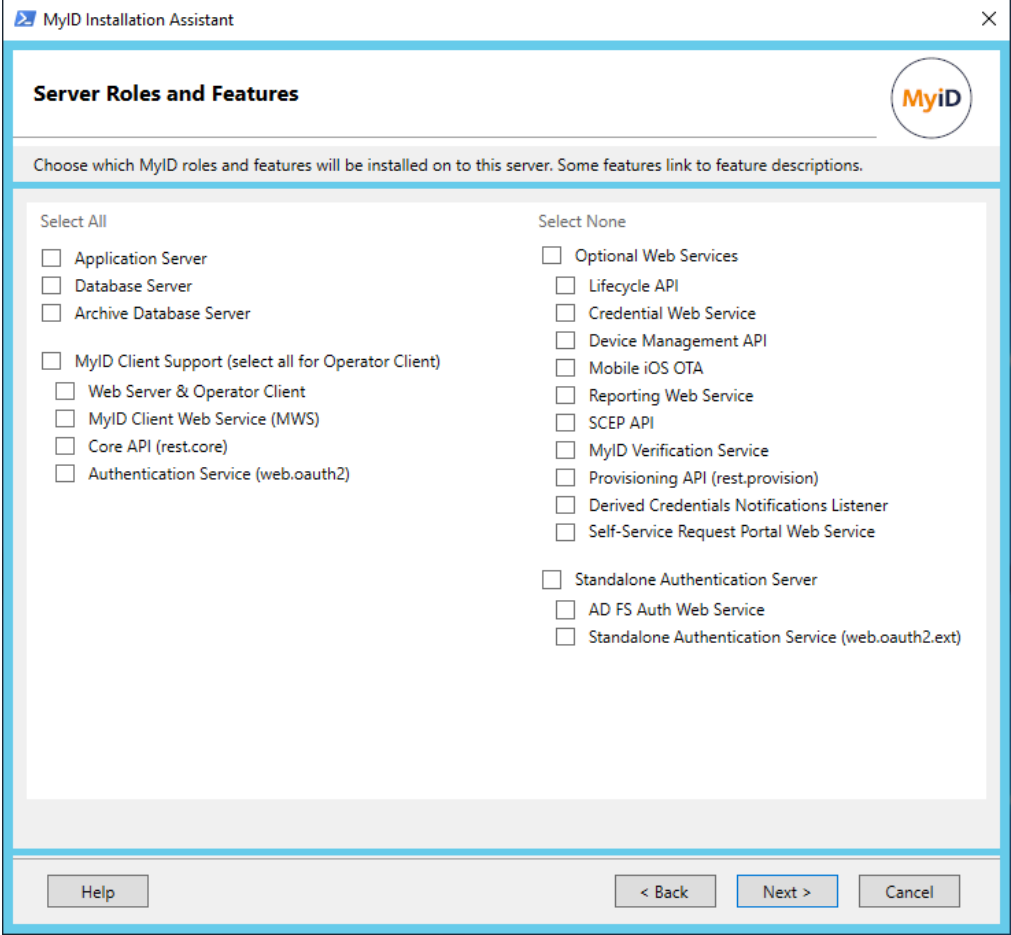

The screenshot shows the 'MyID Installation Assistant' window. The title bar says 'MyID Installation Assistant'. The main window has a header 'Server Roles and Features' with the MyID logo on the right. Below the header is a instruction: 'Choose which MyID roles and features will be installed on to this server. Some features link to feature descriptions.' The main area is divided into two columns: 'Select All' and 'Select None'. The 'Select All' column contains the following options with checkboxes: Application Server, Database Server, Archive Database Server, MyID Client Support (select all for Operator Client), Web Server & Operator Client, MyID Client Web Service (MWS), Core API (rest.core), and Authentication Service (web.oauth2). The 'Select None' column contains the following options with checkboxes: Optional Web Services, Lifecycle API, Credential Web Service, Device Management API, Mobile iOS OTA, Reporting Web Service, SCEP API, MyID Verification Service, Provisioning API (rest.provision), Derived Credentials Notifications Listener, Self-Service Request Portal Web Service, Standalone Authentication Server, AD FS Auth Web Service, and Standalone Authentication Service (web.oauth2.ext). At the bottom of the window are four buttons: 'Help', '< Back', 'Next >', and 'Cancel'.

| Select All                                                                    | Select None                                                                 |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| <input type="checkbox"/> Application Server                                   | <input type="checkbox"/> Optional Web Services                              |
| <input type="checkbox"/> Database Server                                      | <input type="checkbox"/> Lifecycle API                                      |
| <input type="checkbox"/> Archive Database Server                              | <input type="checkbox"/> Credential Web Service                             |
| <input type="checkbox"/> MyID Client Support (select all for Operator Client) | <input type="checkbox"/> Device Management API                              |
| <input type="checkbox"/> Web Server & Operator Client                         | <input type="checkbox"/> Mobile iOS OTA                                     |
| <input type="checkbox"/> MyID Client Web Service (MWS)                        | <input type="checkbox"/> Reporting Web Service                              |
| <input type="checkbox"/> Core API (rest.core)                                 | <input type="checkbox"/> SCEP API                                           |
| <input type="checkbox"/> Authentication Service (web.oauth2)                  | <input type="checkbox"/> MyID Verification Service                          |
|                                                                               | <input type="checkbox"/> Provisioning API (rest.provision)                  |
|                                                                               | <input type="checkbox"/> Derived Credentials Notifications Listener         |
|                                                                               | <input type="checkbox"/> Self-Service Request Portal Web Service            |
|                                                                               | <input type="checkbox"/> Standalone Authentication Server                   |
|                                                                               | <input type="checkbox"/> AD FS Auth Web Service                             |
|                                                                               | <input type="checkbox"/> Standalone Authentication Service (web.oauth2.ext) |

## 2.2 Security settings

When the Lifecycle API web service (MyIDEnroll) is installed, it is configured so that it is impossible to authenticate to the service (a combination of **ASP.Net Impersonation** and **Windows Authentication** means you cannot call the web service). If you try to call the web service, you will see an error similar to the following:

```
HTTP Error 500.24 - Internal Server Error
```

The Lifecycle API is a powerful feature that allows a caller to add users, edit users, and request issuance of credentials; therefore you *must* restrict its usage.

If your system requires the Lifecycle API to be available to trusted callers, you must configure IIS to allow this.


Review the authentication requirements for the MyIDEnroll web service in IIS and configure it. For more information, see the [Securing Websites and Web Services](#) guide.

For production systems, you must ensure anonymous access is disabled.

Once you have configured the authentication mechanism you want to use for MyIDEnroll, disable the **ASP.NET Impersonation** option for the web service in IIS; if you are not using **Windows Authentication**, you must also disable this option.

## 2.3 Overview

The web service communicates with the MyID server components (the BOL) to import the data.

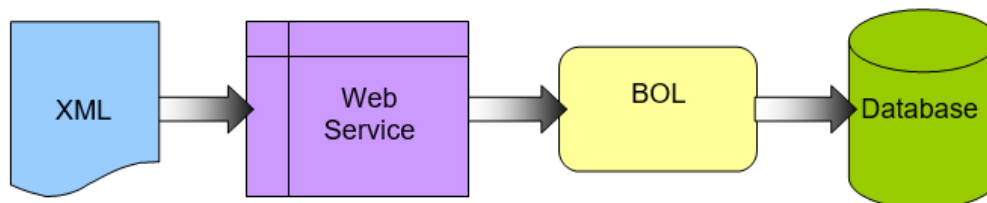

You post the XML document to the web service. This service processes the XML and passes the transformed data to the BOL.

The BOL performs actions on the data, updating the database if necessary, then returns a response to the web service describing the actions it has carried out. The web service then returns the status to the sender.

## 2.4 Increasing the maximum pool size

When using MyID web services (for example, MyIDEnroll) under heavy load, you may experience some problems; these may be caused by the .Net framework not releasing COM components correctly, affecting the eConfiguration objects used by MyID.

To solve this issue, you can increase the maximum pool size:

1. Open the Windows Component Services MMC snapin.
2. Expand **Component Service > Computers > My Computer > COM+ Applications > Edefice\_BOL > Components**.
3. Right-click **EConfiguration.Configuration.1**, then from the pop-up menu select **Properties**.
4. Click the **Activation** tab.
5. Set the **Maximum Pool Size** to 100.
6. Click **OK**.

Once you have made the change, you must restart the Edefice\_BOL component.

1. Open the Windows Component Services MMC snapin.
2. Expand **Component Service > Computers > My Computer > COM+ Applications**.
3. Right-click **Edefice\_BOL** and select **Shut down** from the pop-up menu.

The component will start again automatically when it is next needed.

## 2.5 Timeouts

If the import process takes too long to process, the Lifecycle API returns an error message stating that the process timed out. For example:

```
<PivImportResponse xmlns="http://www.intercede.com/MyIDPIVSchema/PIVImportResponse">
  <error>
    <description>System.Runtime.InteropServices.COMException (0x800468CA): Error:
0x800468ca : AsyncJob - Timed out waiting for import response
Info: ASyncImport.EXE
-----
Exception raised in function: CFileImportImpl::ProcessFileImport
In file .\FileImportImpl.cpp at line 475

    at EDEFICE_BOLLib.EdeficeBOLClass.ProcessFileImport(String bstrXMLInstructions)
    at MyIDEnroll.transferData(XmlDocument outputXML)
    at MyIDEnroll.PIVXMLWebImport(String xmlIn)</description>
  </error>
</PivImportResponse>
```

The timeout is set to 60 seconds by default. If you want to change this value, you can edit the registry on the MyID application server.

In the following area of the registry:

HKEY\_LOCAL\_MACHINE\SOFTWARE\Intercede\Edefice\ImportExport

Set the `Timeout` DWORD value to the number of seconds the service will wait for an import to complete.

## 2.6 Supported options

Items that are marked as "not supported" are part of the schema definition, but must not be used. These items may be legacy functionality that is no longer available, reserved for future use, or require additional changes to your MyID server to enable their use.

## 2.7 Known issues

- **IKB-67 – Limit to concurrent transactions**

Performance of this web service may vary based on a range of factors. This includes network load, server performance, and the volume of transactions taking place within the MyID architecture. For example, the API is expected to operate correctly with up to 15 concurrent transactions taking place. However, beyond this level, further issues may occur such as database timeouts. Increasing server performance may help overcome these issues, but the predicted volumes for your business processes should be part of your capacity planning of the solution.

- **IKB-288 – Job ID not returned for some job types**

When an update or certificate renewal job for a device is requested using the Lifecycle API, an issue has been identified that causes the Job ID not to be returned to the calling system.

The response received is:

```
<CardRequest>0</CardRequest>
```

However, the job will have been created successfully in MyID.

- **Import files remain on the server**

Whenever MyID processes a call to the Lifecycle API, it creates a file in the following location:

```
C:\Program Files\Intercede\MyID\Components\FileImport\Response
```

These files are not deleted. You are recommended to set up a process to delete old files periodically; for example, you can use the following command at the Windows command prompt:

```
forfiles /p "C:\Program  
Files\Intercede\MyID\Components\FileImport\Response" /s /m *.* /D -30  
/C "cmd /c del @path"
```

which deletes all files in that folder older than 30 days.

## 2.8 Limitations

This section contains known limitations with using the Lifecycle API with MyID CMS.

### 2.8.1 Restricting inactive users

If you are using the feature that restricts the access to administrative MyID features for users who have not logged in for a set amount of time (see the *Restricting inactive users* section in the [Administration Guide](#)), be aware that the **Reset logon date when access to operations is changed to unrestricted** configuration option does not affect user accounts if

you use the Lifecycle API to change a person from restricted to unrestricted; in this case, when you use the Lifecycle API to update the person's restricted status, their last logon date does *not* change.

## 3 Preparing the data for import

You must create an XML document containing all of the data you want to import using the XML web import service.

The XML document may contain information such as:

- Data for a user
- Core user fields
- User security phrases
- User role and scope to use
- Entrust profile to use
- Extended user fields
- Core group fields
- Extended group fields
- Credential profile to use
- Card expiry date
- Card renewal request
- Images: user photographs and document scans

To make sure the data is transformed into the correct format, you must use an XML schema supported by MyID. See section 7, [Data structure](#) for details of the schemas you can use.

Different schemas are available for adding new users to MyID and updating existing users.

### 3.1 CMS and PIV differences

While the CMS and PIV schemas have similarities, the PIV schema contains extra information to allow you to import information about PIV applicants and PIV agencies, and is appropriate only for PIV-based systems.

In addition, where the user node in CMS schemas is called `<User>`, in PIV the corresponding node is `<Applicant>`. Similarly, in CMS schemas, the group node is called `<Group>`, while in PIV the corresponding node is `<Agency>`.

**Note:** Do not use the CMS schemas to request or update PIV cards. You can, however, use the CMS schemas to request or update CIV cards.

## 3.2 Escaping characters

You must use valid XML for your import files; this includes escaping special characters such as `&`, `<` and `>`. If the XML is invalid, the import service will not process it.

### 3.2.1 DNs

MyID assumes that the DN is correctly escaped; if it is not, any people in that group will have invalid DNs. To correct this, you must remove the person, correct the group base DN, then add the person again.

The characters that you must escape are:

`, = + < > \ # ; "`

To use any of these characters, you must enclose them in double quotes. Additionally, you must prefix any `"` (double quote) or `\` (slash) character with a `\` (slash).

For example:

`John Smith, Jnr`

should be escaped as

`cn="John Smith, Jnr", o=...`

If you have an `o` value of:

`Smith "Budget" Cars`

this should be escaped as:

`o="Smith \"Budget\" Cars", c=...`

## 3.3 Encoding images

You must encode the images with Base64 encoding within the XML document. The XML web import service can then extract the image data and upload the images to the MyID database.

### 3.4 Advanced settings defaults file

The default settings are stored in a file called `settings.xml` in the same folder as the `MyIDEnroll.asmx` file. By default, this is:

`C:\Program Files\Intercede\MyID\Web\MyIDEnroll\`

The following parameters are available:

- `SourceID`
- `IssueDate`
- `GenerateUserDN`
- `ActionOnDuplicate`
- `RolesActionOnDuplicate`
- `DeleteMissingUsers`
- `PushToLDAP`
- `CreateUnknownGroups`
- `AuditAll`
- `DataType`
- `CheckImportResponseSchema`
- `SynchronousImport` – not supported. Do not use.
- `DefaultUserRole`
- `DisallowCertificateSuspension` – PIV systems only.
- `CardRequestThrottling` – PIV systems only.

You can also include these settings in your XML import document; these settings override any default settings from the `settings.xml` file. If the settings are missing from the XML document, the values in the `settings.xml` file are used instead.

See section 5, [Advanced settings](#) for details of the parameters available in the XML import document.

### 3.5 Adding and modifying users

When you provide the XML import information to the import web service, if the user does not already exist, the user is created. If the user already exists, but you provide different details for the user, the user is updated in the MyID database.

### 3.6 Requesting cards

When you provide the XML information to the import web service, if you provide details of a card in the `<Card>` node, a card request is created.

**Note:** If the user already exists in the database, you must set the `<Renewal>` node to `true`, or card request jobs will *not* be created.

## 3.7 Enabling, disabling and removing users

You can use the import feature to enable, disable or remove users. To disable or remove a user, add a keyword to the XML import file.

### 3.7.1 Removing users

In the user node (`User` for CMS, `Applicant` for PIV), add an `<Actions>` node. Within this, add the following to remove the user:

```
<ApplicantAction>Remove</ApplicantAction>
<StatusMappingID>ID</StatusMappingID>
<RevocationComment>Comment</RevocationComment>
```

Where `ID` is the ID of the revocation or suspension code from the `StatusMapping` table in the database (see section 3.7.5, [Status mapping codes](#)), and `Comment` specifies the comment used when revoking or suspending user certificates, and also appears in the system audit reports.

### 3.7.2 Disabling users

To disable a user, use the following:

```
<ApplicantAction>Disable</ApplicantAction>
<StatusMappingID>ID</StatusMappingID>
<RevocationComment>Comment</RevocationComment>
```

Where `ID` is the ID of the revocation or suspension code from the `StatusMapping` table in the database (see section 3.7.5, [Status mapping codes](#)), and `Comment` specifies the comment used when revoking or suspending user certificates, and also appears in the system audit reports.

The user is removed or disabled, and their cards and certificates are canceled or suspended as appropriate.

- **IKB-261 – User certificates not revoked when suspending a user with an `ApplicantAction` of `Disable`**

When disabling a user using the Lifecycle API, certificates are suspended instead of fully revoked, when the `StatusMappingID` specified should result in a full revocation. To work around this issue, trigger device revocation before suspending the user account using `CancelDevices`; see section 3.10.1, [Canceling cards](#).

Alternatively, adding `DisallowCertificateSuspension` to the `settings.xml` with a value of `1` will allow the status mapping to be used to determine specific revocation actions that take place; see section 5, [Advanced settings](#) for details.

### 3.7.3 Enabling users

If you omit the `<Actions>` node, and the user is already in the database and disabled, the import process enables the user again.

### 3.7.4 Updating users who were imported from LDAP

If you are using the Lifecycle API to update users who were originally imported from LDAP, and you want the changes to be pushed to the directory, you must include the user's `Group` node to allow the update to determine the LDAP ID.

### 3.7.5 Status mapping codes

The following table lists the default status mapping codes from the `StatusMapping` table in the MyID database.

**Note:** These are the default settings, and may be customized for your own installation. When using the Lifecycle API, you cannot specify the mapping codes with negative IDs – these are reserved for system use.

| ID  | Status                                             | Description                                                                 |
|-----|----------------------------------------------------|-----------------------------------------------------------------------------|
| -11 | Other Device issued - cancel                       | System use only, do not use.                                                |
| -10 | Device issued disabled                             | System use only, do not use.                                                |
| -9  | Automated card update                              | System use only, do not use.                                                |
| -8  | Automated shared certificate update                | System use only, do not use.                                                |
| -7  | Update requested by API                            | System use only, do not use.                                                |
| -6  | Other Device issued                                | System use only, do not use.                                                |
| -5  | Revoked/Suspend for timeout at deferred collection | System use only, do not use.                                                |
| -4  | Revoked/Suspend due to timeout in issuance         | System use only, do not use.                                                |
| -3  | Revoked/Suspended due to user disabled in LDAP     | System use only, do not use.                                                |
| -2  | Revoked due to user removal from LDAP              | System use only, do not use.                                                |
| -1  | Revoked due to too many suspensions                | System use only, do not use.                                                |
| 0   | Unspecified or Automated Processes                 | System use only, do not use.                                                |
| 1   | Lost                                               | The device has been permanently lost.                                       |
| 2   | Damaged                                            | The device has been rendered inoperable and should be permanently replaced. |
| 3   | Stolen                                             | The device has been stolen and should be replaced.                          |
| 4   | Forgotten                                          | The device has been misplaced and a temporary replacement is required.      |
| 5   | Permanently Blocked                                | The device should no longer be used.                                        |
| 6   | Compromised                                        | The device has been compromised. A replacement is required.                 |

| ID | Status                                 | Description                                                                                                                                            |
|----|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7  | Device holder on leave                 | The device holder is away temporarily and the device should no longer work until it is re-enabled.                                                     |
| 8  | Pending Investigation                  | The device is being investigated and should be suspended temporarily. The device should no longer work until it is re-enabled.                         |
| 9  | Non-payment of services                | The device should be disabled permanently.                                                                                                             |
| 10 | Device holder leaving or changing role | The device holder has left their current role and their device should be blocked permanently.                                                          |
| 11 | Device holder details change           | Information about the device holder has been changed and a new device is needed.                                                                       |
| 12 | Pending Activation                     | The device is temporary suspended pending activation.                                                                                                  |
| 15 | Revocation (other)                     | The device has been permanently blocked for a user-defined reason.                                                                                     |
| 16 | Suspension (other)                     | The device has been temporarily suspended for a user-defined reason.                                                                                   |
| 17 | Found Original                         | This temporary device has been revoked because the device holder found their original device.                                                          |
| 18 | Original device Compromised            | The original device has been compromised so this device must also be considered to have been compromised.                                              |
| 19 | Request device Renewal                 | This device is being replaced or refreshed and shall no longer be active on the system; all certificates will be available for the replacement device. |
| 20 | Batch Failed                           | The device was as part of a batch that failed and must be permanently cancelled.                                                                       |
| 21 | Bureau Failure                         | There was a failure at the bureau and the device must be permanently cancelled.                                                                        |
| 22 | Processing Failure                     | There was a processing failure and the device must be permanently cancelled.                                                                           |
| 25 | Poor print quality                     | The device was printed to an unacceptable standard and must be permanently cancelled.                                                                  |
| 26 | Printing misaligned                    | The printing on the device is not aligned properly and the device must be permanently cancelled.                                                       |
| 27 | Poor lamination quality                | The device was laminated incorrectly and must be permanently cancelled.                                                                                |
| 28 | Incorrect layout printed               | The device was printed with the incorrect layout and must be permanently cancelled.                                                                    |
| 32 | Cancel device and leave Certificates   | The device is to be cancel but the certificates are to remain active.                                                                                  |
| 33 | Cancel Certificates and leave device   | The certificates are to be cancelled but the device is to remain active.                                                                               |

| ID | Status                                          | Description                                                                                                                                                     |
|----|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 | Derived Credential Original Revoked             | Cancels Derived Credentials on notification of the original credential being revoked.                                                                           |
| 66 | Derived Credential Notification Listener        | Cancels Derived Credentials on notification of the original credential being revoked.                                                                           |
| 70 | Compromised – Reissue Shared Certificates       | A device has been compromised; any certificates shared with other devices will be reissued.                                                                     |
| 71 | Credential Profile Update (no revocation)       | There has been an update to the credential profile, but no certificates will be revoked.                                                                        |
| 72 | Credential Profile Update (full revocation)     | There has been an update to the credential profile and all certificates will be revoked.                                                                        |
| 73 | Details Change – re-issue archived certificates | The user's details have been changed and all certificates must be re-issued. Non-archived certificates will not be revoked.                                     |
| 74 | Mobile Issued                                   | Mobile issued, cancel Certificate Package.                                                                                                                      |
| 75 | Reissue credentials                             | Credentials are being re-issued.                                                                                                                                |
| 76 | 8 Hour access                                   | 8 Hour access.                                                                                                                                                  |
| 77 | 24 Hour access                                  | 24 Hour access                                                                                                                                                  |
| 78 | 2 Day access                                    | 2 Day access.                                                                                                                                                   |
| 79 | 1 Week access                                   | 1 Week access.                                                                                                                                                  |
| 80 | Cancel temporary card during replacement        | Cancel temporary card during replacement certificates are revoked and device cancelled.                                                                         |
| 81 | Unrestricted access                             | Unrestricted access.                                                                                                                                            |
| 82 | Reissue mobile                                  | Reissue a partially issued mobile credential.                                                                                                                   |
| 83 | User details have changed                       | Used when requesting a card update and the user's details have changed, requiring a reprovision of the card.                                                    |
| 84 | There is a problem with the device              | Used when requesting a card update and there is a problem with the card, requiring a reprovision of the card.                                                   |
| 85 | New credential profile needs to be applied      | Used when requesting a card update and significant credential profile changes, for example data model changes, are needed, requiring a reprovision of the card. |
| 86 | New certificates need to be added to the device | Used when requesting a card update when there are only certificate changes required.                                                                            |

### 3.7.5.1 Status mapping actions for PIV systems

The following table shows the specific actions for certificates and archived certificates for each status mapping code on a PIV system.

| ID  | PKI Action                                   | Archive PKI Action (PIV)                                                         |
|-----|----------------------------------------------|----------------------------------------------------------------------------------|
| -11 | Revoke.                                      | Revoke.                                                                          |
| -10 | Suspend.                                     | Suspend.                                                                         |
| -9  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -8  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -7  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -6  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -5  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -4  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -3  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| -2  | Revoke.                                      | Revoke.                                                                          |
| -1  | Revoke.                                      | Revoke.                                                                          |
| 0   | Revoke.                                      | Revoke.                                                                          |
| 1   | Revoke.                                      | Revoke.                                                                          |
| 2   | Revoke.                                      | Revoke.                                                                          |
| 3   | Revoke.                                      | Revoke.                                                                          |
| 4   | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 5   | Revoke.                                      | Revoke.                                                                          |
| 6   | Revoke.                                      | Revoke.                                                                          |
| 7   | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 8   | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 9   | Revoke.                                      | Revoke.                                                                          |
| 10  | Revoke.                                      | Revoke.                                                                          |
| 11  | Revoke.                                      | Revoke.                                                                          |
| 12  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |

| ID | PKI Action                                                                       | Archive PKI Action (PIV)                                                         |
|----|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| 15 | Revoke.                                                                          | Revoke.                                                                          |
| 16 | Suspend.                                                                         | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 17 | Revoke.                                                                          | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 18 | Revoke.                                                                          | Revoke.                                                                          |
| 19 | Do not revoke; allow recovery to new device.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 20 | Revoke.                                                                          | Revoke.                                                                          |
| 21 | Revoke.                                                                          | Revoke.                                                                          |
| 22 | Do not revoke.                                                                   | Revoke.                                                                          |
| 25 | Revoke.                                                                          | Revoke.                                                                          |
| 26 | Revoke.                                                                          | Revoke.                                                                          |
| 27 | Revoke.                                                                          | Revoke.                                                                          |
| 28 | Revoke.                                                                          | Revoke.                                                                          |
| 32 | Do not revoke. Certificate is available for live recovery on subsequent devices. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 33 | Revoke.                                                                          | Revoke.                                                                          |
| 66 | Revoke.                                                                          | Revoke.                                                                          |
| 70 | Revoke.                                                                          | Revoke.                                                                          |
| 71 | Do not revoke; allow recovery to new device.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 72 | Revoke.                                                                          | Revoke.                                                                          |
| 73 | Do not revoke; allow recovery to new device.                                     | Revoke.                                                                          |
| 74 | Suspend.                                                                         | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 75 | Do not revoke. Certificate is available for live recovery on subsequent devices. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 76 | Revoke.                                                                          | Revoke.                                                                          |
| 77 | Revoke.                                                                          | Revoke.                                                                          |
| 78 | Revoke.                                                                          | Revoke.                                                                          |
| 79 | Revoke.                                                                          | Revoke.                                                                          |
| 80 | Revoke.                                                                          | Revoke.                                                                          |
| 81 | Revoke.                                                                          | Revoke.                                                                          |
| 82 | Revoke.                                                                          | Revoke.                                                                          |
| 83 | Revoke.                                                                          | Revoke.                                                                          |
| 84 | Revoke.                                                                          | Revoke.                                                                          |
| 85 | Revoke.                                                                          | Revoke.                                                                          |
| 86 | Revoke.                                                                          | Revoke.                                                                          |

### 3.7.5.2 Status mapping actions for non-PIV systems

The following table shows the specific actions for certificates and archived certificates for each status mapping code on a non-PIV system.

| ID   | PKI Action                                   | Archive PKI Action (non-PIV)                                                     |
|------|----------------------------------------------|----------------------------------------------------------------------------------|
| – 11 | Revoke.                                      | Revoke.                                                                          |
| – 10 | Suspend.                                     | Suspend.                                                                         |
| – 9  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 8  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 7  | Do not revoke; allow recovery to new device. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 6  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 5  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 4  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 3  | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| – 2  | Revoke.                                      | Revoke.                                                                          |
| – 1  | Revoke.                                      | Revoke.                                                                          |
| 0    | Revoke.                                      | Revoke.                                                                          |
| 1    | Revoke.                                      | Revoke.                                                                          |
| 2    | Revoke.                                      | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 3    | Revoke.                                      | Revoke.                                                                          |
| 4    | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 5    | Revoke.                                      | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 6    | Revoke.                                      | Revoke.                                                                          |
| 7    | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 8    | Suspend.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 9    | Revoke.                                      | Revoke.                                                                          |
| 10   | Revoke.                                      | Revoke.                                                                          |
| 11   | Revoke.                                      | Revoke.                                                                          |

| ID | PKI Action                                                                       | Archive PKI Action (non-PIV)                                                     |
|----|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| 12 | Suspend.                                                                         | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 15 | Revoke.                                                                          | Revoke.                                                                          |
| 16 | Suspend.                                                                         | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 17 | Revoke.                                                                          | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 18 | Revoke.                                                                          | Revoke.                                                                          |
| 19 | Do not revoke; allow recovery to new device.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 20 | Revoke.                                                                          | Revoke.                                                                          |
| 21 | Revoke.                                                                          | Revoke.                                                                          |
| 22 | Do not revoke.                                                                   | Revoke.                                                                          |
| 25 | Revoke.                                                                          | Revoke.                                                                          |
| 26 | Revoke.                                                                          | Revoke.                                                                          |
| 27 | Revoke.                                                                          | Revoke.                                                                          |
| 28 | Revoke.                                                                          | Revoke.                                                                          |
| 32 | Do not revoke. Certificate is available for live recovery on subsequent devices. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 33 | Revoke.                                                                          | Revoke.                                                                          |
| 66 | Revoke.                                                                          | Revoke.                                                                          |
| 70 | Revoke.                                                                          | Revoke.                                                                          |
| 71 | Do not revoke; allow recovery to new device.                                     | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 72 | Revoke.                                                                          | Revoke.                                                                          |
| 73 | Do not revoke; allow recovery to new device.                                     | Revoke.                                                                          |
| 74 | Suspend.                                                                         | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 75 | Do not revoke. Certificate is available for live recovery on subsequent devices. | Do not revoke. Certificate is available for live recovery on subsequent devices. |
| 76 | Revoke.                                                                          | Revoke.                                                                          |
| 77 | Revoke.                                                                          | Revoke.                                                                          |
| 78 | Revoke.                                                                          | Revoke.                                                                          |
| 79 | Revoke.                                                                          | Revoke.                                                                          |
| 80 | Revoke.                                                                          | Revoke.                                                                          |
| 81 | Revoke.                                                                          | Revoke.                                                                          |
| 82 | Revoke.                                                                          | Revoke.                                                                          |
| 83 | Revoke.                                                                          | Revoke.                                                                          |

| ID | PKI Action | Archive PKI Action (non-PIV) |
|----|------------|------------------------------|
| 84 | Revoke.    | Revoke.                      |
| 85 | Revoke.    | Revoke.                      |
| 86 | Revoke.    | Revoke.                      |

## 3.8 Importing additional fields

**Note:** Attempting to import an additional field that does not exist in the database causes a failure.

### 3.8.1 Additional user fields

You can import information into additional extended fields using the data import. In the user node, add an `<AdditionalFields>` node. Within this, add a node for each additional user (`xu`) field you want to import for the user.

For example:

```
<AdditionalFields>
  <Xu1000>User Information</Xu1000>
  <Xu1001>More User Information</Xu1001>
  <Xu1002>Even More User Information</Xu1002>
</AdditionalFields>
```

### 3.8.2 Additional group fields

You can also add additional information to the group. For CMS, within the group node, add an `<AdditionalFields>` node. For PIV, within the agency node, add an `<AdditionalAgencyFields>` node.

Within this, add a node for each additional group (`xg`) field that you want to import into the group's record.

For example:

```
<AdditionalFields>
  <Xg1000>Group Information</Xg1000>
</AdditionalFields>
```

If you add extended user (`xu`) fields to the `AdditionalFields` node in the group node, or extended group (`xg`) fields to the `AdditionalFields` node in the user node, these are ignored.

### 3.8.3 Additional job fields

To add additional information to the job created, add an `<AdditionalFields>` node to the `<Card>` node. Within this, add a node for each additional job (`xj`) field you want to import.

### 3.9 Importing users into Entrust

If you add the `<EntrustProfile>` node to the `<Account>` node, you can specify an Entrust profile for the user. If this node is present in the import XML, the user is added to Entrust using the specified Entrust Profile Template.

For example:

```
<Account>
...
<EntrustProfile>MyEntrustTemplate</EntrustProfile>
</Account>
```

### 3.10 Canceling credentials and jobs

You can cancel credentials (for example, smart cards) and jobs using the `CMSCardRequest` method through the import service.

**Note:** If you want to cancel credentials or jobs, you do not have to include a `Card` node unless you also want to request a card at the same time.

### 3.10.1 Canceling cards

To cancel all of a user's credentials, pass an `ApplicantAction` of `CancelDevices`; for example:

```
<Actions>
  <ApplicantAction>CancelDevices</ApplicantAction>
  <StatusMappingID>ID</StatusMappingID>
  <RevocationComment>Comment</RevocationComment>
</Actions>
```

To cancel a specific credential, pass an `ApplicantAction` of `CancelDevice`. To identify the card you must include a `Device` node containing the card's serial number and device type.

You can cancel more than one credential in a single request by including more than one `Device` element.

Because not all systems track the serial number of the card, you can use a lookup mechanism to identify the card. For each field you want to look up, include the following:

```
<DeviceIdentifier>
  <SerialNumber>[identifier]</SerialNumber>
  <SerialNumberField>[field to look up]</SerialNumberField>
</DeviceIdentifier>
```

The field can be the name of any field present in the `vDevices` view; for example, `SerialNumber` for the standard card serial number, or `HIDSerialNumber` for the HID serial number. You can have multiple `DeviceIdentifier` nodes for each device.

**Note:** If you do not include a `SerialNumberField` node, MyID will use a default value of `SerialNumber`.

For example, to cancel a card with `HIDSerialNumber0011778`, pass through the following:

```
<Actions>
  <ApplicantAction>CancelDevice</ApplicantAction>
  <StatusMappingID>ID</StatusMappingID>
  <RevocationComment>Comment</RevocationComment>
  <Device>
    <DeviceIdentifier>
      <SerialNumber>0011778</SerialNumber>
      <SerialNumberField>HIDSerialNumber</SerialNumberField>
    </DeviceIdentifier>
  </Device>
</Actions>
```

You can cancel only the cards associated with the applicant. You can cancel suspended cards. You must pass the fields `StatusMappingID` and `RevocationComment` as normal.

### 3.10.2 Canceling jobs

To cancel all a user's jobs, pass an `ApplicantAction` of `CancelAllJobs`; for example:

```
<Actions>
  <ApplicantAction>CancelAllJobs</ApplicantAction>
</Actions>
```

**Note:** If the card is currently being processed by the bureau, the job is failed instead of canceled.

To cancel a single job, use an `ApplicantAction` of `CancelJob`, then include a `<Job>` node containing the ID of the job to cancel; for example:

```
<Actions>
  <ApplicantAction>CancelJob</ApplicantAction>
    <Job>12345</Job>
</Actions>
```

You can use the Reporting Web Service API to query the `Jobs` table to find the ID, or use Project Designer to create a custom MI Report that includes the ID in the list of jobs.

### 3.10.3 Filtering job cancellations

The feature to filter job cancellations using criteria is now "End of Life". The `Filters` node remains in the Lifecycle API schema, but cannot be used.

To cancel a specific job, use an `ApplicantAction` of `CancelJob`. See section [3.10.2, Canceling jobs](#) for details.

## 3.11 Importing operator credentials

As part of a user import, you can import a smart card that has been issued on an external system so that it can be used, unchanged, as an operator card in MyID. If the user account already exists, the operator card is added to the user's record.

You must create a credential profile that will be assigned to imported operator credentials. This credential profile must have the **Contact** capability and must be configured to use the **Imported Authentication** certificate policy in the Unmanaged certificate authority for MyID signing.

To import a device, you need to know the following details about the device:

- The credential profile name you want to use for the imported credential – specify in the `CardProfile` node.
- Serial number – specify in the `SerialNumber` node.
- Device type name – specify in the `DeviceType` node.
- The container name on the card that the certificate is stored in – specify in the `Container` node.
- The Base 64-encoded public part of the certificate to be used for signing – specify in the `Certificate` node.

The certificate must have a valid date; it cannot have expired, and cannot be valid from a future date. MyID does not carry out a CRL check.

If the **Validate logon certificate** option (on the **Logon** page of the **Security Settings** workflow) is set, the MyID application server must trust the issuing CA and have access to the CRL.

You must set the **Migrated Non-archived Certificate Policy** option (on the **Import & Export** page of the **Operation Settings** workflow) to the following value:

- Imported Authentication

This information is passed in through the `Card` node; a sample import may look like this:

```
<Card>
  <CardProfile>Imported Card</CardProfile>
  <ImportCard>true</ImportCard>
  <SerialNumber>1324657980</SerialNumber>
  <DeviceType>Oberthur ID-One PIV</DeviceType>
  <Container>5FC105</Container>
  <Certificate>MIIG1DCCBXygA ... =</Certificate>
</Card>
```

An imported card will have an expiry date that is the soonest of that defined in the credential profile and the expiry date of the provided certificate.

The imported card will be blocked from card lifecycle operations such as **Reset Card PIN** and **Erase Card**. You can still cancel the imported card using the **Cancel Credential** workflow; this prevents the card from being used to access MyID, but does not affect the content of the card or revoke its certificates.

Once imported, the device allows authentication to MyID. You can provide the imported user account with the appropriate permissions to access workflows.

**Note:** If the import of the operator device fails (for example, if the certificate has expired) or if you carry out a card lifecycle operation that is not allowed for imported cards (for example, requesting a replacement card) you may find that the license count has temporarily increased by one; the license count is recalculated every few hours, at which point the license count is set to the correct value.

## 4 Calling the import service

The MyIDEnroll web service is installed by default to the following location:

`http://<myservername>/MyIDEnroll/MyIDEnroll.asmx`

The MyIDEnroll web service consists of the following methods:

- `CMSXMLWebImport` – used for standard systems.
- `PIVXMLWebImport` – used for PIV/FIPS 201 systems.
- `XMLImport` – used to import data using the `EdeficeData` schema. This option is not supported.

These methods all take XML input parameters, and return an XML string representing the status of the operation; see section [4.1, Results](#) for details.

See section [8, MyIDEnroll WSDL](#) for details of the WSDL for the web service.

### 4.1 Results

When the import service completes the import, it passes back an XML report containing information on whether the user's record was imported correctly.

See section [7.3, CMSImportReponse structure](#) for details of the XML schema used to return this report.

For the PIV version of the response schema, see section [7.6, PivImportResponse structure](#).

Any errors (for example, if the XML document contains invalid characters) are returned as the response to the web service call. The errors are displayed as XML to make it easier for your system to parse them.

## 5 Advanced settings

To add these settings to your XML document, include a node called `Parameters` at the top level of the XML document. Any settings you provide here override the default settings provided in the `settings.xml` file; see section [3.4, Advanced settings defaults file](#).

For example:

```
<Parameters>
  <SourceID>Station1</SourceID>
  <IssueDate>2012-01-01</IssueDate>
  <GenerateUserDN>0</GenerateUserDN>
  <ActionOnDuplicate>REPLACE</ActionOnDuplicate>
  <RolesActionOnDuplicate>REPLACE</RolesActionOnDuplicate>
  <DeleteMissingUsers>0</DeleteMissingUsers>
  <PushToLDAP>1</PushToLDAP>
  <CreateUnknownGroups>1</CreateUnknownGroups>
  <AuditAll>1</AuditAll>
  <DataType>CMSRequestCard</DataType>
</Parameters>
```

**Note:** The parameters are described in the schema as a sequence, which means that the order is important.

The settings you can use are:

| Parameter         | Description                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SourceID          | The ID of the site.                                                                                                                                                                                                                                                                                                                                                                                       |
| IssueDate         | The date the XML document was created.                                                                                                                                                                                                                                                                                                                                                                    |
| GenerateUserDN    | This option is not supported. Set the value to 0.                                                                                                                                                                                                                                                                                                                                                         |
| ActionOnDuplicate | Determines what to do if the user already exists within MyID. The <code>LogonName</code> is used as the key to match user records.<br><br>REPLACE – replace the existing user with the new details.<br><br>Merge – merge the records.<br><br>MergeEmpty – add only the field data that was previously empty; do not overwrite any previous data.<br><br>Skip – abort the import. This generates an error. |

| Parameter              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RolesActionOnDuplicate | <p>Determines what to do if the roles already exist within MyID.</p> <p><code>REPLACE</code> or <code>Merge</code> – the user's roles and scope will be set to the roles indicated in the supplied XML, if a roles node is supplied. Any other roles held by the user will be removed.</p> <p><code>MergeEmpty</code> – any roles not already held by the user will be added with the scope indicated. If the user already holds the role then the scope will be updated to reflect the supplied data. To remove any existing roles held by the user, specify a <code>Scope</code> of <code>None</code>.</p> <p><code>Skip</code> – any roles not already held by the user will be added with the scope indicated. If the user already holds the role then it will not be altered. Any existing roles held by the user will not be removed.</p> |
| DeleteMissingUsers     | Not supported. Always set to 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| PushToLDAP             | <p>1 – add the user's details to the LDAP directory.</p> <p>0 – do not add the user's details to the LDAP directory.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| CreateUnknownGroups    | <p>Used to determine whether MyID creates groups that do not already exist.</p> <ul style="list-style-type: none"><li>• If set to 0, and the group specified does not exist, the import returns an error.</li><li>• If set to 1, and the new group does not specify a parent, the group is created under the root.</li><li>• If set to 1, and the new group specifies an existing parent group, the group is created under the parent.</li><li>• If set to 1, and the new group specifies a parent group that does not exist, the import returns an error.</li></ul> <p>This setting does not affect specified groups that already exist; it is only for new (unknown) groups.</p>                                                                                                                                                              |
| AuditAll               | <p>1 – add all user information fields to the audit trail.</p> <p>0 – add only the minimum information (user DN and full name) to the audit trail.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| Parameter                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>DataType</code>                  | <p>Determines the specific behavior of the import service, including DN formats and transforms that will be used.</p> <p><code>CMSRequestCard</code> – import a user's details and request a card. Uses the <code>CMSCardRequest</code> schema.</p> <p><code>CMSUserUpdate</code> – update an existing user. Uses the <code>CMSUserUpdate</code> schema.</p> <p><code>PIV</code> or <code>PIVRequestCard</code> – used for PIV card requests. Uses the <code>PivCardRequest</code> schema.</p> <p><code>PIVApplicantEnrol</code> – used to update existing PIV users. Uses the <code>PivApplicantUpdate</code> schema.</p>                                    |
| <code>CheckImportResponseSchema</code> | Set to 1 to prevent MyID from checking the returned XML against the response XML schema.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <code>SynchronousImport</code>         | Not supported. Do not use.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <code>AllowBioImport</code>            | <p>1 – allow the import of fingerprints.</p> <p>0 – do not allow the import of fingerprints, but allow the import of face scans.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <code>DefaultUserRole</code>           | <p>If you do not specify the <code>Role\Name</code>, <code>Scope</code> and <code>LogonMechanism</code> in the <code>Applicant\Account\Roles</code> section of the import file, you can specify them here. Separate the role name, scope and logon mechanism with pipes (<code> </code>). For example:</p> <p><code>Applicant Self Card</code></p> <p>specifies the <code>Applicant</code> role, with a scope of <code>Self</code>, and a logon mechanism of <code>Card</code>.</p> <p><b>Note:</b> This feature depends on the standard CMS or PIV XML structure. If you are using a custom schema with a custom transform, you may experience problems.</p> |

| Parameter                     | Description                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DisallowCertificateSuspension | <p>Set this value to 1, and when you cancel a user account using the Lifecycle API, MyID will not suspend the certificate, but uses the action associated with the <code>StatusMappingID</code>; for example, a status mapping of 100 will permanently revoke the certificate.</p> <p>Set this value to 0 to suspend the certificate when you cancel the user account.</p>                                          |
| CardRequestThrottling         | <p>This option prevents the submission of multiple card requests if several requests are received in quick succession. Generating card requests like this can cause the bureau request mechanism to reuse the same FASC-N for more than once card request.</p> <p>Set this value to 1 to enable the throttling behavior.</p> <p>Set this value to 0, or omit the parameter, to disable the throttling behavior.</p> |
| ReplaceUnassignedCards        | <p>Set to 1 to allow MyID to replace unassigned cards.</p> <p>Set to 0 to prevent MyID from replacing unassigned cards.</p>                                                                                                                                                                                                                                                                                         |

## 5.1 Custom schema and transform files

You can customize all Lifecycle API `xsd` and `xsl` schema and transform files by editing the web service configuration files. This allows you to override the schema and transform files provided with MyID with your own versions of those files; this means that you will not lose your schema and transform customizations when you update or upgrade your MyID installation.

To allow customizations to the schemas, add the following entries to MyIDEnroll web service `web.config` file:

```
<configSections>
  <section name="MyIDSettings" type="System.Configuration.DictionarySectionHandler"/>
</configSections>
<MyIDSettings configSource="myid.config" />
```

**Important:** The `<configSections>` node must be the first entry within the `<configuration>` node.

Once you have done this, you can add entries for schema and transform files to the `myid.config` file.

Add the key name and value name of the customized schema or transform file.

**Note:** All key names must be unique. For example:

```
<MyIDSettings>
  <add key="PIV" value="<Replacement schema for PivCardRequest.xsd>"></add>
  <add key="PIVRequestCard" value="<Replacement schema for PivCardRequest.xsd>"></add>
  <add key="PIVApplicantEnrol" value="<Replacement schema for
PivApplicantUpdate.xsd>"></add>
  <add key="CMSRequestCard" value="<Replacement schema for CMSCardRequest.xsd>"></add>
  <add key="CMSUpdateCard" value="<Replacement schema for CMSUserUpdate.xsd>"></add>
  <add key="PIV2MyID" value="<Replacement transform for PIV2MyID.xsl>"></add>
  <add key="CMS2MyID" value="<Replacement transform for CMS2MyID.xsl>"></add>
  <add key="BOL2CMSImportResponse" value="<Replacement transform for
BOL2CMSImportResponse.xsl>"></add>
  <add key="BOL2PIVImportResponse" value="<Replacement transform for
BOL2PIVImportResponse.xsl>"></add>
</MyIDSettings>
```

**Note:** The names of the keys do not always match the names of the schema files. PIV and PIVRequestCard both override the PivCardRequest.xsd schema – do not specify both in the config file.

You can use the following keys:

| Key                   | Replaces              | Type      |
|-----------------------|-----------------------|-----------|
| PIV                   | PivCardRequest        | Schema    |
| PIVRequestCard        | PIVCardRequest        | Schema    |
| PIVApplicantEnrol     | PivApplicantUpdate    | Schema    |
| CMSRequestCard        | CMSCardRequest        | Schema    |
| CMSUpdateCard         | CMSUserUpdate         | Schema    |
| PIV2MyID              | PIV2MyID              | Transform |
| CMS2MyID              | CMS2MyID              | Transform |
| BOL2CMSImportResponse | BOL2CMSImportResponse | Transform |
| BOL2PIVImportResponse | BOL2PIVImportResponse | Transform |

Note that you cannot override the PivImportResponse.xsd and CMSImportResponse.xsd files; if you want to alter these schemas, you must replace the files directly. However, you can disable validation of the post-transform response data.

The response schema validates the output from MyID after it is transformed by BOL2CMSImportResponse.xsl or BOL2PIVImportResponse.xsl.

**Important:** Do not include the .xsd or .xsl extensions for the replacement files in the web.config file.

### 5.1.1 Examples

For example, if you want to override the `PivCardRequest.xsd` schema with your own version, which is called `MyPIVSchema.xsd`, you would add the following:

```
<MyIDSettings>
  <add key="PIVRequestCard" value="MyPIVSchema"></add>
</MyIDSettings>
```

If you also wanted to replace the standard PIV transform with your own version called `MyPIVTransform.xsl`:

```
<MyIDSettings>
  <add key="PIVRequestCard" value="MyPIVSchema"></add>
  <add key="PIV2MyID" value="MyPIVTransform"></add>
</MyIDSettings>
```

### 5.1.2 Troubleshooting

If you experience problems when setting up custom transforms, you may want to enable logging for the Lifecycle API. See the *Logging for the Lifecycle API* section in the [Configuring Logging](#) guide.

## 6 Troubleshooting

This section contains information about troubleshooting, including:

- Configuring a log file for the Lifecycle API web service.  
See section [6.1, Logging](#).
- Troubleshooting folder permissions.  
See section [6.2, ASP.NET temporary folder permissions](#).
- Troubleshooting HTTP errors.  
See section [6.3, HTTP Error 500.24 – Internal Server Error](#).

### 6.1 Logging

If you experience problems when using the Lifecycle API, you may want to enable logging. See the *Logging for the Lifecycle API* section in the [Configuring Logging](#) guide.

### 6.2 ASP.NET temporary folder permissions

If your MyID web service user does not have permissions to the .NET framework folder, you may see an error similar to the following:

```
The current identity "mydomain\myiisuser" does not have write access to  
'C:\WINDOWS\Microsoft.NET\Framework\v2.0.50727\Temporary ASP.NET Files'.
```

To grant access to the web service user, run the `aspnet_regiis` command in the .NET folder mentioned in the error message:

```
C:\WINDOWS\Microsoft.NET\Framework\v2.0.50727> aspnet_regiis -ga  
"mydomain\myuser"
```

Replace `"mydomain\myuser"` with your system's MyID web service user.

### 6.3 HTTP Error 500.24 – Internal Server Error

This error can occur when you have not configured the authentication mechanisms the MyIDEnroll web service and disabled the **ASP.NET Impersonation** option in IIS.

See section [2.2, Security settings](#) for details.

## 7 Data structure

This section describes the structure of the data in the schemas.

The Lifecycle API uses the following XML schemas:

- `MyIDBaseTypes`  
Contains the common schema type for all of the MyID Lifecycle API schemas.
- `CMSSchemaTypes`  
Contains the common schema types for the `CMSCardRequest` and `CMSUserUpdate` schemas.
- `CMSCardRequest`  
Use this schema to create your XML files containing user data to send to the XML web import service. This schema defines the necessary information that you have to include for the import to be successful.  
See section [7.1, \*CMSCardRequest structure\*](#) for details.
- `CMSUserUpdate`  
Use this schema to create your XML files containing user data when you are updating an existing user in the MyID database.  
See section [7.2, \*CMSUserUpdate structure\*](#) for details.
- `CMSImportResponse`  
This is the schema used when the XML import service passes back information about the results of the user data import.  
See section [7.3, \*CMSImportResponse structure\*](#) for details.
- `PIVSchemaTypes`  
Contains the common schema types for the `PIVCardRequest` and `PIVApplicantUpdate` schemas.
- `PIVCardRequest`  
Use this schema to create your XML files containing PIV user data to send to the XML web import service. This schema defines the necessary information that you have to include for the import to be successful.  
See section [7.4, \*PivCardRequest structure\*](#) for details.
- `PIVApplicantUpdate`  
Use this schema to create your XML files containing user data when you are updating an existing PIV user in the MyID database.  
See section [7.5, \*PivApplicantUpdate structure\*](#) for details.
- `PIVImportResponse`  
This is the schema used when the XML import service passes back information about the results of the PIV user data import.  
See section [7.6, \*PivImportResponse structure\*](#) for details.

**Note:** Wherever a node is marked in the schema as a sequence, this order of the contents is important.

## 7.1 CMSCardRequest structure

This section describes the elements of the `CMSCardRequest` schema.

### 7.1.1 CMSCardRequest/Parameters

Contains the settings for the import. See section 5, [Advanced settings](#).

### 7.1.2 CMSCardRequest/Group

Contains details of the Group to which the user will belong. If the group does not exist, MyID can create the group, depending on your `Parameters` settings.

**Note:** A group created through the Lifecycle API does not inherit any default roles from its parent group, and you cannot set default roles through the Lifecycle API. This means that for any new users created within this new group, you must specify all of the roles that you want to assign; if you do not specify any roles, the user receives the default Cardholder and Password User roles.

### 7.1.3 CMSCardRequest/Group/Name

Used to identify the group. Mandatory.

If you are specifying an existing group, this is the only element you need to include to identify the group. If you are specifying a new group, you can complete the rest of the elements to provide the details for the new group.

**Note:** Group names must be unique. The import will fail if two different groups have the same name as the specified group name.

**Note:** If you specify a group that has been linked to an LDAP OU in MyID, any users associated with the group will be synchronized with the directory if the `PushToLDAP` parameter is set to 1.

### 7.1.4 CMSCardRequest/Group/Description

The description of the group.

### 7.1.5 CMSCardRequest/Group/OrgUnit

The OU of the group.

### 7.1.6 CMSCardRequest/Group/Parent

The parent of the group.

Used for new groups only. This is the name of the group beneath which the specified group will be created. For new groups, if you do not specify a parent group, the new group is placed under the root.

**Note:** Parent group names must be unique. The import will fail if two different groups have the same name as the specified parent name.

### 7.1.7 CMSCardRequest/Group/AdditionalFields

Contains any extended group (xg) fields. See section 3.8, [Importing additional fields](#) or details.

### 7.1.8 CMSCardRequest/Group/User

Contains the details for the user for whom the card is being requested.

You can import a single user in each XML document.

**Note:** You do not have to include a User node if you are importing the details of a group.

#### 7.1.9 CMSCardRequest/Group/User/Personal

Contains the user's personal details. Mandatory.

#### 7.1.10 CMSCardRequest/Group/User/Personal/FirstName

Internal name: `FirstName`

The user's first name.

#### 7.1.11 CMSCardRequest/Group/User/Personal/LastName

Internal name: `Surname`

The user's last name.

**Note:** You must include one or both of `FirstName` and `LastName`. If you include both `FirstName` and `LastName`, make sure you specify them in that order – `FirstName` first, `LastName` immediately after. If you intend to supply only a `FirstName` or only a `LastName`, omit the other node – do not simply include an empty string.

#### 7.1.12 CMSCardRequest/Group/User/Personal/Initial

Internal name: `Initial`

The user's middle initials.

#### 7.1.13 CMSCardRequest/Group/User/Personal/Title

Internal name: `Title`

The user's title.

#### 7.1.14 CMSCardRequest/Group/User/Personal/Email

Internal name: `Email`

The user's email address. This address is used for email notifications.

#### 7.1.15 CMSCardRequest/Group/User/Personal/PhoneExt

Internal name: `PhoneExt`

The user's phone extension.

#### 7.1.16 CMSCardRequest/Group/User/Personal/MobileNumber

Internal name: `MobileNumber`

The user's mobile phone number.

#### 7.1.17 CMSCardRequest/Group/User/Personal/PhoneNumber

Internal name: `PhoneNumber`

The user's phone number.

#### 7.1.18 CMSCardRequest/Group/User/Personal/EmployeeID

Internal name: `EmployeeID`

This should be a unique identifier for the applicant.

#### 7.1.19 CMSCardRequest/Group/User/Personal/OptionalLine1

Internal name: `OptionalLine1`

Used to store extra information about the user.

#### 7.1.20 CMSCardRequest/Group/User/Personal/OptionalLine2

Internal name: `OptionalLine2`

Used to store extra information about the user.

#### 7.1.21 CMSCardRequest/Group/User/Personal/OptionalLine3

Internal name: `OptionalLine3`

Used to store extra information about the user.

#### 7.1.22 CMSCardRequest/Group/User/Personal/OptionalLine4

Internal name: `OptionalLine4`

Used to store extra information about the user.

#### 7.1.23 CMSCardRequest/Group/User/Authentication

Contains details of the security phrases to be used for the user.

**Note:** Currently, the schema does not provide validation on the `Authentication` element.

#### 7.1.24 CMSCardRequest/Group/User/Authentication/SecurityPhrase

Contains a pair of elements – a `Prompt` and an `Answer` – that provide a security phrase for the applicant.

You can have up to five `SecurityPhrase` elements, each containing a `Prompt` and `Answer` pair.

**Note:** If you provide any security phrases for an existing user, *all* existing security phrases on that user's account are removed and replaced with the newly-provided security phrases. You can use this feature to delete the security phrases from a user's account – provide a single `Prompt` with an empty `Answer`, and the user's security phrases will be removed. (If the minimum number of security phrases is set to 1, the user will still be prompted for a security phrase when attempting to log on, but will be unable to authenticate.)

#### 7.1.25 CMSCardRequest/Group/User/Authentication/SecurityPhrase/Prompt

Internal name: `Question` field in `SecurityQuestions`

Used to import a security question. If the question does not already exist, an entry is added to the `SecurityQuestions` table; this question will subsequently be available for use when setting security phrases in MyID.

The default security questions are:

| ID | Question             |
|----|----------------------|
| 1  | Password             |
| 2  | Mothers maiden name? |
| 3  | N.I number?          |
| 4  | Favourite food?      |

| ID | Question                 |
|----|--------------------------|
| 5  | Car registration number? |
| 6  | Name of pet              |
| 7  | First school attended    |
| 8  | An old phone number      |
| 9  | A memorable date         |
| 10 | A memorable place        |
| 11 | A memorable event        |
| 12 | A famous person          |
| 13 | Place of birth           |
| 14 | A country                |
| 15 | A river                  |
| 16 | A movie                  |
| 17 | A song                   |
| 18 | A book                   |
| 19 | A sport                  |
| 20 | A postcode               |
| 21 | An animal                |
| 22 | First car type           |

#### 7.1.26 CMSCardRequest/Group/User/Authentication/SecurityPhrase/Answer

Internal name: `SecurityPhrase` field in `UsersSecurityQuestions`

Used to import an answer to a security question for an applicant. A hash of the answer is stored in the `UsersSecurityQuestions` table.

**Important:** Do not include any leading or trailing spaces in the security phrase answer. If you do include leading or trailing spaces, the user will be unable to authenticate to MyID.

**Note:** If you have set up the **Security Phrase Complexity** option within MyID to determine the complexity of security phrases, this is not enforced on any passwords that you import using the Lifecycle API.

You can encrypt the answer using a transport key – this allows you to maintain the security of the security phrase answer when you include it in the XML data.

To encrypt the answer:

1. Import your AES128 transport key into MyID using the **Key Manager** workflow.
2. External to MyID, encrypt the security phrase answer with the following settings:
  - Encode the security phrase answer as little-endian Unicode. Do not use a byte order mark.  
  
For example, a security phrase of `answer` would be encoded as:  
`0061006E0073007700650072`
  - Pad the data using ISO9797 Method 2 (pad with a single 0x80, then 0x00 until the

block-length is reached).

- Encrypt using CBC or ECB mode encryption.
3. Add the hex-encoded encrypted data to the `Answer` node.
  4. Set the `KeyName` attribute of the `Answer` node to the name of the transport key you imported into MyID.
  5. Set the `Mode` attribute of the `Answer` node to either `CBC` or `ECB`, depending on how you encrypted the answer.

For example:

- The transport key, `MyTransportKey`, has a value of:

```
206890FC9B4EA1D0137D8C692B3BFCB6
```

- The security phrase is:

```
answer
```

- In the import, use the following:

```
<Answer KeyName="MyTransportKey"
Mode="CBC">6713987B589F76BC4DA0F557D79A6275</Answer>
```

If you do not want to encrypt the answer in the XML document, omit the `KeyName` and `Mode` attributes. For example:

```
<Answer>plaintextanswer1234</Answer>
```

### 7.1.27 CMSCardRequest/Group/User/Card

Contains details of the card to be requested for the user.

### 7.1.28 CMSCardRequest/Group/User/Card/CardProfile

If present, this will request a card using the specified credential profile for this applicant. If performing an update, or the credential profile does not exist, no request will be made.

**Note:** Credential profiles were previously known as card profiles.

### 7.1.29 CMSCardRequest/Group/User/Card/CardExpiryDate

Used to specify the expiry date for the card when it is issued. The card will expire on the date specified, or on the date the credential profile specifies, whichever is earlier.

The format is `YYYY-MM-DD` – for example, `2016-12-25`.

**Note:** If the **Expire Cards at End of Day** configuration option is set to Yes, the time portion of the card expiry date is set to 23:59 UTC – the end of the day. If the **Expire Cards at End of Day** option is set to No, the time portion is set to the time of the import. However, if the **Expire Cards at End of Day** option is set to No, *and* the card expiry date is constrained by an earlier card lifetime as configured in the credential profile, the time portion is set to 00:00 UTC – the start of the day.

**Note:** Some CAs do not allow control over the time portion of the certificate expiry. When MyID sets the lifetime of the certificate, the date is set as expected, but the time may not match exactly, depending on the certificate authority being used.

If you provide a date in the `CardExpiryDate` node, and this exceeds the **Maximum Expiry Date** set against the user account, the `CardExpiryDate` is ignored, and the **Maximum Expiry Date** is used in the request. This may be changed at the time of collection to an earlier date, if the lifetime configured in the credential profile limits it.

#### 7.1.30 CMSCardRequest/Group/User/Card/Renewal

Used to specify whether the card is a renewal of an existing card. If the user already exists, you must set this option to `true` or card request jobs will not be created.

Can be one of the following values:

- `true` – this is a card renewal.
- `false` – this is not a card renewal.

**Note:** For card renewals, you must specify the card's original serial number and device type using the `CMSCardRequest/Group/User/Card/Update` node.

#### 7.1.31 CMSCardRequest/Group/User/Card/ImportCard

Used to specify whether to import a device (see section 3.11, *Importing operator credentials*).

Can be one of the following values:

- `true` – import a device.
- `false` – do not import a device.

#### 7.1.32 CMSCardRequest/Group/User/Card/CardRequestedBy

This is the logon name of the person requesting the card. Used for auditing purposes.

#### 7.1.33 CMSCardRequest/Group/User/Card/CancelExisting

Used to specify whether existing jobs of the same type are canceled when the new job is created. Include the empty node if you want to cancel the existing jobs:

```
<CancelExisting/>
```

If you omit this node, existing jobs will not be canceled when the new job is created.

#### 7.1.34 CMSCardRequest/Group/User/Card/JobLabel

Used to specify a label for the job. You can use this label to search for and identify the job within MyID.

#### 7.1.35 CMSCardRequest/Group/User/Card/Update

Used to specify the card being updated or renewed. You must make sure that the card is issued to the user.

For updates, if you do not specify the `OriginalSerialNumber` and `OriginalDeviceType` for the card to be updated, the card currently assigned to the user is used.

For renewals, the `OriginalSerialNumber` and `OriginalDeviceType` for the card to be renewed are mandatory.

#### 7.1.36 CMSCardRequest/Group/User/Card/Update/OriginalSerialNumber

The serial number of the card being updated or renewed. Used to target a specific card.

- 7.1.37 CMSCardRequest/Group/User/Card/Update/OriginalDeviceType  
The device type of the card being updated or renewed.
- 7.1.38 CMSCardRequest/Group/User/Card/Update/StatusMapping  
The status mapping code to be used when the card is updated.  
See section [3.7.5, Status mapping codes](#).
- 7.1.39 CMSCardRequest/Group/User/Card/Update/ParametersXML  
Contains parameters for the card update job.
- 7.1.40 CMSCardRequest/Group/User/Card/Update/ParametersXML/UnlockPIN  
Not supported.
- 7.1.41 CMSCardRequest/Group/User/Card/Update/ParametersXML/ReIssue  
Set to 1 to request the reissuance of a device.  
Reissuance is a type of card update job that, when collected, carries out the following:
- Revokes existing certificates present on the device.
  - Re-applies data model electronic personalization.
  - Issues and writes a new set of certificates onto the device (according to the credential profile).
  - If the **Rotate Keys On Card Update** configuration option is set (on the **Issuance Processes** page of the **Operation Settings** workflow) applies the latest customer GlobalPlatform and PIV 9B keys.
- 7.1.42 CMSCardRequest/Group/User/Card/Replacement  
Used to specify the card to be replaced.  
**Note:** The **Card Renewal Period** configuration option (on the **Devices** page of the **Operation Settings** workflow) is ignored when requesting replacement cards through the Lifecycle API – it is possible to request short-lived replacement credentials through the API.
- 7.1.43 CMSCardRequest/Group/User/Card/Replacement/OriginalSerialNumber  
The serial number of the card to be replaced. Mandatory if you specify the `Replacement` node.
- 7.1.44 CMSCardRequest/Group/User/Card/Replacement/OriginalDeviceType  
The device type of the card to be replaced. Mandatory if you specify the `Replacement` node.
- 7.1.45 CMSCardRequest/Group/User/Card/Replacement/StatusMapping  
Used to specify the status mapping ID for certificates on the credentials that are being replaced. This node is used when performing a replacement request; note that if you are performing a card replacement, you use `CMSCardRequest/Group/User/Card/StatusMapping` instead.  
If you do not specify a `StatusMapping`, a status mapping ID of 1 – Lost – is used.  
See section [3.7.5, Status mapping codes](#).

#### 7.1.46 CMSCardRequest/Group/User/Card/GenerateOTP

**Note:** This feature reserved for future use. It is not currently possible to use OTPs when collecting jobs. Do not use in the current version of MyID.

Used to generate a One-Time Password (OTP) for use when collecting the job created by the import request. If you specify this element, the user must provide the OTP when collecting the job. You can specify a notification mechanism to provide this OTP to the user by including a `Notification` node.

If you do not specify a `Notification` node, the OTP is sent to the user's email address using the **Job OTP** email template.

#### 7.1.47 CMSCardRequest/Group/User/Card/GenerateOTP/Notification

Used to specify a notification method for OTPs.

#### 7.1.48 CMSCardRequest/Group/User/Card/GenerateOTP/Notification/Name

The `Name` of the notification from the `Notifications` table in the MyID database.

**Note:** You must have notifications configured correctly within MyID. For more information, contact Intercede professional services.

#### 7.1.49 CMSCardRequest/Group/User/Card/GenerateOTP/Notification/Action

Contains one of the following:

- `Event` – the notification is triggered once using the success data set up in the `Notifications` table. No further notifications are sent, even if the notification fails.
- `Success` – the notification is triggered using the success data set up in the `Notifications` table. If the notification fails, the back-up notifications set up in the fail data in the `Notifications` table are triggered.
- `Fail` – the notification is triggered using the fail data set up in the `Notifications` table. Multiple notifications are sent on a schedule specified by the `RetryDelays` in the `Notifications` table. You can use this option to force reminder notifications; the notification has not failed, but it is treated as a failed notification so that the retry system is triggered.

#### 7.1.50 CMSCardRequest/Group/User/Card/OriginalSerialNumber

Used in conjunction with the `CMSCardRequest/Group/User/Card/OriginalDeviceType` node to specify a credential to be replaced. These settings also specify the credential profile to use when replacing the card. The credential profile used to issue this specified card is used to issue the new card. Alternatively, you can specify the credential profile using the `CMSCardRequest/Group/User/Card/CardProfile` node.

In addition, if you specify the `OriginalSerialNumber` and `OriginalDeviceType` for the card, all credentials on the same physical credential are marked as being replaced.

The `CMSCardRequest/Group/User/Card/StatusMapping` determines what happens to the certificates on the credentials that are being replaced.

#### 7.1.51 CMSCardRequest/Group/User/Card/OriginalDeviceType

Used in conjunction with the `CMSCardRequest/Group/User/Card/OriginalSerialNumber` node to specify a credential to be replaced.

#### 7.1.52 CMSCardRequest/Group/User/Card/SerialNumber

Used in conjunction with the `CMSCardRequest/Group/User/Card/DeviceType` node to specify an exact card to be issued.

#### 7.1.53 CMSCardRequest/Group/User/Card/DeviceType

Used in conjunction with the `CMSCardRequest/Group/User/Card/SerialNumber` node to specify an exact card to be issued.

#### 7.1.54 CMSCardRequest/Group/User/Card/StatusMapping

Used to specify the status mapping ID for certificates on the credentials that are being replaced. This node is used when performing a card request; note that if you are performing a card replacement, you use

`CMSCardRequest/Group/User/Card/Replacement/StatusMapping` instead.

If you do not specify a `StatusMapping`, a status mapping ID of 1 – Lost – is used.

See section [3.7.5, Status mapping codes](#).

#### 7.1.55 CMSCardRequest/Group/User/Card/RevocationComment

A free text description that is stored against revoked certificates in the database.

#### 7.1.56 CMSCardRequest/Group/User/Card/Reprovision

Set the value of this node to 1 to request a reprovision rather than an update.

A reprovision allows you to re-encode a card completely, based on the data in the MyID database, using the latest version of the credential profile used during issuance.

The card will have the same expiry date as the original card. New certificates may have longer expiration times than the original certificates, but these will not exceed the lifetime of the card itself. Certificates that were revoked externally to MyID will be replaced with new active certificates.

When requesting a reprovision, specify a status mapping with one of the following values:

- 83 – User details have changed.
- 84 – There is a problem with the device.
- 85 – New credential profile needs to be applied.

**Note:** If you specify any other status mapping, it is ignored – only these status mappings carry out reprovisions.

For example:

```
<Card>
  <CardProfile>Yubikey NoOTP</CardProfile>
  <CardRequestedBy>System</CardRequestedBy>
  <OriginalSerialNumber>8115516</OriginalSerialNumber>
  <OriginalDeviceType>YubiKey 4</OriginalDeviceType>
  <StatusMapping>84</StatusMapping>
  <Reprovision>1</Reprovision>
</Card>
```

#### 7.1.57 CMSCardRequest/Group/User/Card/CardLayout

Optionally, contains the name of the card layout to use when printing the requested card.

The card layout name must be valid for the card's credential profile at the point that the card is issued; if the card layout name is not valid, the request will not be processed.

#### 7.1.58 CMSCardRequest/Group/User/Card/Container

Used in conjunction with the `CMSCardRequest/Group/User/Card/ImportCard` node to specify the container that the authentication certificate is located in.

See section [3.11, Importing operator credentials](#).

#### 7.1.59 CMSCardRequest/Group/User/Card/Certificate

Used in conjunction with the `CMSCardRequest/Group/User/Card/ImportCard` node to specify the authentication certificate on the imported card. This must be the base64 representation of the certificate without headers, footers, or line breaks.

See section [3.11, Importing operator credentials](#).

#### 7.1.60 CMSCardRequest/Group/User/Card/AdditionalFields

Used to specify additional job (xj) fields. Your system must already have been customized to set up these additional fields.

#### 7.1.61 CMSCardRequest/Group/User/CardUpdate

**Note:** This `CardUpdate` node is reserved for future use. Do not use. You can use the `CMSCardRequest/Group/User/Card/Update` node instead.

The `CardUpdate` element contains details of card update requirements for existing cards.

#### 7.1.62 CMSCardRequest/Group/User/CardUpdate/SerialNumber

Serial Number of the card to be updated.

#### 7.1.63 CMSCardRequest/Group/User/CardUpdate/DeviceType

Device Type of card to be updated (for example, 'Oberthur v3').

#### 7.1.64 CMSCardRequest/Group/User/CardUpdate/CardRequestedBy

The logon name of the person requesting the card update. Used for auditing purposes.

#### 7.1.65 CMSCardRequest/Group/User/CardUpdate/ParametersXML

XML describing the card updates to be performed. Currently supports only UnlockPIN.

#### 7.1.66 CMSCardRequest/Group/User/CardUpdate/ParametersXML/UnlockPIN

Not supported.

#### 7.1.67 CMSCardRequest/Group/User/CardUpdate/PIN

Reserved for future use.

#### 7.1.68 CMSCardRequest/Group/User/Account

Contains details of the user's account.

- 7.1.69 **CMSCardRequest/Group/User/Account/DN**  
Internal name: `DistinguishedName`  
The DN of the user's account in the LDAP.
- 7.1.70 **CMSCardRequest/Group/User/Account/CN**  
Internal name: `CommonName`
- 7.1.71 **CMSCardRequest/Group/User/Account/OU**  
Internal name: `OrganisationalUnit`
- 7.1.72 **CMSCardRequest/Group/User/Account/UPN**  
Internal name: `UserPrincipalName`
- 7.1.73 **CMSCardRequest/Group/User/Account/SAMAccountName**  
The SAM Account Name for the user.
- 7.1.74 **CMSCardRequest/Group/User/Account/LogonName**  
Internal name: `LogonName`  
The user's name, used to log into MyID. Must be unique.  
A `LogonName` is required for all operations. If no value is supplied, the `CMSCardRequest/Group/User/Personal/EmployeeID` value is used instead. For new user imports, the `EmployeeID` is copied to the user's new `LogonName` record; for actions on existing users, the `EmployeeID` is used to match against the `LogonName`.
- 7.1.75 **CMSCardRequest/Group/User/Account/NewLogonName**  
**Note:** This feature reserved for future use.  
Allows you to specify a new logon name for the user.
- 7.1.76 **CMSCardRequest/Group/User/Account/UniqueID**  
Maps onto the `objectGUID` attribute in Active Directory. When MyID synchronizes with the LDAP, it uses this `UniqueID` to map the users from MyID to the directory.  
If your directory does not have an `objectGUID` attribute, the Distinguished Name for the user is used instead.
- 7.1.77 **CMSCardRequest/Group/User/Account/Roles**  
Contains details of the MyID roles assigned to the user.  
**Note:** You can set any role for a user using the Lifecycle API – the roles you specify override any role restrictions. Also, the user will not receive any default roles that have been set up for their group; if you want to assign roles, you must include them explicitly. If you do *not* specify any roles, the user receives the default Cardholder and Password User roles.
- 7.1.78 **CMSCardRequest/Group/User/Account/Roles/Role**  
Contains details of the role you want to assign the applicant.
- 7.1.79 **CMSCardRequest/Group/User/Account/Roles/Role/Name**  
Internal name: `UserProfile`

The name of the role.

#### 7.1.80 CMSCardRequest/Group/User/Account/Roles/Role/Scope

Internal name: `Scope`

The scope of the role that the applicant is to have. The value must be one of the following:

- `None`
- `Self`
- `Department`
- `Division`
- `All`

**Note:** If you want to remove an existing role from a user's account, set the `Scope` to `None`, and the `RolesActionOnDuplicate` parameter to `MergeEmpty`.

#### 7.1.81 CMSCardRequest/Group/User/Account/Roles/Role/LogonMechanism

Internal name: `LogonMechanism`

Not supported. Do not use.

#### 7.1.82 CMSCardRequest/Group/User/Account/EntrustProfile

Specifies an Entrust profile template to use for the applicant. If specified, the applicant is added to Entrust using the template.

#### 7.1.83 CMSCardRequest/Group/User/Account/MaxRequestExpiryDate

Allows you to set the maximum credential expiry date for a person – this allows you to specify the latest expiry date for any device issued to this person. Note that card requests cannot exceed the **Lifetime** set in the credential profile. Also, the credential profile can override the maximum expiry date for a person using the **Ignore User Expiry Date** option.

If the **Expire Cards at End of Day** configuration option is set to Yes, the time portion of the user's maximum credential expiry date is set to 23:59 UTC – the end of the day. If the **Expire Cards at End of Day** option is set to No, the time portion is set to 00:00 UTC – the start of the day.

If you supply an expiry date in the `CardExpiryDate` node, it may also cause a check to be performed even when Max Request Expiry Date is not set in the same transaction using the Lifecycle API. See section [7.1.29, CMSCardRequest/Group/User/Card/CardExpiryDate](#).

**Note:** Some CAs do not allow control over the time portion of the certificate expiry. When MyID sets the lifetime of the certificate, the date is set as expected, but the time may not match exactly, depending on the certificate authority being used.

This setting affects all future device requests. It does not affect any issued devices or existing requests.

**Note:** This setting affects device requests made through the MyID Operator Client or the Lifecycle API. Requests made through MyID Desktop do not take this setting into account.

See the *Requesting a device for a person* section in the [MyID Operator Client](#) guide for more information.

#### 7.1.84 CMSCardRequest/Group/User/Account/UserDataApproved

Internal name: UserDataApproved

Contains information on whether card issuance is approved for this applicant. Can be one of the following values:

- YES or 1
- NO or 0

If you set the card profile to have the **Require user data to be approved** option, you must set this option before the card can be issued. This flag confirms that the data being sent to MyID has passed all the enrollment checks required for card issuance.

**Note:** The `VettingDate` defaults to the current date if `UserDataApproved` is set to YES or 1, and an explicit `VettingDate` is not provided in the request.

#### 7.1.85 CMSCardRequest/Group/User/Account/VettingDate

Internal name: `VettingDate`

Contains the date on which the applicant's identity checks were carried out. The format is:

YYYY-MM-DDThh:mm:ss

You can use this field to ensure that the applicant's identity checks are renewed periodically. See the *Identity checks* section in the [Administration Guide](#) for details.

#### 7.1.86 CMSCardRequest/Group/User/Account/UserSID

Allows you to provide the user security identifier (user SID) for a person.

For information on user SIDs, see the *Including user security identifiers in certificates* section in the [Administration Guide](#).

#### 7.1.87 CMSCardRequest/Group/User/Photo

Contains the applicant's photo.

#### 7.1.88 CMSCardRequest/Group/User/Photo/Encoding

The type of data encoded in the block. This can be one of the following:

- `jpg` – JPG image data.
- `gif` – GIF image data.
- `png` – PNG image data.
- `bmp` – Windows bitmap image data.
- `378` – INCITS 378 fingerprint data.
- `385` – facial biometrics in ANSI/INCITS 385-2004 format.

For details of importing fingerprints or facial biometrics, contact customer support.

#### 7.1.89 CMSCardRequest/Group/User/Photo/Data

A string of base64-encoded data containing the file to be uploaded.

#### 7.1.90 CMSCardRequest/Group/User/Photo/DateTaken

The date of the data; for example, when the photograph was taken, or when the fingerprints were captured.

This node uses the following format:

```
yyyy-mm-ddThh:mm:ss.nnn
```

For example:

```
2010-01-02T14:23:54.123
```

#### 7.1.91 CMSCardRequest/Group/User/Photo/Source

Not supported.

#### 7.1.92 CMSCardRequest/Group/User/Photo/None

Instead of providing a photograph, you can remove an existing user photograph and replace it with the `noImage.gif` default image.

To remove a user photograph, specify `_NULL_` in the `Photo` node; for example:

```
<Photo>
  <None>_NULL_</None>
</Photo>
```

**Note:** The image is removed from the user record, but is not removed from the MyID web server.

#### 7.1.93 CMSCardRequest/Group/User/AdminGroups

An optional node that allows you to specify one or more administrative groups for the user. See the Administration Guide for details of setting up and using administrative groups.

The `AdminGroups` node contains one or more `AdminGroup`.

For example:

```
<AdminGroups>
  <AdminGroup>
    <Name>Group 1</Name>
  </AdminGroup>
</AdminGroups>
```

or:

```
<AdminGroups>
  <AdminGroup>
    <Name>Group 1</Name>
  </AdminGroup>
  <AdminGroup>
    <Name>Group 2</Name>
  </AdminGroup>
</AdminGroups>
```

If the user has existing administrative groups, they are replaced by the specified group or groups. If you specify an empty `AdminGroups` node, this clears all of the user's administrative groups. If you do not specify an `AdminGroups` node, the user's administrative groups remain unchanged.

#### 7.1.94 CMSCardRequest/Group/User/AdminGroups/AdminGroup

Specifies an administrative group for the user. You can have multiple `AdminGroup` nodes in the `AdminGroups` parent node. An `AdminGroup` node contains a single `Name` node.

#### 7.1.95 CMSCardRequest/Group/User/AdminGroups/AdminGroup/Name

Specifies the name of the administrative group for the user.

**Note:** The group must already exist in the MyID database. If the group does not exist, the import will fail.

#### 7.1.96 CMSCardRequest/Group/User/AdditionalFields

You can import information into additional extended user (`xu`) fields using the data import.

#### 7.1.97 CMSCardRequest/Group/User/Actions

Contains actions to carry out for the applicant; for example, to remove or disable the user, or to cancel the user's credentials.

#### 7.1.98 CMSCardRequest/Group/User/Actions/ApplicantAction

Perform an action on the user. If you do not supply an `ApplicantAction` element, a disabled user will be re-enabled.

The possible actions are:

- `Disable` – disable the user's account.
- `Remove` – remove the user from the system.
- `CancelDevices` – Cancel all the user's credentials.
- `CancelDevice` – Cancel specific credentials. Specify the cards using the `CMSCardRequest/Group/User/Actions/Device` element.
- `CancelJob` – Cancel a specific job. Specify the job using the `CMSCardRequest/Group/User/Actions/Job` element.
- `CancelAllJobs` – Cancel all jobs for the specified user.
- `UnlockCard` – Unlock a card. Specify the card using the `CMSCardRequest/Group/User/Actions/Device` element.
- **Note:** This is not currently supported.
- `RenewCertificate` – renew a certificate. Specify the certificate using `CMSCardRequest/Group/User/Actions/CertSerialNumber` and `CMSCardRequest/Group/User/Actions/CertPolicyName`.

#### 7.1.99 CMSCardRequest/Group/User/Actions/CertSerialNumber

Used in conjunction with `CMSCardRequest/Group/User/Actions/CertPolicyName` to specify a certificate to renew.

#### 7.1.100 CMSCardRequest/Group/User/Actions/CertPolicyName

Used in conjunction with `CMSCardRequest/Group/User/Actions/CertSerialNumber` to specify a certificate to renew.

#### 7.1.101 CMSCardRequest/Group/User/Actions/StatusMappingID

The action to apply to the user. This should be an ID that matches an entry in the `StatusMappings` table. It controls how certificates are revoked.

#### 7.1.102 CMSCardRequest/Group/User/Actions/RevocationComment

A free text description that is stored against revoked certificates in the database.

#### 7.1.103 CMSCardRequest/Group/User/Actions/RevocationDelay

Used to specify a delay in hours for the certificate revocation requests.

When you create a request to cancel a device, its certificates are not canceled immediately, but are canceled after the specified number of hours.

If the credential profile is configured so that it must be validated before cancellation, the certificates are not canceled until the specified number of hours after the cancellation request is approved.

#### 7.1.104 CMSCardRequest/Group/User/Actions/Device

Specifies the card to cancel when you have selected `CancelDevice` for the `ApplicantAction`, or the card to unlock when you have selected `UnlockCard` for the `ApplicantAction`. (**Note:** `UnlockCard` is not currently supported.)

Contains at least one `DeviceIdentifier` element – you can cancel multiple cards in a single request.

#### 7.1.105 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier

Specifies the credential to be canceled or unlocked.

#### 7.1.106 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier/SerialNumber

The serial number of the credential.

#### 7.1.107 CMSCardRequest/Group/User/Actions/Device/DeviceIdentifier/SerialNumberField

The name of the field in which to look for the serial number. The field can be any field present in the `vDevices` view; for example, `SerialNumber` for the standard serial number or `HIDSerialNumber` for the HID serial number.

If you do not include a `SerialNumberField` node, MyID will use a default value of `SerialNumber`.

#### 7.1.108 CMSCardRequest/Group/User/Actions/Device/ProcessStatus

Used to specify the process status to be used for the credential being canceled.

You can use the following status codes, as listed in the `DeviceProcessStatuses` table in the database.

| Status                      | Description                                                    |
|-----------------------------|----------------------------------------------------------------|
| Active                      | Device is operational                                          |
| Assigned                    | Device is assigned to a user but has not begun personalization |
| AtBureau                    | Device is at the bureau                                        |
| Collected                   | Collected                                                      |
| Disposed                    | Disposed                                                       |
| Erased                      | Erased                                                         |
| Legacy                      | Legacy                                                         |
| Lost                        | Lost                                                           |
| None                        | None (Default the card may be re-issued)                       |
| Not Disposed                | Not Collected                                                  |
| PendingActivation           | Device is ready to be activated                                |
| PendingDeliveryConfirmation | Device has been dispatched from the bureau and is in transit   |
| PendingPersonalisation      | Device is ready to be personalized                             |
| Terminated                  | Card has been terminated                                       |
| Unassigned                  | Device is not assigned to a user                               |

You can customize your system with additional disposal statuses; for information on the configuration required, contact customer support quoting reference SUP-387.

#### 7.1.109 CMSCardRequest/Group/User/Actions/RequestedBy

Used to specify the MyID logon name of the Initiator for any jobs created by the import process. If you do not specify a value here, the Initiator is set to ImportProcessor.

You can use the **Initiator** tab in the **Job Management** workflow to search for jobs created by specific users.

#### 7.1.110 CMSCardRequest/Group/User/Actions/Job

Contains a the ID of a job to cancel. Used in conjunction with an ApplicantAction of CancelJob.

#### 7.1.111 CMSCardRequest/Group/User/Actions/Filters

The feature to filter job cancellations using criteria is now "End of Life". The `Filters` node remains in the Lifecycle API schema, but cannot be used.

See section [3.10.3, Filtering job cancellations](#) for more information.

## 7.2 CMSUserUpdate structure

The `CMSUserUpdate` schema uses the same data elements as the `CMSCardRequest` schema; see section 7.1, *CMSCardRequest structure*. This schema requires less information as a minimum, however.

The following differences exist between the `CMSUserUpdate` and `CMSCardRequest` schema:

- The `CMSUserUpdate` schema allows you to specify a `User` block without including it in a `Group` block.
- The `CMSUserUpdate` schema does not have a `CardUpdate` element.
- The `CMSCardRequest` schema allows only one group and one user, but the `CMSUserUpdate` schema allows any number of groups and users.
- If you specify a group, you must specify one or more users.

## 7.3 CMSImportResponse structure

The `CMSImportResponse` schema is used when the XML import service passes back information about the results of the user data import. It contains blocks for the `Group` and the `User`.

### 7.3.1 CMSImportResponse/Group

Contains information about the group.

### 7.3.2 CMSImportResponse/Group/Name

Internal name: `Name`

Used to identify the group.

### 7.3.3 CMSImportResponse/Group/Result

The result of the import. Can be one of the following:

- `Created`
- `Already Exists`
- `Failed`

### 7.3.4 CMSImportResponse/Group/User

Contains information about the user.

### 7.3.5 CMSImportResponse/Group/User/FirstName

Internal name: `FirstName`

The first name of the user.

### 7.3.6 CMSImportResponse/Group/User/LastName

Internal name: `Surname`

The last name of the user.

### 7.3.7 CMSImportResponse/Group/User/EmployeeID

Internal name: `EmployeeID`

The Employee ID of the user.

### 7.3.8 CMSImportResponse/Group/User/LogonName

Internal name: `LogonName`

The MyID logon name of the user.

### 7.3.9 CMSImportResponse/Group/User/CardRequest

Internal name: `Jobs.ID`

The JobID for the card request. If there is no request, returns 0.

### 7.3.10 CMSImportResponse/Group/User/CardUpdate

Internal name: `Jobs.ID`

The Job ID for the card update. If there is no update job, returns 0.

### 7.3.11 CMSImportResponse/Group/User/UnlockCardRequest

The JobID for the unlock card request. If there is no request, returns 0.

**Note:** This is not currently supported.

### 7.3.12 CMSImportResponse/Group/User/Result

The result of the import. Can be one of the following:

- Added
- Created
- Already Exists
- Failed
- Removed
- License Limit

### 7.3.13 CMSImportResponse/Group/User/Reason


Provides information about the response, including details of the reason why the request failed; for example, the name of a non-existent credential profile.

### 7.3.14 CMSImportResponse/Group/User/error

Contains XML describing any errors that occurred during the import.

## 7.4 PivCardRequest structure

This section provides information on the structure of the XML data, including information on allowed values and the MyID internal name. Use this information in conjunction with the schemas and examples.

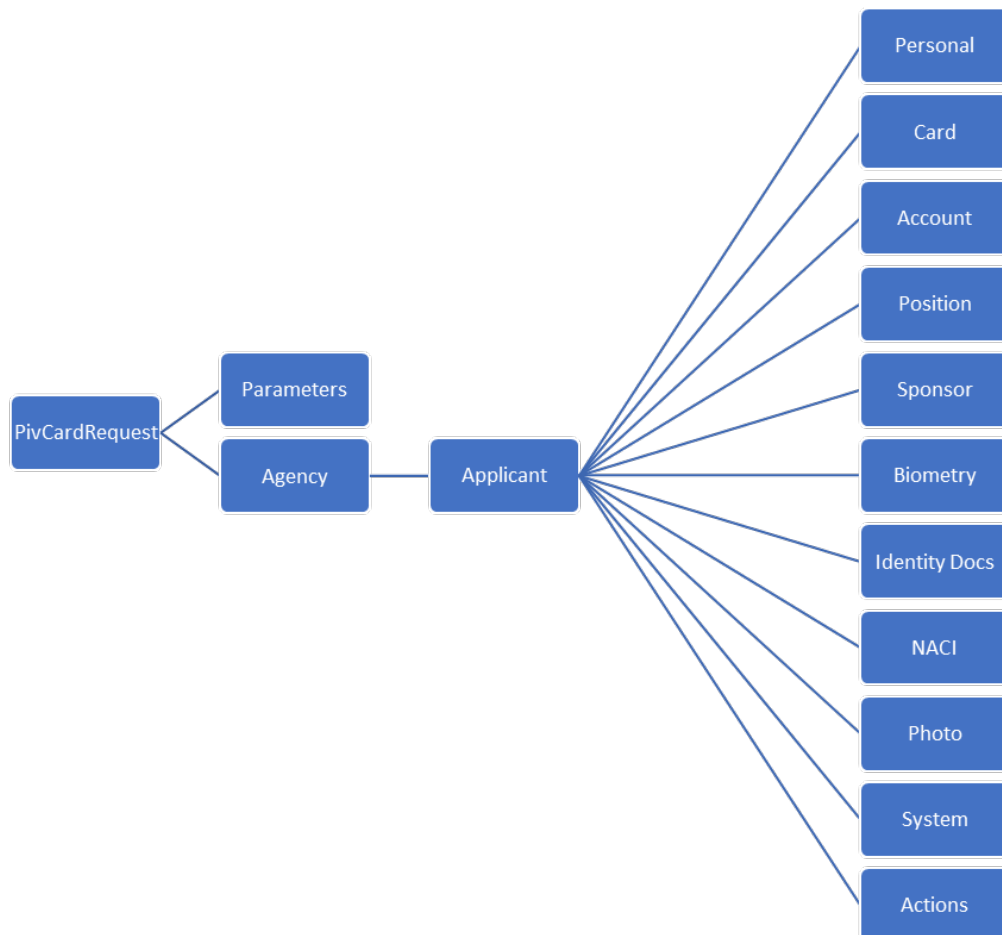

### 7.4.1 PivCardRequest/Parameters

Contains the settings for the import. See section 5, [Advanced settings](#).

### 7.4.2 PivCardRequest/Agency

The `Agency` element contains information about the applicant's agency, and contains the block for the applicant.

**Note:** An agency group created through the Lifecycle API does not inherit any default roles from its parent group, and you cannot set default roles through the Lifecycle API. This means that for any new users created within this new group, you must specify all of the roles that you want to assign; if you do not specify any roles, the user receives the default Cardholder and Password User roles.

### 7.4.3 PivCardRequest/Agency/DeptCode

Internal name: `Xg16`

Encoded in the PrintedInfo block.

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.4 PivCardRequest/Agency/AgencyCode

Internal name: Xg1

Four alphanumeric characters. Encoded in the FASCN and in the PrintedInfo block.

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.5 PivCardRequest/Agency/FacilityCode

Internal name: Xg2

Encoded in the FASCN and in the PrintedInfo block.

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.6 PivCardRequest/Agency/AgencyName

Internal name: Name and Xu3

Used to identify the Agency. Also encoded in the DN for member Applicants.

Mandatory for Add; also mandatory for update if the agency is specified.

**Note:** Agency names must be unique. The import will fail if the agency name is not unique; this occurs even if a unique parent name is specified.

#### 7.4.7 PivCardRequest/Agency/FacilityName

Not currently used.

#### 7.4.8 PivCardRequest/Agency/DUNS

Internal name: Xg5

Needed if the Organizational Category (below) is set to Commercial.

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.9 PivCardRequest/Agency/OC

Internal name: Xg3

Organizational Category. Encoded in the FASCN.

An integer – the values map to the following categories:

- 1 – Federal
- 2 – State
- 3 – Commercial
- 4 – Foreign

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.10 PivCardRequest/Agency/OI

Internal name: Xg4

Organizational Identifier. Encoded in the FASCN.

Mandatory only for Add; also mandatory for update if the agency is specified.

#### 7.4.11 PivCardRequest/Agency/Department

Internal name: Xg17 and Xu54

Encoded in the DN for member Applicants.

#### 7.4.12 PivCardRequest/Agency/BaseDN

Internal name: OrgUnit and Xg15

If present, this is used as the default DN for member Applicants. The CN field is appended to this value.

#### 7.4.13 PivCardRequest/Agency/Parent

Internal name: Parent

The name of the agency beneath which the specified agency should be positioned. For new agencies, if you do not specify a parent agency, the new agency is placed under the root. If you are specifying an existing agency for the user, make sure you specify the correct parent agency, or omit the `Parent` node; otherwise, the agency will be moved under the new parent.

**Note:** Parent agency names must be unique. The import will fail if two different agencies have the same name as the specified parent name.

#### 7.4.14 PivCardRequest/Agency/AgencyAddress

Used for delivery addresses. Contains the following elements:

| Field Name  | Internal Name |
|-------------|---------------|
| Address1    | Xg7           |
| Address2    | Xg8           |
| City        | Xg9           |
| State       | Xg10          |
| Zip         | Xg11          |
| PhoneNumber | Xg13          |
| Country     | Xg12          |
| Email       | Xg14          |
| Contact     | Xg6           |

#### 7.4.15 PivCardRequest/Agency/AdditionalAgencyFields

Contains any extended (Xg) agency fields. See section [3.8.2, Additional group fields](#) for details.

#### 7.4.16 PivCardRequest/Agency/Applicant

The Applicant element contains information about the applicant.

You can import a single applicant in each XML document.

#### 7.4.17 PivCardRequest/Agency/Applicant/Personal

Contains the personal details of the applicant.

Mandatory for Add.

- 7.4.18 PivCardRequest/Agency/Applicant/Personal/FirstName  
Internal name: `FirstName`  
Mandatory.
- 7.4.19 PivCardRequest/Agency/Applicant/Personal/LastName  
Internal name: `Surname`  
Mandatory.
- 7.4.20 PivCardRequest/Agency/Applicant/Personal/NickName  
Internal name: `Xu49`
- 7.4.21 PivCardRequest/Agency/Applicant/Personal/MiddleName  
Internal name: `Initial`
- 7.4.22 PivCardRequest/Agency/Applicant/Personal/Suffix  
Internal name: `XuPIV4`
- 7.4.23 PivCardRequest/Agency/Applicant/Personal/Title  
Internal name: `Title`
- 7.4.24 PivCardRequest/Agency/Applicant/Personal/Email  
Internal name: `Email`  
This address is used for email notifications.
- 7.4.25 PivCardRequest/Agency/Applicant/Personal/Fax  
Internal name: `PhoneExt`
- 7.4.26 PivCardRequest/Agency/Applicant/Personal/Cell  
Internal name: `MobileNumber`
- 7.4.27 PivCardRequest/Agency/Applicant/Personal/Phone  
Internal name: `PhoneNumber`
- 7.4.28 PivCardRequest/Agency/Applicant/Personal/EmployeeID  
Internal name: `EmployeeID`  
This should be a unique identifier for the applicant.  
Mandatory.  
Appears within MyID Desktop as the **Security** field. For a PIV user (that is, a user who belongs to an agency that does not have a code of 9999) this value is used for the PI (Person Identifier) value in the FASC-N. Due to restrictions on the PI field in the FASC-N, this identifier must be a maximum of 10 numeric digits.
- 7.4.29 PivCardRequest/Agency/Applicant/Personal/Address  
Used for delivery addresses. Contains the following elements:

- Address1
- Address2
- City
- StateZip

#### 7.4.30 PivCardRequest/Agency/Applicant/Personal/BirthDate

Internal name: Xu37

Format: YYYY-MM-DD

#### 7.4.31 PivCardRequest/Agency/Applicant/Personal/Nationality

Internal name: XuPIV1

A code referring to the nationality of the applicant. The possible values are:

| Code | Nationality         |
|------|---------------------|
| AFG  | Afghanistan         |
| ALA  | Aland Islands       |
| ALB  | Albania             |
| DZA  | Algeria             |
| ASM  | American Samoa      |
| AND  | Andorra             |
| AGO  | Angola              |
| AIA  | Anguilla            |
| ATA  | Antarctica          |
| ATG  | Antigua and Barbuda |
| ARG  | Argentina           |
| ARM  | Armenia             |
| ABW  | Aruba               |
| AUS  | Australia           |
| AUT  | Austria             |
| AZE  | Azerbaijan          |
| BHS  | Bahamas             |
| BHR  | Bahrain             |
| BGD  | Bangladesh          |
| BRB  | Barbados            |
| BLR  | Belarus             |
| BEL  | Belgium             |
| BLZ  | Belize              |
| BEN  | Benin               |
| BMU  | Bermuda             |
| BTN  | Bhutan              |

| Code | Nationality                       |
|------|-----------------------------------|
| BOL  | Bolivia                           |
| BIH  | Bosnia and Herzegovina            |
| BWA  | Botswana                          |
| BVT  | Bouvet Island                     |
| BRA  | Brazil                            |
| IOT  | British Indian Ocean Territory    |
| BRN  | Brunei Darussalam                 |
| BGR  | Bulgaria                          |
| BFA  | Burkina Faso                      |
| BDI  | Burundi                           |
| KHM  | Cambodia                          |
| CMR  | Cameroon                          |
| CAN  | Canada                            |
| CPV  | Cape Verde                        |
| CYM  | Cayman Islands                    |
| CAF  | Central African Republic          |
| TCD  | Chad                              |
| CHL  | Chile                             |
| CHN  | China                             |
| CXR  | Christmas Island                  |
| CCK  | Cocos (Keeling) Islands           |
| COL  | Colombia                          |
| COM  | Comoros                           |
| COG  | Congo                             |
| COD  | Congo, Democratic Republic of the |
| COK  | Cook Islands                      |
| CRI  | Costa Rica                        |
| CIV  | Cote d'Ivoire                     |
| HRV  | Croatia                           |
| CUB  | Cuba                              |
| CYP  | Cyprus                            |
| CZE  | Czech Republic                    |
| DNK  | Denmark                           |
| DJI  | Djibouti                          |
| DMA  | Dominica                          |
| DOM  | Dominican Republic                |
| ECU  | Ecuador                           |

| Code | Nationality                       |
|------|-----------------------------------|
| EGY  | Egypt                             |
| SLV  | El Salvador                       |
| GNQ  | Equatorial Guinea                 |
| ERI  | Eritrea                           |
| EST  | Estonia                           |
| ETH  | Ethiopia                          |
| FLK  | Falkland Islands (Malvinas)       |
| FRO  | Faroe Islands                     |
| FJI  | Fiji                              |
| FIN  | Finland                           |
| FRA  | France                            |
| GUF  | French Guiana                     |
| PYF  | French Polynesia                  |
| ATF  | French Southern Territories       |
| GAB  | Gabon                             |
| GMB  | Gambia                            |
| GEO  | Georgia                           |
| DEU  | Germany                           |
| GHA  | Ghana                             |
| GIB  | Gibraltar                         |
| GRC  | Greece                            |
| GRL  | Greenland                         |
| GRD  | Grenada                           |
| GLP  | Guadeloupe[2]                     |
| GUM  | Guam                              |
| GTM  | Guatemala                         |
| GGY  | Guernsey                          |
| GIN  | Guinea                            |
| GNB  | Guinea-Bissau                     |
| GUY  | Guyana                            |
| HTI  | Haiti                             |
| HMD  | Heard Island and McDonald Islands |
| VAT  | Holy See (Vatican City State)     |
| HND  | Honduras                          |
| HKG  | Hong Kong                         |
| HUN  | Hungary                           |
| ISL  | Iceland                           |

| Code | Nationality                                |
|------|--------------------------------------------|
| IND  | India                                      |
| IDN  | Indonesia                                  |
| IRN  | Iran, Islamic Republic of                  |
| IRQ  | Iraq                                       |
| IRL  | Ireland                                    |
| IMN  | Isle of Man                                |
| ISR  | Israel                                     |
| ITA  | Italy                                      |
| JAM  | Jamaica                                    |
| JPN  | Japan                                      |
| JEY  | Jersey                                     |
| JOR  | Jordan                                     |
| KAZ  | Kazakhstan                                 |
| KEN  | Kenya                                      |
| KIR  | Kiribati                                   |
| PRK  | Korea, Democratic People's Republic of     |
| KOR  | Korea, Republic of                         |
| KWT  | Kuwait                                     |
| KGZ  | Kyrgyzstan                                 |
| LAO  | Lao People's Democratic Republic           |
| LVA  | Latvia                                     |
| LBN  | Lebanon                                    |
| LSO  | Lesotho                                    |
| LBR  | Liberia                                    |
| LBY  | Libyan Arab Jamahiriya                     |
| LIE  | Liechtenstein                              |
| LTU  | Lithuania                                  |
| LUX  | Luxembourg                                 |
| MAC  | Macao                                      |
| MKD  | Macedonia, the former Yugoslav Republic of |
| MDG  | Madagascar                                 |
| MWI  | Malawi                                     |
| MYS  | Malaysia                                   |
| MDV  | Maldives                                   |
| MLI  | Mali                                       |
| MLT  | Malta                                      |
| MHL  | Marshall Islands                           |

| Code | Nationality                     |
|------|---------------------------------|
| MTQ  | Martinique                      |
| MRT  | Mauritania                      |
| MUS  | Mauritius                       |
| MYT  | Mayotte                         |
| MEX  | Mexico                          |
| FSM  | Micronesia, Federated States of |
| MDA  | Moldova, Republic of            |
| MCO  | Monaco                          |
| MNG  | Mongolia                        |
| MNE  | Montenegro                      |
| MSR  | Montserrat                      |
| MAR  | Morocco                         |
| MOZ  | Mozambique                      |
| MMR  | Myanmar                         |
| NAM  | Namibia                         |
| NRU  | Nauru                           |
| NPL  | Nepal                           |
| NLD  | Netherlands                     |
| ANT  | Netherlands Antilles            |
| NCL  | New Caledonia                   |
| NZL  | New Zealand                     |
| NIC  | Nicaragua                       |
| NER  | Niger                           |
| NGA  | Nigeria                         |
| NIU  | Niue                            |
| NFK  | Norfolk Island                  |
| MNP  | Northern Mariana Islands        |
| NOR  | Norway                          |
| OMN  | Oman                            |
| PAK  | Pakistan                        |
| PLW  | Palau                           |
| PSE  | Palestinian Territory, Occupied |
| PAN  | Panama                          |
| PNG  | Papua New Guinea                |
| PRY  | Paraguay                        |
| PER  | Peru                            |
| PHL  | Philippines                     |

| Code | Nationality                                  |
|------|----------------------------------------------|
| PCN  | Pitcairn                                     |
| POL  | Poland                                       |
| PRT  | Portugal                                     |
| PRI  | Puerto Rico                                  |
| QAT  | Qatar                                        |
| REU  | Reunion                                      |
| ROU  | Romania                                      |
| RUS  | Russian Federation                           |
| RWA  | Rwanda                                       |
| SHN  | Saint Helena                                 |
| KNA  | Saint Kitts and Nevis                        |
| LCA  | Saint Lucia                                  |
| SPM  | Saint Pierre and Miquelon                    |
| VCT  | Saint Vincent and the Grenadines             |
| WSM  | Samoa                                        |
| SMR  | San Marino                                   |
| STP  | Sao Tome and Principe                        |
| SAU  | Saudi Arabia                                 |
| SEN  | Senegal                                      |
| SRB  | Serbia                                       |
| SYC  | Seychelles                                   |
| SLE  | Sierra Leone                                 |
| SGP  | Singapore                                    |
| SVK  | Slovakia                                     |
| SVN  | Slovenia                                     |
| SLB  | Solomon Islands                              |
| SOM  | Somalia                                      |
| ZAF  | South Africa                                 |
| SGS  | South Georgia and the South Sandwich Islands |
| ESP  | Spain                                        |
| LKA  | Sri Lanka                                    |
| SDN  | Sudan                                        |
| SUR  | Suriname                                     |
| SJM  | Svalbard and Jan Mayen                       |
| SWZ  | Swaziland                                    |
| SWE  | Sweden                                       |
| CHE  | Switzerland                                  |

| Code | Nationality                          |
|------|--------------------------------------|
| SYR  | Syrian Arab Republic                 |
| TWN  | Taiwan, Province of China            |
| TJK  | Tajikistan                           |
| TZA  | Tanzania, United Republic of         |
| THA  | Thailand                             |
| TLS  | Timor-Leste                          |
| TGO  | Togo                                 |
| TKL  | Tokelau                              |
| TON  | Tonga                                |
| TTO  | Trinidad and Tobago                  |
| TUN  | Tunisia                              |
| TUR  | Turkey                               |
| TKM  | Turkmenistan                         |
| TCA  | Turks and Caicos Islands             |
| TUV  | Tuvalu                               |
| UGA  | Uganda                               |
| UKR  | Ukraine                              |
| ARE  | United Arab Emirates                 |
| GBR  | United Kingdom                       |
| USA  | United States                        |
| UMI  | United States Minor Outlying Islands |
| URY  | Uruguay                              |
| UZB  | Uzbekistan                           |
| VUT  | Vanuatu                              |
| VEN  | Venezuela                            |
| VNM  | Viet Nam                             |
| VGB  | Virgin Islands, British              |
| VIR  | Virgin Islands, U.S.                 |
| WLF  | Wallis and Futuna                    |
| ESH  | Western Sahara                       |
| YEM  | Yemen                                |
| ZMB  | Zambia                               |
| ZWE  | Zimbabwe                             |

#### 7.4.32 PivCardRequest/Agency/Applicant/Personal/Citizenship

Reserved for future use. Do not use.

#### 7.4.33 PivCardRequest/Agency/Applicant/Personal/CountryOfBirth

Internal name: XuPIV12.

Used for OPM Adjudication – contact customer support for more information, quoting reference SUP-123.

A two-character NCIC country code specifying the country of birth of the applicant. If the country is the United States of America, use the `PlaceOfBirth` node to specify the state.

#### 7.4.34 PivCardRequest/Agency/Applicant/Personal/PlaceOfBirth

Reserved for future use.

#### 7.4.35 PivCardRequest/Agency/Applicant/Personal/ExportRestrictions

Reserved for future use. Do not use.

#### 7.4.36 PivCardRequest/Agency/Applicant/Authentication

Contains information about the security phrases for a user.

#### 7.4.37 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase

Contains a pair of elements – a `Prompt` and an `Answer` – that provide a security phrase for the applicant.

You can have up to five `SecurityPhrase` elements, each containing a `Prompt` and `Answer` pair.

**Note:** If you provide any security phrases for an existing user, *all* existing security phrases on that user's account are removed and replaced with the newly-provided security phrases. You can use this feature to delete the security phrases from a user's account – provide a single `Prompt` with an empty `Answer`, and the user's security phrases will be removed. (If the minimum number of security phrases is set to 1, the user will still be prompted for a security phrase when attempting to log on, but will be unable to authenticate.)

#### 7.4.38 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase/Prompt

Internal name: `Question` field in `SecurityQuestions`

Used to import a security question. If the question does not already exist, an entry is added to the `SecurityQuestions` table; this question will subsequently be available for use when setting security phrases in MyID.

The default security questions are:

| ID | Question                 |
|----|--------------------------|
| 1  | Password                 |
| 2  | Mothers maiden name?     |
| 3  | N.I number?              |
| 4  | Favourite food?          |
| 5  | Car registration number? |
| 6  | Name of pet              |
| 7  | First school attended    |
| 8  | An old phone number      |
| 9  | A memorable date         |
| 10 | A memorable place        |

| ID | Question          |
|----|-------------------|
| 11 | A memorable event |
| 12 | A famous person   |
| 13 | Place of birth    |
| 14 | A country         |
| 15 | A river           |
| 16 | A movie           |
| 17 | A song            |
| 18 | A book            |
| 19 | A sport           |
| 20 | A postcode        |
| 21 | An animal         |
| 22 | First car type    |

#### 7.4.39 PivCardRequest/Agency/Applicant/Authentication/SecurityPhrase/Answer

Internal name: `SecurityPhrase` field in `UsersSecurityQuestions`

Used to import an answer to a security question for an applicant. A hash of the answer is stored in the `UsersSecurityQuestions` table.

**Important:** Do not include any leading or trailing spaces in the security phrase answer. If you do include leading or trailing spaces, the user will be unable to authenticate to MyID.

**Note:** If you have set up the **Security Phrase Complexity** option within MyID to determine the complexity of security phrases, this is not enforced on any passwords that you import using the Lifecycle API.

You can encrypt the answer using a transport key – this allows you to maintain the security of the security phrase answer when you include it in the XML data.

To encrypt the answer:

1. Import your AES128 transport key into MyID using the **Key Manager** workflow.
2. External to MyID, encrypt the security phrase answer with the following settings:
  - Encode the security phrase answer as little-endian Unicode. Do not use a byte order mark.  
For example, a security phrase of `answer` would be encoded as:  
`0061006E0073007700650072`
  - Pad the data using ISO9797 Method 2 (pad with a single 0x80, then 0x00 until the block-length is reached).
  - Encrypt using CBC or ECB mode encryption.
3. Add the hex-encoded encrypted data to the `Answer` node.
4. Set the `KeyName` attribute of the `Answer` node to the name of the transport key you imported into MyID.
5. Set the `Mode` attribute of the `Answer` node to either `CBC` or `ECB`, depending on how you encrypted the answer.

For example:

- The transport key, `MyTransportKey`, has a value of:

```
206890FC9B4EA1D0137D8C692B3BFCB6
```

- The security phrase is:

```
answer
```

- In the import, use the following:

```
<Answer KeyName="MyTransportKey"
Mode="CBC">6713987B589F76BC4DA0F557D79A6275</Answer>
```

If you do not want to encrypt the answer in the XML document, omit the `KeyName` and `Mode` attributes. For example:

```
<Answer>plaintextanswer1234</Answer>
```

#### 7.4.40 PivCardRequest/Agency/Applicant/Card

Used to specify details for the applicant's card.

#### 7.4.41 PivCardRequest/Agency/Applicant/Card/CardProfile

If present, this will request a card of the given name for this applicant. If performing an update, or the card profile does not exist, no request will be made.

#### 7.4.42 PivCardRequest/Agency/Applicant/Card/CardExpiryDate

Used to specify the expiry date for the card when it is issued. The card will expire on the date specified, or on the date the card profile specifies, whichever is earlier.

The format is `YYYY-MM-DD` – for example, `2016-12-25`.

**Note:** If the **Expire Cards at End of Day** configuration option is set to Yes, the time portion of the card expiry date is set to 23:59 UTC – the end of the day. If the **Expire Cards at End of Day** option is set to No, the time portion is set to the time of the import. However, if the **Expire Cards at End of Day** option is set to No, *and* the card expiry date is constrained by an earlier card lifetime as configured in the credential profile, the time portion is set to 00:00 UTC – the start of the day.

**Note:** Some CAs do not allow control over the time portion of the certificate expiry. When MyID sets the lifetime of the certificate, the date is set as expected, but the time may not match exactly, depending on the certificate authority being used.

If you provide a date in the `CardExpiryDate` node, and this exceeds the **Maximum Expiry Date** set against the user account, the `CardExpiryDate` is ignored, and the **Maximum Expiry Date** is used in the request. This may be changed at the time of collection to an earlier date, if the lifetime configured in the credential profile limits it.

#### 7.4.43 PivCardRequest/Agency/Applicant/Card/Renewal

Used to specify whether the card is a renewal of an existing card. If the user already exists, you must set this option to `true` or card request jobs will not be created.

Can be one of the following values:

- `true` – this is a card renewal.
- `false` – this is not a card renewal.

**Note:** For card renewals, you must specify the card's original serial number and device type using the `PivCardRequest/Agency/Applicant/Card/Update` node.

#### 7.4.44 `PivCardRequest/Group/User/Card/ImportCard`

Used to specify whether to import a device (see section 3.11, *Importing operator credentials*).

Can be one of the following values:

- `true` – import a device.
- `false` – do not import a device.

#### 7.4.45 `PivCardRequest/Agency/Applicant/Card/CardRequestedBy`

This is the logon name of the person requesting the card. Used for auditing purposes.

#### 7.4.46 `PivCardRequest/Agency/Applicant/Card/JobLabel`

Allows you to specify a label for the renewal or replacement job. You can then search for this label in the **Job Management** or **Batch Issue Card** workflows.

#### 7.4.47 `PivCardRequest/Agency/Applicant/Card/Update`

Used to specify the card being updated or renewed. You must make sure that the card is issued to the user.

#### 7.4.48 `PivCardRequest/Agency/Applicant/Card/Update/OriginalSerialNumber`

The serial number of the card being updated or renewed. Used to target a specific card.

Mandatory if you have included the `Update` node.

#### 7.4.49 `PivCardRequest/Agency/Applicant/Card/Update/OriginalDeviceType`

The device type of the card being updated or renewed.

Mandatory if you have included the `Update` node.

#### 7.4.50 `PivCardRequest/Agency/Applicant/Card/Update/StatusMapping`

The status mapping code to be used when the card is updated.

See section 3.7.5, *Status mapping codes* for details.

#### 7.4.51 `PivCardRequest/Agency/Applicant/Card/Update/RevocationComment`

A free text description that is stored in the database against certificates revoked by this update. Used in conjunction with the `ReIssue` option in `ParametersXML`.

#### 7.4.52 `PivCardRequest/Agency/Applicant/Card/Update/ParametersXML`

Contains parameters for the card update job.

#### 7.4.53 `PivCardRequest/Agency/Applicant/Card/Update/ParametersXML/ReIssue`

Set to `1` to request the reissuance of a device.

Reissuance is a type of card update job that, when collected, carries out the following:

- Revokes existing certificates present on the device.
- Re-applies data model electronic personalization.

- Issues and writes a new set of certificates onto the device (according to the credential profile).
- If the **Rotate Keys On Card Update** configuration option is set (on the **Issuance Processes** page of the **Operation Settings** workflow) applies the latest customer GlobalPlatform and PIV 9B keys.

#### 7.4.54 PivCardRequest/Agency/Applicant/Card/Replacement

Allows you to provide the details of the credential being replaced.

#### 7.4.55 PivCardRequest/Agency/Applicant/Card/Replacement/OriginalSerialNumber

The serial number of the card being replaced. Mandatory if you specify the `Replacement` node.

#### 7.4.56 PivCardRequest/Agency/Applicant/Card/Replacement/OriginalDeviceType

The device type of the card being replaced. Mandatory if you specify the `Replacement` node.

**Note:** If you specify a valid serial number and device type for the card being replaced (that is, an existing credential that is currently assigned to the applicant) the original card is marked for cancellation and a new card request is created.

If the serial number is invalid (for example, the card does not exist, or is not assigned to any user) no card is marked for cancellation, but the replacement card is still requested.

If the serial number is valid but is assigned to another user, an error is generated; the card is not cancelled, and no replacement card is requested.

#### 7.4.57 PivCardRequest/Agency/Applicant/Card/Replacement/StatusMapping

The status mapping ID for the replacement.

See section [3.7.5, Status mapping codes](#) for details.

#### 7.4.58 PivCardRequest/Agency/Applicant/Card/Reprovision

Set the value of this node to `1` to request a reprovision rather than an update.

A reprovision allows you to re-encode a card completely, based on the data in the MyID database, using the latest version of the credential profile used during issuance.

The card will have the same expiry date as the original card. New certificates may have longer expiration times than the original certificates, but these will not exceed the lifetime of the card itself. Certificates that were revoked externally to MyID will be replaced with new active certificates.

When requesting a reprovision, specify a status mapping with one of the following values:

- `83` – User details have changed.
- `84` – There is a problem with the device.
- `85` – New credential profile needs to be applied.

**Note:** If you specify any other status mapping, it is ignored – only these status mappings carry out reprovisions.

For example:

```
<Card>
  <CardProfile>Yubikey NoOTP</CardProfile>
  <CardRequestedBy>System</CardRequestedBy>
  <Update>
    <OriginalSerialNumber>8115516</OriginalSerialNumber>
    <OriginalDeviceType>YubiKey 4</OriginalDeviceType>
    <StatusMapping>84</StatusMapping>
  </Update>
  <Reprovision>1</Reprovision>
</Card>
```

#### 7.4.59 PivCardRequest/Agency/Applicant/Card/CardLayout

Optionally, contains the name of the card layout to use when printing the requested card.

The card layout name must be valid for the card's credential profile at the point that the card is issued; if the card layout name is not valid, the request will not be processed.

#### 7.4.60 PivCardRequest/Agency/Applicant/Card/SerialNumber

Used in conjunction with the PivCardRequest/Agency/Applicant/Card/DeviceType node to specify an exact card to be issued.

**Note:** If you have the **Only Issue to Known Serial Numbers** option set in the credential profile, and you specify a serial number for the card that has not previously been added to MyID, the import will fail. This failure will be included in the audit.

#### 7.4.61 PivCardRequest/Agency/Applicant/Card/DeviceType

Used in conjunction with the PivCardRequest/Agency/Applicant/Card/SerialNumber node to specify an exact card to be issued.

#### 7.4.62 PivCardRequest/Group/User/Card/Container

Used in conjunction with the CMSCardRequest/Group/User/Card/ImportCard node to specify the container that the authentication certificate is located in.

See section [3.11](#), *Importing operator credentials*.

#### 7.4.63 PivCardRequest/Group/User/Card/Certificate

Used in conjunction with the CMSCardRequest/Group/User/Card/ImportCard node to specify the authentication certificate on the imported card. This must be the base64 representation of the certificate without headers, footers, or line breaks.

See section [3.11](#), *Importing operator credentials*.

#### 7.4.64 PivCardRequest/Agency/Applicant/Account

Contains details of the applicant's account.

#### 7.4.65 PivCardRequest/Agency/Applicant/Account/DN

Internal name: DistinguishedName

The DN of the users account in the LDAP

#### 7.4.66 PivCardRequest/Agency/Applicant/Account/AlternateDN

Internal name: Xu55

If populated this is used in preference to the DN for cert requests

#### 7.4.67 PivCardRequest/Agency/Applicant/Account/CN

Internal name: `CommonName`

#### 7.4.68 PivCardRequest/Agency/Applicant/Account/OU

Internal name: `OrganisationalUnit`

#### 7.4.69 PivCardRequest/Agency/Applicant/Account/UPN

Internal name: `UserPrincipalName`

#### 7.4.70 PivCardRequest/Agency/Applicant/Account/SAMAccountName

Internal name: `SAMAccountName`

Optional `SAMAccountName` value for the user. Maximum of 20 characters.

#### 7.4.71 PivCardRequest/Agency/Applicant/Account/Domain

Internal name: `Domain`

Optional `Domain` value for the user. Maximum of 50 characters.

#### 7.4.72 PivCardRequest/Agency/Applicant/Account/LogonName

Internal name: `LogonName`

User's name, used to log into MyID. Must be unique.

If no value is supplied, the `PivCardRequest/Agency/Applicant/Personal/EmployeeID` value is used instead.

#### 7.4.73 PivCardRequest/Agency/Applicant/Account/Roles

Contains the details of the role you want to assign to the applicant.

**Note:** You can set any role for a user using the Lifecycle API – the roles you specify override any role restrictions. Also, the user will not receive any default roles that have been set up for their group; if you want to assign roles, you must include them explicitly. If you do *not* specify any roles, the user receives the default Cardholder and Password User roles.

#### 7.4.74 PivCardRequest/Agency/Applicant/Account/Roles/Role

Contains details of the role you want to assign the applicant. Contains the following elements:

| Field Name     | Internal Name  | Description                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name           | UserProfile    | The name of the role that the applicant is to have. You must specify a role for the applicant.                                                                                                                                                                                                                                                                                                |
| Scope          | Scope          | <p>The scope of the role that the applicant is to have. The value must be one of the following:</p> <p>None</p> <p>Self</p> <p>Department</p> <p>Division</p> <p>All</p> <p><b>Note:</b> If you want to remove an existing role from a user's account, set the <code>Scope</code> to <code>None</code>, and the <code>RolesActionOnDuplicate</code> parameter to <code>MergeEmpty</code>.</p> |
| LogonMechanism | LogonMechanism | Not supported. Do not use.                                                                                                                                                                                                                                                                                                                                                                    |

#### 7.4.75 PivCardRequest/Agency/Applicant/Account/EntrustProfile

Specifies an Entrust profile template to use for the applicant. If specified, the applicant is added to Entrust using the template. See section [3.9, Importing users into Entrust](#) for details.

#### 7.4.76 PivCardRequest/Agency/Applicant/Account/MaxRequestExpiryDate

Allows you to set the maximum credential expiry date for a person – this allows you to specify the latest expiry date for any device issued to this person. Note that card requests cannot exceed the **Lifetime** set in the credential profile. Also, the credential profile can override the maximum expiry date for a person using the **Ignore User Expiry Date** option.

If the **Expire Cards at End of Day** configuration option is set to Yes, the time portion of the user's maximum credential expiry date is set to 23:59 UTC – the end of the day. If the **Expire Cards at End of Day** option is set to No, the time portion is set to 00:00 UTC – the start of the day.

**Note:** Some CAs do not allow control over the time portion of the certificate expiry. When MyID sets the lifetime of the certificate, the date is set as expected, but the time may not match exactly, depending on the certificate authority being used.

If you supply an expiry date in the `CardExpiryDate` node, it may also cause a check to be performed even when Max Request Expiry Date is not set in the same transaction using the Lifecycle API. See section [7.4.42, PivCardRequest/Agency/Applicant/Card/CardExpiryDate](#).

This setting affects all future device requests. It does not affect any issued devices or existing requests.

**Note:** This setting affects device requests made through the MyID Operator Client or the Lifecycle API. Requests made through MyID Desktop do not take this setting into account.

See the *Requesting a device for a person* section in the [MyID Operator Client](#) guide for more information.

#### 7.4.77 PivCardRequest/Agency/Applicant/Account/UserSID

Allows you to provide the user security identifier (user SID) for a person.

For information on user SIDs, see the *Including user security identifiers in certificates* section in the [Administration Guide](#).

#### 7.4.78 PivCardRequest/Agency/Applicant/Position

Contains information about the applicant's position within the agency.

#### 7.4.79 PivCardRequest/Agency/Applicant/Position/EmployeeAssociation

Internal name: Xu4 and Xu5

If "Contractor" this is appended to the Applicant's DN. The numeric version stored in Xu4.

**Note:** This node *must* be populated with a valid lookup value for new user imports.

The value can be one of the following:

- Employee
- Civil Worker
- Executive
- Uniformed
- Contractor
- Affiliate
- Beneficiary

#### 7.4.80 PivCardRequest/Agency/Applicant/Position/EmployeeAffiliation

Internal name: Xu53

Used for graphical personalization of the card.

#### 7.4.81 PivCardRequest/Agency/Applicant/Position/Rank

Internal name: Xu1

Used for graphical personalization of the card.

The value is restricted to a list of codes (for example, E-1 or O-6). See the schema for a full list.

#### 7.4.82 PivCardRequest/Agency/Applicant/Position/EmergencyRole

Internal name: Xu8

Can be used to allow additional card profiles to Emergency Responders.

Can be one of the following values:

- Law Enforcement
- Paramedic
- Doctor
- Firefighter
- Bomb Disposal

- Biohazard
- None

#### 7.4.83 PivCardRequest/Agency/Applicant/Position/Privilege

Internal name: Xu30

These details are visible in **View Person** and during card issuance approval.

#### 7.4.84 PivCardRequest/Agency/Applicant/Position/ApplicantPosition

Internal name: Xu11

These details are visible in **View Person** and during card issuance approval.

#### 7.4.85 PivCardRequest/Agency/Applicant/Position/ExtraInfo

Internal name: Xu10

A free-text field to leave comments about an applicant.

#### 7.4.86 PivCardRequest/Agency/Applicant/Sponsor

Contains information about the applicant's sponsor. These details are visible in **View Person** and during card issuance approval.

#### 7.4.87 PivCardRequest/Agency/Applicant/Sponsor/SponsorName

Internal name: Xu31

#### 7.4.88 PivCardRequest/Agency/Applicant/Sponsor/SponsorPosition

Internal name: Xu32

#### 7.4.89 PivCardRequest/Agency/Applicant/Sponsor/SponsorAgency

Internal name: Xu34

#### 7.4.90 PivCardRequest/Agency/Applicant/Sponsor/SponsorEmail

Internal name: Xu36

#### 7.4.91 PivCardRequest/Agency/Applicant/Sponsor/SponsorPhoneNumber

Internal name: Xu35

#### 7.4.92 PivCardRequest/Agency/Applicant/Biometry

Contains information about the applicant's biometric details. Some of these details are printed on the reverse of some card layouts. Also included in adjudication requests.

#### 7.4.93 PivCardRequest/Agency/Applicant/Biometry/HeightInches

Internal name: Xu14

The applicant's height in inches.

**Note:** This must be numeric. For example, 73 is accepted; 73" or 6'1" or 6 foot 1 inch are not allowed.

#### 7.4.94 PivCardRequest/Agency/Applicant/Biometry/WeightLbs

Internal name: Xu15

The applicant's weight in pounds.

**Note:** The schema allows a total of eight characters for this value; however, this includes the space and `lbs` that is appended during the import. Accordingly there are four characters available for the numeric part of the weight; for example, `9999`, which becomes `9999 lbs` when it is imported into MyID. Do not include the `lbs` in the import data. `140` is accepted; `140 lbs` or `10 stone` are not allowed.

#### 7.4.95 PivCardRequest/Agency/Applicant/Biometry/Gender

Internal name: `Xu38`

#### 7.4.96 PivCardRequest/Agency/Applicant/Biometry/EyeColor

Internal name: `Xu13`

The value of this element is restricted. See the schema for details.

#### 7.4.97 PivCardRequest/Agency/Applicant/Biometry/HairColor

Internal name: `Xu12`

The value of this element is restricted. The current list is:

| Code | Description            |
|------|------------------------|
| XXX  | Unspecified or unknown |
| BAL  | Bald                   |
| BLK  | Black                  |
| BLN  | Blonde or Strawberry   |
| BLU  | Blue                   |
| BRO  | Brown                  |
| GRY  | Gray or Partially Gray |
| GRN  | Green                  |
| ONG  | Orange                 |
| PNK  | Pink                   |
| PLE  | Purple                 |
| RED  | Red or Auburn          |
| SDY  | Sandy                  |
| STR  | Streaked               |
| WHI  | White                  |

#### 7.4.98 PivCardRequest/Agency/Applicant/Biometry/Race

Internal name: `Xu39`

The value of this element is restricted. See the schema for details.

#### 7.4.99 PivCardRequest/Agency/Applicant/Biometry/BioSample

Contains elements to contain fingerprints, EFT data and facial biometric scans.

The possible elements are:

- `R_Little` – the right little finger. Uses the data type `BioFingerSample`.
- `R_Ring` – the right ring finger. Uses the data type `BioFingerSample`.
- `R_Middle` – the right middle finger. Uses the data type `BioFingerSample`.
- `R_Index` – the right index finger. Uses the data type `BioFingerSample`.
- `R_Thumb` – the right thumb. Uses the data type `BioFingerSample`.
- `L_Little` – the left little finger. Uses the data type `BioFingerSample`.
- `L_Ring` – the left ring finger. Uses the data type `BioFingerSample`.
- `L_Middle` – the left middle finger. Uses the data type `BioFingerSample`.
- `L_Index` – the left index finger. Uses the data type `BioFingerSample`.
- `L_Thumb` – the left thumb. Uses the data type `BioFingerSample`.
- `EFT` – the applicant's EFT sample. Uses the data type `EncodedData` with an encoding type of `bmp`. As this is a standard format, the encoding type is actually ignored.
- `FaceScan` – the applicant's facial biometric sample. Uses the data type `EncodedData` with an encoding type of 385.
- `IrisScan` – the applicant's iris sample. Uses the data type `EncodedData` with an encoding type of 19794.

**Important:** If you include a biometrics node (for example, `FaceScan`) you *must* provide full and correct data for the biometrics. Do not leave the node empty – if you provide an empty node, the MyID client will not display the correct default image, but will display a broken image icon instead.

#### 7.4.99.1 BioFingerSample

The `BioFingerSample` block is used to provide the data for a single fingerprint. It contains either:

- An `EncodedData` block (see below), with the `Encoding` type of 378 and a `Data` block of base64 data.  
**Note:** The `RolledPrint` element visible in the schema is no longer supported.
- or:
- A `ReasonMissing` element, which can be either `Unprintable` or `Amputated`, if you cannot provide the data for the specified finger.

For example (the Base 64-encoded binary data has been truncated):

```
<BioSample>
  <R_Index>
    <Encoding>378</Encoding>
    <Data>Rk1SACAy...</Data>
  </R_Index>
  <L_Index>
    <ReasonMissing>Unprintable</ReasonMissing>
  </L_Index>
  ...
</BioSample>
```

### 7.4.99.2 EncodedData

`EncodedData` blocks are used to include binary data in the imported XML; for example, fingerprint data, facial biometrics, and scanned documents. The `EncodedData` block has the following elements:

- `Encoding` – the type of data encoded in the block. This can be one of the following:
  - `jpg` – JPG image data.
  - `gif` – GIF image data.
  - `png` – PNG image data.
  - `bmp` – Windows bitmap image data.
  - `378` – INCITS 378 fingerprint data.
  - `385` – facial biometrics in ANSI/INCITS 385-2004 format.
  - `19794` – iris data.
- `Data` – a string of base64-encoded data containing the file to be uploaded.
- `DateTaken` – the date of the data; for example, when the photograph was taken, or when the fingerprints were captured.

For user photos only, this is added to the XML within the `ImageProps` field in the `People` table in the MyID database.

yyyy-mm-ddThh:mm:ss.nnn

For example:

2010-01-02T14:23:54.123

**Note:** This is important for FIPS 201-2, as it lays down requirements for the maximum age of captured biometrics at the point of card issuance.

- `Source` – For user photos only, this is added to the XML within the `ImageProps` field in the `People` table. You can optionally use this field to store information about where the user photo came from.

### 7.4.99.3 Removing and updating fingerprints

You can update the fingerprints for applicants by supplying new fingerprint data. Updated fingerprint data for the specified fingers overwrites the previously-recorded fingerprints. If you are using different fingers (for example, if the applicant has had their right index finger amputated) you can remove the existing fingerprints for specific fingers by including an empty `Data` node.

For example:

```
<BioSample>
  <R_Index>
    <Encoding>378</Encoding>
    <Data/>
  </R_Index>
</BioSample>
```

Alternatively, you can use the `ReasonMissing` element to remove existing fingerprints:

```
<BioSample>
  <R_Index>
    <ReasonMissing>Amputated</ReasonMissing>
  </R_Index>
</BioSample>
```

All changes to the fingerprints stored for applicants are recorded in the audit trail.

#### 7.4.100 PivCardRequest/Agency/Applicant/Biometry/Signature

Contains the applicant's digitized signature. Uses type `EncodedData` with an `Encoding` type of `jpg`. See section 7.4.99.2, [EncodedData](#) for details of the `EncodedData` format.

#### 7.4.101 PivCardRequest/Agency/Applicant/IdentityDocs

Contains scans and information about the applicant's identity documents.

The following elements are included, one for each document:

- `IdentityDoc1`
- `IdentityDoc2`
- `SPF10`

Each document contains the following elements:

| Field Name | Internal Name | Description                                                                                                                                                                                                                          | Allowed Values                                                                                                                                                                                                                                                            |
|------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image      |               | Contains the scanned document. Uses an <code>EncodedData</code> block with an <code>Encoding</code> type of <code>jpg</code> . See section 7.4.99.2, <a href="#">EncodedData</a> for details of the <code>EncodedData</code> format. |                                                                                                                                                                                                                                                                           |
| Title      | Xu21<br>Xu26  | The type of the identity document                                                                                                                                                                                                    | Restricted for <code>IdentityDoc1</code> and <code>IdentityDoc2</code> – see the schema for a list of supported documents. <code>IDDocName1</code> is the list for the first identity document, and <code>IDDocName2</code> is the list for the second identity document. |
| IssuedBy   | Xu22<br>Xu27  | The authority that issue the document                                                                                                                                                                                                |                                                                                                                                                                                                                                                                           |
| Number     | Xu23<br>Xu28  | A unique identifier for the document                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                           |
| Expiry     | Xu24<br>Xu29  | The expiry date for the document                                                                                                                                                                                                     | YYYY-MM-DD                                                                                                                                                                                                                                                                |

#### 7.4.102 PivCardRequest/Agency/Applicant/NACI

Contains information about the applicant's NACI checks. The NACI checks are visible in the **View Person** workflow.

For example:

```
<NACI>
  <NACCaseNumber>65522</NACCaseNumber>
  <NACICaseNumber>65522</NACICaseNumber>
  <Check>
    <Type>SII</Type>
    <Status>AP</Status>
  </Check>
  <Check>
    <Type>DCII</Type>
    <Status>AP</Status>
  </Check>
  <Check>
    <Type>FBI CHF</Type>
    <Status>AP</Status>
  </Check>
  <Check>
    <Type>NACI</Type>
    <Status>WR</Status>
  </Check>
  <CardIssuanceApproved>YES</CardIssuanceApproved>
  <Comments></Comments>
</NACI>
```

#### 7.4.103 PivCardRequest/Agency/Applicant/NACI/NACCaseNumber

Internal name: Xu40

#### 7.4.104 PivCardRequest/Agency/Applicant/NACI/NACICaseNumber

Internal name: Xu46

#### 7.4.105 PivCardRequest/Agency/Applicant/NACI/Check

Internal name: Xu41, Xu42, Xu43, Xu44, and Xu45

Contains one or more NACI background checks. You can have multiple **Check** elements in the import file. Each **Check** element contains the following elements:

- **Type** – The name of the background check. This can be one of the following:
  - SII
  - DCII
  - **FBI Name** – this option (which mapped to internal ID Xu43) is not supported. If you include this value in the import XML, it is ignored. If your system has been upgraded from an earlier version of MyID, your database may still have the Xu43 field; however, this field is no longer populated or used.
  - FBI CHF
  - NACI
- **Status** – the status of the NACI check. This can be one of the following:

- NR – Not Requested
- WR – Waiting Response
- AS – Assessing Response
- AP – Approved
- RJ – Rejected

#### 7.4.106 PivCardRequest/Agency/Applicant/NACI/CardIssuanceApproved

Internal name: UserDataApproved

**Note:** Throughout the [PIV Integration Guide](#), this field is referred to as the *User Data Approved* flag.

Contains information on whether card issuance is approved for this applicant. Can be one of the following values:

- YES or 1
- NO or 0

This flag confirms that the data being sent to MyID has passed all the enrollment checks required for card issuance. You must set this flag when adding an applicant for the first time, and also on card renewal.

**Note:** The `VettingDate` defaults to the current date if `CardIssuanceApproved` is set to YES or 1, and an explicit `VettingDate` is not provided in the request.

#### 7.4.107 PivCardRequest/Agency/Applicant/NACI/Comments

Internal name: Xu33

Free text description, up to 255 characters, of any background checks.

#### 7.4.108 PivCardRequest/Agency/Applicant/NACI/VettingDate

Internal name: `VettingDate`

Contains the date on which the applicant's identity checks were carried out. The format is:

YYYY-MM-DDThh:mm:ss

You can use this field to ensure that the applicant's identity checks are renewed periodically. See the *Identity checks* section in the [Administration Guide](#) for details.

#### 7.4.109 PivCardRequest/Agency/Applicant/Photo

Contains the applicant's photo. This is an `EncodedData` type block, with an `Encoding` value of `jpg`, `gif`, `bmp` or `png`, and the `Data` block containing a base64-encoded image.

See section [7.4.99.2, EncodedData](#) for details of the `EncodedData` format.

#### 7.4.110 PivCardRequest/Agency/Applicant/System

Contains system information for the application.

Required for PIV issuance.

#### 7.4.111 PivCardRequest/Agency/Applicant/System/GUID

Internal name: Xu51

Unique ID used as part of the Card Holder Unique ID (CHUID).

Mandatory.

#### 7.4.112 PivCardRequest/Agency/Applicant/System/CredNo

Internal name: Xu48

Credential Number – encoded in the FASC-N.

Mandatory.

#### 7.4.113 PivCardRequest/Agency/Applicant/System/CS

Credential Series – always set to 1, but is ignored in the import anyway and the result is always 1. If you need to increment the credential series, contact customer support for details.

#### 7.4.114 PivCardRequest/Agency/Applicant/System/POA

Legacy field – replaced by Applicant/EmployeeAssociation.

#### 7.4.115 PivCardRequest/Agency/Applicant/System/ICI

Internal name: Xu47

The issue number of the next card to be issued. This is encoded in the FASCN. Recommend coding as a 1 always.

Mandatory only for Add.

#### 7.4.116 PivCardRequest/Agency/Applicant/System/UserStatus

Internal name: Xu50

The state of the applicant in the process. This is displayed in the View Person workflow. Can be one of the following:

- Sponsored
- EnrollmentBegun
- EnrollmentComplete
- Vetting
- Escalated
- Approved
- CardRequested
- CardActivated
- Rejected

**Note:** The schema specifies a maximum of 50 characters, but the MyID limit is 40 characters.

#### 7.4.117 PivCardRequest/Agency/Applicant/System/IssuanceNotifyURL

Internal name: Xu56

An override for the destination of the Card Issuance Notification XML that is sent when a card for the Applicant is issued.

**Note:** This notification is sent only when you issue a card through the MyID Desktop application. If you collect a card through the Self-Service App or Self-Service Kiosk, you must set up the `Notifications` table instead – see the *PIV notifications* section in the [PIV Integration Guide](#) for details.

#### 7.4.118 PivCardRequest/Agency/Applicant/System/CancelNotifyURL

Specifies an URL to be used for notifications for card cancellations. This allows you to specify a different URL for cancellations and issuance.

#### 7.4.119 PivCardRequest/Agency/Applicant/System/CMSIssuanceNotifyURL

Specifies an URL to be used for notifications for card issuance. This allows you to specify a different URL for cancellations and issuance.

**Note:** Reserved for future use.

#### 7.4.120 PivCardRequest/Agency/Applicant/AdminGroups

An optional node that allows you to specify one or more administrative groups for the user. See the Administration Guide for details of setting up and using administrative groups.

The `AdminGroups` node contains one or more `AdminGroup`.

For example:

```
<AdminGroups>
  <AdminGroup>
    <Name>Group 1</Name>
  </AdminGroup>
</AdminGroups>
```

or:

```
<AdminGroups>
  <AdminGroup>
    <Name>Group 1</Name>
  </AdminGroup>
  <AdminGroup>
    <Name>Group 2</Name>
  </AdminGroup>
</AdminGroups>
```

If the user has existing administrative groups, they are replaced by the specified group or groups. If you specify an empty `AdminGroups` node, this clears all of the user's administrative groups. If you do not specify an `AdminGroups` node, the user's administrative groups remain unchanged.

#### 7.4.121 PivCardRequest/Agency/Applicant/AdminGroups/AdminGroup

Specifies an administrative group for the user. You can have multiple `AdminGroup` nodes in the `AdminGroups` parent node. An `AdminGroup` node contains a single `Name` node.

#### 7.4.122 PivCardRequest/Agency/Applicant/AdminGroups/AdminGroup/Name

Specifies the name of the administrative group for the user.

**Note:** The group must already exist in the MyID database. If the group does not exist, the import will fail.

#### 7.4.123 PivCardRequest/Agency/Applicant/AdditionalFields

You can import information into additional extended fields using the data import. See section [3.8.1, Additional user fields](#) for details.

#### 7.4.124 PivCardRequest/Agency/Applicant/Actions

Contains actions to carry out for the applicant; for example, to remove or disable the user, or to cancel the user's credentials.

#### 7.4.125 PivCardRequest/Agency/Applicant/Actions/ApplicantAction

Perform an action on the applicant. If you do not supply an action in the `ApplicantAction` element, a suspended applicant will be unsuspended.

The possible actions are:

- `Disable` – disable the user's account.
- `Remove` – remove the user from the system.
- `CancelDevices` – cancel all the user's credentials.
- `CancelDevice` – cancel specific credentials. Specify the credentials using the `Device` element.
- `CancelJob` – Cancel a specific job. Specify the job using the `PivCardRequest/Agency/Applicant/Actions/Job` element.
- `CancelAllJobs` – Cancel all jobs for the specified user.
- `RenewCertificate` – renew a certificate. Specify the certificate using `PivCardRequest/Agency/Applicant/Actions/CertSerialNumber` and `PivCardRequest/Agency/Applicant/Actions/CertPolicyName`.

#### 7.4.126 PivCardRequest/Agency/Applicant/Actions/CertSerialNumber

Used in conjunction with an `ApplicantAction` of `RenewCertificate` and `PivCardRequest/Agency/Applicant/Actions/CertPolicyName` to specify a certificate to renew.

#### 7.4.127 PivCardRequest/Agency/Applicant/Actions/CertPolicyName

Used in conjunction with an `ApplicantAction` of `RenewCertificate` and `PivCardRequest/Agency/Applicant/Actions/CertSerialNumber` to specify a certificate to renew.

#### 7.4.128 PivCardRequest/Agency/Applicant/Actions/StatusMappingID

The action to apply to the user. This should be an ID that matches an entry in the `StatusMappings` table. It controls how certificates are revoked.

**Note:** You cannot specify negative IDs from the `StatusMappings` table – these are reserved for system use.

#### 7.4.129 PivCardRequest/Agency/Applicant/Actions/RevocationComment

A free text description that is stored against revoked certificates in the database.

**7.4.130 PivCardRequest/Agency/Applicant/Actions/Device**

Specifies the credential (for example, a smart card) to cancel when you have selected `CancelDevice` for the `ApplicantAction`. Contains at least one `DeviceIdentifier` element. You can specify more than one credential to cancel by including multiple `DeviceIdentifier` elements.

**7.4.131 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier**

Specifies the credential to be canceled or unlocked.

**7.4.132 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier/SerialNumber**

The serial number of the credential.

**7.4.133 PivCardRequest/Agency/Applicant/Actions/Device/DeviceIdentifier/SerialNumberField**

The name of the field in which to look for the serial number. The field can be any field present in the `vDevices` view; for example, `SerialNumber` for the standard serial number or `HIDSerialNumber` for the HID serial number.

If you do not include a `SerialNumberField` node, MyID will use a default value of `SerialNumber`.

**7.4.134 PivCardRequest/Agency/Applicant/Actions/Device/ProcessStatus**

Used to specify the process status to be used for the credential being canceled.

You can use the following status codes, as listed in the `DeviceProcessStatuses` table in the database.

| Status                      | Description                                                    |
|-----------------------------|----------------------------------------------------------------|
| Active                      | Device is operational                                          |
| Assigned                    | Device is assigned to a user but has not begun personalization |
| AtBureau                    | Device is at the bureau                                        |
| Collected                   | Collected                                                      |
| Disposed                    | Disposed                                                       |
| Erased                      | Erased                                                         |
| Legacy                      | Legacy                                                         |
| Lost                        | Lost                                                           |
| None                        | None (Default the card may be re-issued)                       |
| Not Disposed                | Not Collected                                                  |
| PendingActivation           | Device is ready to be activated                                |
| PendingDeliveryConfirmation | Device has been dispatched from the bureau and is in transit   |
| PendingPersonalisation      | Device is ready to be personalized                             |
| Terminated                  | Card has been terminated                                       |
| Unassigned                  | Device is not assigned to a user                               |

You can customize your system with additional disposal statuses; for information on the configuration required, contact customer support quoting reference SUP-387.

#### 7.4.135 PivCardRequest/Agency/Applicant/Actions/Job

Contains a the ID of a job to cancel. Used in conjunction with an `ApplicantAction` of `CancelJob`.

## 7.5 PivApplicantUpdate structure

The `PivApplicantUpdate` schema uses the same data elements as the `PivCardRequest` schema. This schema requires less information as a minimum, however. See the schema for details of the minimum data required.

For example:

- `PivCardRequest/Agency/Applicant/Sponsor` is mandatory for `PivCardRequest`.
- `PivCardRequest/Agency/Applicant/Sponsor/SponsorName` is mandatory for `PivCardRequest`.
- `PivCardRequest/Agency/Applicant/Sponsor/SponsorAgency` is mandatory for `PivCardRequest`.
- `PivCardRequest/Agency/Applicant/System/GUID` is mandatory for `PivCardRequest`.
- `PivCardRequest/Agency/Applicant/System/CredNo` is mandatory for `PivCardRequest`.
- `PivCardRequest/Agency/Applicant/System/ICI` is mandatory for `PivCardRequest`.

## 7.6 PivImportResponse structure

The `PivImportResponse` schema is used when the XML import service passes back information about the results of the applicant data import.. It contains blocks for the `Agency` and the `Applicant`.

### 7.6.1 PivImportResponse/Agency

Contains information about the agency.

### 7.6.2 PivImportResponse/Agency/AgencyName

Internal name: `Name` and `Xu3`

Used to identify the Agency. Also encoded in the DN for member Applicants.

### 7.6.3 PivImportResponse/Agency/AgencyCode

Internal name: `Xg1`

Four alphanumeric characters. Encoded in the FASCN and in the `PrintedInfo` block.

### 7.6.4 PivImportResponse/Agency/Result

The result of the import for the agency. Can be one of the following:

- `Created`
- `Already Exists`
- `Failed`

### 7.6.5 PivImportResponse/Agency/Applicant

Contains information about the applicant.

### 7.6.6 PivImportResponse/Agency/Applicant/FirstName

Internal name: `FirstName`

The applicant's first name.

### 7.6.7 PivImportResponse/Agency/Applicant/LastName

Internal name: `Surname`

The applicant's last name.

### 7.6.8 PivImportResponse/Agency/Applicant/EmployeeID

Internal name: `EmployeeID`

This is a unique, numerical identifier for the applicant.

### 7.6.9 PivImportResponse/Agency/Applicant/CardRequest

Internal name: `Jobs.ID`

The JobID for the card request. If there is no request, returns 0.

### 7.6.10 PivImportResponse/Agency/Applicant/CardUpdate

Internal name: `Jobs.ID`

The Job ID for the card update request. If there is no request, returns 0.

#### 7.6.11 PivImportResponse/Agency/Applicant/CardRequestFailReason

The reason the card request failed.

#### 7.6.12 PivImportResponse/Agency/Applicant/Result

The result of the import for the applicant. Can be one of the following:

- Added
- Already Exists
- Failed
- Removed
- License Limit

#### 7.6.13 PivImportResponse/Agency/Applicant/Reason

Provides information about the response, including details of the reason why the request failed; for example, the name of a non-existent credential profile.

## 8 MyIDEnroll WSDL

The WSDL definition for the MyIDEnroll web service is as follows:

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tm="http://microsoft.com/wsdl/mime/textMatching/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:mime="http://schemas.xmlsoap.org/wsdl/mime/"
xmlns:tns="http://www.intercede.com/MyIDEnroll" xmlns:s="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
xmlns:http="http://schemas.xmlsoap.org/wsdl/http/" targetNamespace
="http://www.intercede.com/MyIDEnroll" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <s:schema
elementFormDefault="qualified" targetNamespace="http://www.intercede.com/MyIDEnroll">
      <s:element name="PIVXMLWebImport">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="xmlIn" type="s:string" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="PIVXMLWebImportResponse">
        <s:complexType>
          <s:sequence>
            <s:element
minOccurs="0" maxOccurs="1" name="PIVXMLWebImportResult" type="s:string" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="CMSXMLWebImport">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="xmlIn" type="s:string" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="CMSXMLWebImportResponse">
        <s:complexType>
          <s:sequence>
            <s:element
minOccurs="0" maxOccurs="1" name="CMSXMLWebImportResult" type="s:string" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="XMLImport">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="ParametersXML" type="s:string" />
            <s:element minOccurs="0" maxOccurs="1" name="xmlData" type="s:string" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="XMLImportResponse">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="XMLImportResult" type="s:string"
/>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:schema>
  </wsdl:types>

```

```

        </s:sequence>
    </s:complexType>
</s:element>
</s:schema>
</wsdl:types>
<wsdl:message name="PIVXMLWebImportSoapIn">
    <wsdl:part name="parameters" element="tns:PIVXMLWebImport" />
</wsdl:message>
<wsdl:message name="PIVXMLWebImportSoapOut">
    <wsdl:part name="parameters" element="tns:PIVXMLWebImportResponse" />
</wsdl:message>
<wsdl:message name="CMSXMLWebImportSoapIn">
    <wsdl:part name="parameters" element="tns:CMSXMLWebImport" />
</wsdl:message>
<wsdl:message name="CMSXMLWebImportSoapOut">
    <wsdl:part name="parameters" element="tns:CMSXMLWebImportResponse" />
</wsdl:message>
<wsdl:message name="XMLImportSoapIn">
    <wsdl:part name="parameters" element="tns:XMLImport" />
</wsdl:message>
<wsdl:message name="XMLImportSoapOut">
    <wsdl:part name="parameters" element="tns:XMLImportResponse" />
</wsdl:message>
<wsdl:portType name="MyIDEnrollSoap">
    <wsdl:operation name="PIVXMLWebImport">
        <wsdl:input message="tns:PIVXMLWebImportSoapIn" />
        <wsdl:output message="tns:PIVXMLWebImportSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="CMSXMLWebImport">
        <wsdl:input message="tns:CMSXMLWebImportSoapIn" />
        <wsdl:output message="tns:CMSXMLWebImportSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="XMLImport">
        <wsdl:input message="tns:XMLImportSoapIn" />
        <wsdl:output message="tns:XMLImportSoapOut" />
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="MyIDEnrollSoap" type="tns:MyIDEnrollSoap">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
    <wsdl:operation name="PIVXMLWebImport">
        <soap:operation
soapAction="http://www.intercede.com/MyIDEnroll/PIVXMLWebImport" style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CMSXMLWebImport">
        <soap:operation
soapAction="http://www.intercede.com/MyIDEnroll/CMSXMLWebImport" style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>

```

```

        <wsdl:operation name="XMLImport">
            <soap:operation
soapAction="http://www.intercede.com/MyIDEnroll/XMLImport" style="document" />
            <wsdl:input>
                <soap:body use="literal" />
            </wsdl:input>
            <wsdl:output>
                <soap:body use="literal" />
            </wsdl:output>
        </wsdl:operation>
    </wsdl:binding>
    <wsdl:binding name="MyIDEnrollSoap12" type="tns:MyIDEnrollSoap">
        <soap12:binding transport="http://schemas.xmlsoap.org/soap/http" />
        <wsdl:operation name="PIVXMLWebImport">
            <soap12:operation
soapAction="http://www.intercede.com/MyIDEnroll/PIVXMLWebImport" style="document" />
            <wsdl:input>
                <soap12:body use="literal" />
            </wsdl:input>
            <wsdl:output>
                <soap12:body use="literal" />
            </wsdl:output>
        </wsdl:operation>
        <wsdl:operation name="CMSXMLWebImport">
            <soap12:operation
soapAction="http://www.intercede.com/MyIDEnroll/CMSXMLWebImport" style="document" />
            <wsdl:input>
                <soap12:body use="literal" />
            </wsdl:input>
            <wsdl:output>
                <soap12:body use="literal" />
            </wsdl:output>
        </wsdl:operation>
        <wsdl:operation name="XMLImport">
            <soap12:operation
soapAction="http://www.intercede.com/MyIDEnroll/XMLImport" style="document" />
            <wsdl:input>
                <soap12:body use="literal" />
            </wsdl:input>
            <wsdl:output>
                <soap12:body use="literal" />
            </wsdl:output>
        </wsdl:operation>
    </wsdl:binding>
    <wsdl:service name="MyIDEnroll">
        <wsdl:port name="MyIDEnrollSoap" binding="tns:MyIDEnrollSoap">
            <soap:address location="http://localhost/MyIDEnroll/MyIDEnroll.asmx" />
        </wsdl:port>
        <wsdl:port name="MyIDEnrollSoap12" binding="tns:MyIDEnrollSoap12">
            <soap12:address location="http://localhost/MyIDEnroll/MyIDEnroll.asmx" />
        </wsdl:port>
    </wsdl:service>
</wsdl:definitions>

```

## 9 XML schemas

This section contains listings of the Lifecycle schemas available, including:

- Details of the schema locations.  
See section [9.1, Schema file locations](#).
- The `MyIDBaseTypes` schema contains the common schema type for all of the MyID Lifecycle API schemas.  
See section [9.2, MyIDBaseTypes schema](#).
- The `CMSSchemaTypes` schema contains the common schema types for the `CMSCardRequest` and `CMSUserUpdate` schemas.  
See section [9.3, CMSSchemaTypes schema](#).
- The `CMSCardRequest` schema is used to create XML files containing user data to send to the XML web import service.  
See section [9.4, CMSCardRequest schema](#).
- The `CMSUserUpdate` schema is used to create XML files containing user data when you are updating an existing user in the MyID database.  
See section [9.5, CMSUserUpdate schema](#).
- The `CMSImportResponse` schema is used when the XML import service passes back information about the results of the user data import.  
See section [9.6, CMSImportResponse schema](#).
- The `PIVSchemaTypes` schema contains the common schema types for the `PIVCardRequest` and `PIVApplicantUpdate` schemas.  
See section [9.7, PIVSchemaTypes schema](#).
- The `PIVCardRequest` schema is used to create XML files containing PIV user data to send to the XML web import service.  
See section [9.8, PivCardRequest schema](#).
- The `PIVApplicantUpdate` schema is used to create XML files containing user data when you are updating an existing PIV user in the MyID database.  
See section [9.9, PivApplicantUpdate schema](#).
- The `PIVImportResponse` schema is used when the XML import service passes back information about the results of the PIV user data import.  
See section [9.10, PivImportResponse schema](#).

### 9.1 Schema file locations

The schema files are installed to the `Schemas` folder the `MyIDEnroll` folder on the MyID web server; by default, this is:

```
C:\Program Files\Intercede\MyID\Web\MyIDEnroll\Schemas
```

## 9.2 MyIDBaseTypes schema

This schema contains the elements common to all the MyID Lifecycle API schemas.

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://www.intercede.com/CommonTypes"
  xmlns:tng="http://www.intercede.com/CommonTypes"
  elementFormDefault="qualified" attributeFormDefault="qualified"
>
  <xs:simpleType name="String">
    <xs:restriction base="xs:string">
      <xs:pattern value="((?!&lt;.*&gt;)(?!_no_match_)(?!]]&gt;).)*" />
    </xs:restriction>
  </xs:simpleType>

  <xs:simpleType name="NotEmptyString">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString4">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="4"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString6">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="6"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString8">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="8"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString40">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="40"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString50">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="50"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString64">
    <xs:restriction base="tng:String">
      <xs:minLength value="1" />
      <xs:maxLength value="64"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="NotEmptyString80">
```

```
<xs:restriction base="tng:String">
  <xs:minLength value="1" />
  <xs:maxLength value="80"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="NotEmptyString100">
  <xs:restriction base="tng:String">
    <xs:minLength value="1" />
    <xs:maxLength value="100"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="NotEmptyString255">
  <xs:restriction base="tng:String">
    <xs:minLength value="1" />
    <xs:maxLength value="255"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="String30">
  <xs:restriction base="tng:String">
    <xs:maxLength value="30"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String80">
  <xs:restriction base="tng:String">
    <xs:maxLength value="80"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String100">
  <xs:restriction base="tng:String">
    <xs:maxLength value="100"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String120">
  <xs:restriction base="tng:String">
    <xs:maxLength value="120"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String200">
  <xs:restriction base="tng:String">
    <xs:maxLength value="200"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String255">
  <xs:restriction base="tng:String">
    <xs:maxLength value="255"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String1024">
  <xs:restriction base="tng:String">
    <xs:maxLength value="1024"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String2">
  <xs:restriction base="tng:String">
    <xs:maxLength value="2"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String20">
```

```
<xs:restriction base="tng:String">
  <xs:maxLength value="20"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="String8">
  <xs:restriction base="tng:String">
    <xs:maxLength value="8"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String40">
  <xs:restriction base="tng:String">
    <xs:maxLength value="40"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String50">
  <xs:restriction base="tng:String">
    <xs:maxLength value="50"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String64">
  <xs:restriction base="tng:String">
    <xs:maxLength value="64"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String10">
  <xs:restriction base="tng:String">
    <xs:maxLength value="10"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String1">
  <xs:restriction base="tng:String">
    <xs:maxLength value="1"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String3">
  <xs:restriction base="tng:String">
    <xs:maxLength value="3"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String4">
  <xs:restriction base="tng:String">
    <xs:maxLength value="4"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String6">
  <xs:restriction base="tng:String">
    <xs:maxLength value="6"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="StringBase64">
  <xs:restriction base="xs:string">
    <xs:pattern value="[a-zA-Z0-9+ /=\n\r\w\t]*"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="Int50">
  <xs:restriction base="xs:string">
    <xs:maxLength value="50"/>
  </xs:restriction>
</xs:simpleType>
```

```

        <xs:pattern value="[0-9]*/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Int1">
    <xs:restriction base="xs:string">
        <xs:maxLength value="1"/>
        <xs:pattern value="[0-9]"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Int4">
    <xs:restriction base="xs:string">
        <xs:maxLength value="4"/>
        <xs:pattern value="[0-9]*/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Int9">
    <xs:restriction base="xs:string">
        <xs:maxLength value="9"/>
        <xs:pattern value="[0-9]*/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="TrueFalse">
    <xs:restriction base="xs:string">
        <xs:enumeration value="true"/>
        <xs:enumeration value="false"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="YesNo">
    <xs:restriction base="xs:string">
        <xs:enumeration value="YES"/>
        <xs:enumeration value="NO"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="YesNoOneZero">
    <xs:restriction base="xs:string">
        <xs:enumeration value="YES"/>
        <xs:enumeration value="NO"/>
        <xs:enumeration value="1"/>
        <xs:enumeration value="0"/>
    </xs:restriction>
</xs:simpleType>

<xs:complexType name="EncryptedData">
    <xs:simpleContent>
        <xs:extension base="xs:string">
            <xs:attribute name="KeyName" type="xs:string" use="optional" />
            <xs:attribute name="Mode" type="xs:string" use="optional" />
        </xs:extension>
    </xs:simpleContent>
</xs:complexType>

<xs:complexType name="NotEmptyEncryptedData">
    <xs:simpleContent>
        <xs:restriction base="tng:EncryptedData">
            <xs:minLength value="1" />
        </xs:restriction>
    </xs:simpleContent>
</xs:complexType>

```

```
</xs:simpleContent>
</xs:complexType>

<xs:simpleType name="OperationType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="=" />
    <xs:enumeration value="!=" />
    <xs:enumeration value="gt" />
    <xs:enumeration value="lt" />
    <xs:enumeration value="ge" />
    <xs:enumeration value="le" />
    <xs:enumeration value="isnull" />
    <xs:enumeration value="notnull" />
    <xs:enumeration value="leftbracket" />
    <xs:enumeration value="rightbracket" />
  </xs:restriction>
</xs:simpleType>

</xs:schema>
```

### 9.3 CMSSchemaTypes schema

This schema contains the elements common to the `CMSCardRequest` and `CMSUserUpdate` schemas.

```
<?xml version="1.0"?>
<xs:schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  targetNamespace="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  xmlns="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
>

  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:complexType name="ParametersBlockType">
    <xs:all>
      <xs:element name="SourceID" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element name="IssueDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="GenerateUserDN" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="ActionOnDuplicate" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element
        name="RolesActionOnDuplicate" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element
        name="DeleteMissingUsers" type="xs:unsignedInt" minOccurs="1" maxOccurs="1"/>
      <xs:element
        name="PushToLDAP" type="xs:unsignedInt" minOccurs="1" maxOccurs="1"/>
      <xs:element
        name="CreateUnknownGroups" type="xs:integer" minOccurs="1" maxOccurs="1"/>
      <xs:element name="AuditAll" type="myidbase:Int1" minOccurs="1" maxOccurs="1"/>
      <xs:element name="DataType" type="xs:string" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="CheckImportResponseSchema" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="SynchronousImport" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="AllowBioImport" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="DefaultUserRole" type="xs:string" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="DisallowCertificateSuspension" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="CardRequestThrottling" type="xs:unsignedInt" minOccurs="0" maxOccurs="1"/>
      <xs:element
        name="ReplaceUnassignedCards" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
    </xs:all>
  </xs:complexType>

  <xs:complexType name="PersonalBlockType">
    <xs:sequence>
      <xs:choice>
        <xs:sequence>
          <xs:element
            name="FirstName" type="myidbase:NotEmptyString64" minOccurs="1" maxOccurs="1"/>
          <xs:element
```

```

name="LastName" type="myibase:NotEmptyString64" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:element
name="LastName" type="myibase:NotEmptyString64" minOccurs="1" maxOccurs="1"/>
  </xs:choice>
  <xs:element
name="Initial" type="myibase:String40" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Title" type="myibase:String20" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Email" type="myibase:String255" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="PhoneExt" type="myibase:String50" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="MobileNumber" type="myibase:String50" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="PhoneNumber" type="myibase:String50" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="EmployeeID" type="myibase:String50" minOccurs="1" maxOccurs="1"/>
  <xs:element
name="Optionalline1" type="myibase:String255" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Optionalline2" type="myibase:String255" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Optionalline3" type="myibase:String255" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Optionalline4" type="myibase:String255" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="AuthenticationBlockType">
  <xs:sequence>
    <xs:element name="SecurityPhrase" minOccurs="0" maxOccurs="unbounded">
      <xs:complexType>
        <xs:sequence>
          <xs:element
name="Prompt" type="myibase:NotEmptyString255" minOccurs="1" maxOccurs="1"/>
          <xs:element
name="Answer" type="myibase:EncryptedData" minOccurs="1" maxOccurs="1"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="CardBlockType">
  <xs:sequence>
    <xs:element name="CardProfile" type="myibase:String50" minOccurs="0"/>
    <xs:element name="CardExpiryDate" type="xs:date" minOccurs="0"/>
    <xs:element name="Renewal" type="RenewalString" minOccurs="0"/>
    <xs:element name="ImportCard" type="myibase:Boolean" minOccurs="0"/>
    <xs:element name="CardRequestedBy" type="myibase:String255" minOccurs="0"/>
    <xs:element name="CancelExisting" minOccurs="0" maxOccurs="1"/>
    <xs:element name="JobLabel" type="myibase:String50" minOccurs="0"/>
    <xs:element
name="Update" minOccurs="0" maxOccurs="1" type="UpdateCardBlockType"/>
    <xs:element name="Replacement" minOccurs="0" type="ReplacementCardBlockType"/>
    <xs:element
name="GenerateOTP" minOccurs="0" maxOccurs="1" type="GenerateOTPBlockType"/>
  </xs:sequence>

```

```

name="OriginalSerialNumber" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="OriginalDeviceType" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="SerialNumber" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
  <xs:element
name="DeviceType" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
  <xs:element
name="StatusMapping" type="xs:unsignedByte" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="RevocationComment" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="Reprovision" type="xs:unsignedByte" minOccurs="0" maxOccurs="1"/>
  <xs:element
name="CardLayout" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
  <xs:element
name="Container" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
  <xs:element
name="Certificate" type="myidbase:StringBase64" minOccurs="0" maxOccurs="1" />
    <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
      <xs:complexType mixed="true">
        <xs:sequence>
          <xs:any
minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="UpdateCardBlockType">
  <xs:sequence>
    <xs:element
name="OriginalSerialNumber" type="myidbase:String50" minOccurs="1" maxOccurs="1" />
    <xs:element
name="OriginalDeviceType" type="myidbase:String50" minOccurs="1" maxOccurs="1" />
    <xs:element name="StatusMapping" type="xs:int" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="ParametersXML" type="JobParameters" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="ReplacementCardBlockType">
  <xs:all>
    <xs:element
name="OriginalSerialNumber" type="myidbase:String50" minOccurs="1" maxOccurs="1"/>
    <xs:element
name="OriginalDeviceType" type="myidbase:String50" minOccurs="1" maxOccurs="1"/>
    <xs:element name="StatusMapping" type="xs:int" minOccurs="0" maxOccurs="1"/>
  </xs:all>
</xs:complexType>

<xs:complexType name="CardUpdateBlockType">
  <xs:all>
    <xs:element
name="SerialNumber" type="myidbase:String255" minOccurs="1" maxOccurs="1"/>
    <xs:element
name="DeviceType" type="myidbase:String255" minOccurs="1" maxOccurs="1"/>
    <xs:element
name="CardRequestedBy" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>

```

```

        <xs:element
name="ParametersXML" type="JobParameters" minOccurs="1" maxOccurs="1"/>
        <xs:element name="PIN" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
    </xs:all>
</xs:complexType>

<xs:complexType name="AccountBlockType">
    <xs:sequence>
        <xs:element name="DN" type="myidbase:String1024" minOccurs="0" maxOccurs="1"/>
        <xs:element name="CN" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element name="OU" type="myidbase:String1024" minOccurs="0" maxOccurs="1"/>
        <xs:element name="UPN" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="SAMAccountName" type="myidbase:String20" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="Domain" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="LogonName" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="NewLogonName" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="UniqueID" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element name="Roles" minOccurs="0" maxOccurs="1" type="RolesBlockType"/>
        <xs:element
name="EntrustProfile" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="UserDataApproved" type="myidbase:YesNoOneZero" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="MaxRequestExpiryDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="VettingDate" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="UserSID" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="RolesBlockType">
    <xs:sequence>
        <xs:element
name="Role" minOccurs="0" maxOccurs="unbounded" type="RoleBlockType"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="RoleBlockType">
    <xs:sequence>
        <xs:element name="Name" type="myidbase:String255" minOccurs="1"/>
        <xs:element name="Scope" type="RoleScope" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="LogonMechanism" type="RoleLogonMechanism" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="PhotoBlockType">
    <xs:sequence>
        <xs:choice>
            <xs:sequence>
                <xs:element
name="Encoding" type="FileEncoding" maxOccurs="1" minOccurs="1"/>
                <xs:element
name="Data" type="myidbase:StringBase64" maxOccurs="1" minOccurs="1"/>
            </xs:sequence>
        </xs:choice>
    </xs:sequence>
</xs:complexType>

```

```
        <xs:element
name="DateTaken" type="xs:dateTime" maxOccurs="1" minOccurs="0"/>
        <xs:element
name="Source" type="myidbase:String50" maxOccurs="1" minOccurs="0"/>
    </xs:sequence>
    <xs:element
name="None" type="myidbase:String50" maxOccurs="1" minOccurs="1"/>
</xs:choice>
</xs:sequence>
</xs:complexType>

<xs:simpleType name="FileEncoding">
    <xs:restriction base="xs:string">
        <xs:enumeration value="jpg"/>
        <xs:enumeration value="gif"/>
        <xs:enumeration value="png"/>
        <xs:enumeration value="bmp"/>
        <xs:enumeration value="378"/>
        <xs:enumeration value="385"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="RoleScope">
    <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="Self"/>
        <xs:enumeration value="Department"/>
        <xs:enumeration value="Division"/>
        <xs:enumeration value="All"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="RoleLogonMechanism">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Password"/>
        <xs:enumeration value="Card"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="UserAction">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Disable"/>
        <xs:enumeration value="Remove"/>
        <xs:enumeration value="CancelDevices"/>
        <xs:enumeration value="CancelDevice"/>
        <xs:enumeration value="CancelJob"/>
        <xs:enumeration value="CancelAllJobs"/>
        <xs:enumeration value="UnlockCard"/>
        <xs:enumeration value="RenewCertificate"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="RenewalString">
    <xs:restriction base="xs:string">
        <xs:enumeration value="true"/>
        <xs:enumeration value="false"/>
    </xs:restriction>
</xs:simpleType>
```

```

<xs:complexType name="JobParameters">
  <xs:sequence>
    <xs:element name="UnlockPIN" type="xs:unsignedInt" maxOccurs="1" minOccurs="0"
  />
    <xs:element name="ReIssue" type="xs:unsignedInt" maxOccurs="1" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

<xs:complexType name="ActionsBlockType">
  <xs:sequence>
    <xs:element
name="ApplicantAction" type="UserAction" minOccurs="0" maxOccurs="1"/>
    <!-- MPS-69 to support certificate renewal -->
    <xs:element
name="CertSerialNumber" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="CertPolicyName" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
    <!-- -->
    <xs:element
name="StatusMappingID" type="xs:unsignedInt" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="RevocationComment" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="RevocationDelay" type="xs:unsignedInt" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Device" minOccurs="0">
      <xs:complexType>
        <xs:sequence>
          <xs:element
name="DeviceIdentifier" minOccurs="0" maxOccurs="unbounded" type
="DeviceIdentifierBlockType"/>
          <xs:element
name="ProcessStatus" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element
name="RequestedBy" type="myidbase:String255" minOccurs="0" maxOccurs="1" />
    <xs:element
name="Job" type="xs:unsignedInt" minOccurs="0" maxOccurs="unbounded" />
    <xs:element name="Filters" type="FilterCriteria" minOccurs="0" maxOccurs="1"
  />
  </xs:sequence>
</xs:complexType>

<xs:complexType name="DeviceIdentifierBlockType">
  <xs:sequence>
    <xs:element name="SerialNumber" type="myidbase:String50" minOccurs="1"/>
    <xs:element name="SerialNumberField" type="myidbase:String50" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="FilterCriteria">
  <xs:sequence>
    <xs:element name="Filter" minOccurs="1" maxOccurs="unbounded">
      <xs:complexType>
        <xs:sequence>
          <xs:element
name="FieldName" type="xs:string" minOccurs="0" maxOccurs="1" />

```

```

        <xs:element
name="FieldValue" type="xs:string" minOccurs="0" maxOccurs="1" />
        <xs:element
name="Operation" minOccurs="1" maxOccurs="1" type="myidbase:OperationType"/>
        <xs:element
name="Or" type="xs:boolean" minOccurs="0" maxOccurs="1" />
    </xs:sequence>
</xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>

<xs:complexType name="GenerateOTPBlockType">
    <xs:sequence>
        <xs:element name="Notification" minOccurs="0" maxOccurs="unbounded">
            <xs:complexType>
                <xs:sequence>
                    <xs:element
name="Name" type="myidbase:String255" minOccurs="1" maxOccurs="1" />
                    <xs:element
name="Action" type="myidbase:String10" minOccurs="0" maxOccurs="1" />
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="AdminGroupsBlockType">
    <xs:sequence>
        <xs:element name="AdminGroup" minOccurs="0" maxOccurs="unbounded">
            <xs:complexType>
                <xs:sequence>
                    <xs:element name="Name" minOccurs="1" type="myidbase:String100" />
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>
</xs:schema>
```

## 9.4 CMSCardRequest schema

This schema is used for user data sent to the import service to request cards.

For information about the elements of this schema, see section [7.1](#), *CMSCardRequest structure*.

```
<?xml version="1.0"?>
<xs:schema
  id="CMSCardRequest"
  targetNamespace="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  xmlns="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
  attributeFormDefault="unqualified" elementFormDefault="qualified"
>
  <xs:include schemaLocation="CMSSchemaTypes.xsd" />
  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:element name="CMSCardRequest" msdata:IsDataSet="true" msdata:Locale="en-GB"
    msdata:EnforceConstraints="false">
    <xs:complexType>
      <xs:sequence>
        <xs:element
          name="Parameters" minOccurs="0" maxOccurs="1" type="ParametersBlockType"/>
        <xs:element name="Group" minOccurs="0" maxOccurs="1" type="GroupBlockType"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <xs:complexType name="GroupBlockType">
    <xs:sequence>
      <xs:element name="Name" type="myidbase:String100" minOccurs="1"/>
      <xs:element
        name="Description" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
      <xs:element name="OrgUnit" type="myidbase:String1024" minOccurs="0"/>
      <xs:element name="Parent" type="myidbase:String80" minOccurs="0"/>
      <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
        <xs:complexType mixed="true">
          <xs:sequence>
            <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="User" minOccurs="0" maxOccurs="1" type="UserBlockType"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="UserBlockType">
    <xs:sequence>
      <xs:element name="Personal" type="PersonalBlockType"/>
      <xs:element
        name="Authentication" type="AuthenticationBlockType" minOccurs="0" maxOccurs="1" />
      <xs:element name="Card" minOccurs="0" type="CardBlockType"/>
      <xs:element name="CardUpdate" minOccurs="0" type="CardUpdateBlockType"/>
      <xs:element name="Account" minOccurs="0" type="AccountBlockType" />
      <xs:element name="Photo" minOccurs="0" type="PhotoBlockType"/>
    </xs:sequence>
  </xs:complexType>

```

```
name="AdminGroups" minOccurs="0" maxOccurs="1" type="AdminGroupsBlockType" />
  <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
    <xs:complexType mixed="true">
      <xs:sequence>
        <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="Actions" minOccurs="0" maxOccurs="1" type="ActionsBlockType"/>
</xs:sequence>
</xs:complexType>

</xs:schema>
```

## 9.5 CMSUserUpdate schema

This schema is used to update existing users.

For information about the elements of this schema, see section [7.2, CMSUserUpdate structure](#).

```
<?xml version="1.0"?>
<xs:schema
  id="CMSCardRequest"
  targetNamespace="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  xmlns="http://www.intercede.com/MyIDSchema/CMSCardRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
  attributeFormDefault="unqualified" elementFormDefault="qualified"
>

  <xs:include schemaLocation="CMSSchemaTypes.xsd" />
  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:element name="CMSCardRequest" msdata:IsDataSet="true" msdata:Locale="en-GB"
    msdata:EnforceConstraints="false">
    <xs:complexType>
      <xs:sequence>
        <xs:element
          name="Parameters" minOccurs="0" maxOccurs="1" type="ParametersBlockType"/>
        <xs:element
          name="Group" maxOccurs="unbounded" minOccurs="0" type="GroupBlockType"/>
        <xs:element
          name="User" minOccurs="0" maxOccurs="unbounded" type="UserBlockType"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <xs:complexType name="GroupBlockType">
    <xs:sequence>
      <xs:element name="Name" type="myidbase:String100" minOccurs="1"/>
      <xs:element
        name="Description" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
      <xs:element name="OrgUnit" type="myidbase:String1024" minOccurs="0"/>
      <xs:element name="Parent" type="myidbase:String80" minOccurs="0"/>
      <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
        <xs:complexType mixed="true">
          <xs:sequence>
            <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="User" maxOccurs="unbounded" type="UserBlockType"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="UserBlockType">
    <xs:sequence>
      <xs:element name="Personal" type="PersonalBlockType"/>
      <xs:element
        name="Authentication" minOccurs="0" maxOccurs="1" type="AuthenticationBlockType"/>
      <xs:element name="Card" minOccurs="0" type="CardBlockType"/>
    </xs:sequence>
  </xs:complexType>

```

```
<xs:element name="Account" minOccurs="0" type="AccountBlockType" />
<xs:element name="Photo" minOccurs="0" type="PhotoBlockType"/>
<xs:element
name="AdminGroups" minOccurs="0" maxOccurs="1" type="AdminGroupsBlockType" />
<xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
  <xs:complexType mixed="true">
    <xs:sequence>
      <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="Actions" minOccurs="0" maxOccurs="1" type="ActionsBlockType"/>
</xs:sequence>
</xs:complexType>

</xs:schema>
```

## 9.6 CMSImportResponse schema

This schema is used by the import service to pass back information about the user import. For information about the elements of this schema, see section [7.3, CMSImportResponse structure](#).

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema
id="CMSImportResponse" targetNamespace
="http://www.intercede.com/MyIDSchema/CMSImportResponse"
xmlns:mstns="http://www.intercede.com/MyIDSchema/CMSImportResponse" attributeFormDefault
="unqualified" elementFormDefault="qualified" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="CMSImportResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Group" minOccurs="0" maxOccurs="unbounded">
          <xs:complexType>
            <xs:sequence>
              <xs:element
name="Name" type="mstns:String80" minOccurs="1" maxOccurs="1"/>
              <xs:element
name="Result" type="mstns:ActionStatus" minOccurs="1" maxOccurs="1" />
              <xs:element
name="User" type="mstns:User" minOccurs="0" maxOccurs="unbounded" />
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element
name="User" type="mstns:User" minOccurs="0" maxOccurs="unbounded" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <xs:complexType name="User">
    <xs:sequence>
      <xs:element
name="FirstName" type="mstns:String64" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="LastName" type="mstns:String64" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="EmployeeID" type="mstns:String50" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="LogonName" type="mstns:String50" minOccurs="1" maxOccurs="1"/>
      <xs:element name="CardRequest" type="xs:int" minOccurs="1" maxOccurs="1"
/>
      <xs:element name="CardUpdate" type="xs:int" minOccurs="1" maxOccurs="1" />
      <xs:element
name="UnlockCardRequest" type="xs:int" minOccurs="1" maxOccurs="1" />
      <xs:element
name="Result" type="mstns:ActionStatus" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="Reason" type="xs:string" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
  </xs:complexType>

  <xs:simpleType name="String50">
    <xs:restriction base="xs:string">
      <xs:maxLength value="50" />
    </xs:restriction>
  </xs:simpleType>
</xs:schema>
```

```
</xs:simpleType>
<xs:simpleType name="String80">
  <xs:restriction base="xs:string">
    <xs:maxLength value="80" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String64">
  <xs:restriction base="xs:string">
    <xs:maxLength value="64" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="ActionStatus">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Added"/>
    <xs:enumeration value="Created"/>
    <xs:enumeration value="Already Exists"/>
    <xs:enumeration value="Failed"/>
    <xs:enumeration value="Removed"/>
    <xs:enumeration value="License Limit"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>
```

## 9.7 PIVSchemaTypes schema

This schema contains the elements common to the `PivCardRequest` and `PivApplicantUpdate` schemas.

```
<?xml version="1.0"?>
<xs:schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  targetNamespace="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  xmlns="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  elementFormDefault="qualified" attributeFormDefault="qualified"
  >
  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:complexType name="ParametersBlockType">
    <xs:all>
      <xs:element name="SourceID" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element name="IssueDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="GenerateUserDN" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="ActionOnDuplicate" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="RolesActionOnDuplicate" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="DeleteMissingUsers" type="xs:unsignedInt" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="PushToLDAP" type="xs:unsignedInt" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="CreateUnknownGroups" type="xs:integer" minOccurs="1" maxOccurs="1"/>
      <xs:element name="AuditAll" type="myidbase:Int1" minOccurs="1" maxOccurs="1"/>
      <xs:element name="DataType" type="xs:string" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="CheckImportResponseSchema" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="SynchronousImport" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="AllowBioImport" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="DefaultUserRole" type="xs:string" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="DisallowCertificateSuspension" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="CardRequestThrottling" type="xs:unsignedInt" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="ReplaceUnassignedCards" type="myidbase:Int1" minOccurs="0" maxOccurs="1"/>
    </xs:all>
  </xs:complexType>

  <xs:complexType name="AgencyAddressBlockType">
    <xs:sequence>
      <xs:element name="Address1" type="myidbase:String40" minOccurs="0"/>
      <xs:element name="Address2" type="myidbase:String40" minOccurs="0"/>
      <xs:element name="City" type="myidbase:String40" minOccurs="1"/>
      <xs:element name="State" type="myidbase:String40" minOccurs="0"/>
      <xs:element name="Zip" type="myidbase:String10" minOccurs="0"/>
      <xs:element name="PhoneNumber" type="myidbase:String30" minOccurs="0"/>
      <xs:element name="Country" type="myidbase:String40" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
</xs:schema>
```

```

        <xs:element name="Email" type="myibase:String120" minOccurs="0"/>
        <xs:element name="Contact" type="myibase:String80" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>

<!-- Complex PIV elements -->
<xs:complexType name="PersonalBlockType">
    <xs:sequence>
        <xs:element name="FirstName" type="myibase:NotEmptyString64" minOccurs="1"/>
        <xs:element name="LastName" type="myibase:NotEmptyString64" minOccurs="1"/>
        <xs:element name="NickName" type="myibase:String80" minOccurs="0"/>
        <xs:element name="MiddleName" type="myibase:String50" minOccurs="0"/>
        <xs:element name="Suffix" type="myibase:String20" minOccurs="0"/>
        <xs:element name="Title" type="myibase:String20" minOccurs="0"/>
        <xs:element name="Email" type="myibase:String255" minOccurs="0"/>
        <xs:element name="Fax" type="myibase:String50" minOccurs="0"/>
        <xs:element name="Cell" type="myibase:String50" minOccurs="0"/>
        <xs:element name="Phone" type="myibase:String50" minOccurs="0"/>
        <xs:element name="EmployeeID" type="myibase:Int50" minOccurs="1"/>
        <xs:element name="Address" minOccurs="0" type="PersonalAddressBlockType" />
        <xs:element name="BirthDate" type="xs:date" minOccurs="0"/>
        <xs:element name="Nationality" type="myibase:String4" minOccurs="0"/>
        <xs:element name="Citizenship" type="CitizenshipString" minOccurs="0"/>
        <xs:element name="CountryOfBirth" type="myibase:String2" minOccurs="0"/>
        <xs:element name="PlaceOfBirth" type="myibase:String2" minOccurs="0"/>
        <xs:element
name="ExportRestrictions" type="ExportRestrictionsString" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="CardBlockType">
    <xs:sequence>
        <xs:element name="CardProfile" type="myibase:String50" minOccurs="0"/>
        <xs:element name="CardExpiryDate" type="xs:date" minOccurs="0"/>
        <xs:element name="Renewal" type="RenewalString" minOccurs="0"/>
        <xs:element name="ImportCard" type="myibase:Boolean" minOccurs="0"/>
        <xs:element name="CardRequestedBy" type="myibase:String255" minOccurs="0"/>
        <xs:element name="JobLabel" type="myibase:String50" minOccurs="0"/>
        <xs:element
name="Update" type="UpdateCardBlockType" minOccurs="0" maxOccurs="1"/>
        <xs:element name="Replacement" type="ReplacementCardBlockType" minOccurs="0"/>
        <xs:element
name="Reprovision" type="xs:unsignedByte" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="CardLayout" type="myibase:String50" minOccurs="0" maxOccurs="1" />
        <xs:element
name="SerialNumber" type="myibase:String50" minOccurs="0" maxOccurs="1" />
        <xs:element
name="DeviceType" type="myibase:String50" minOccurs="0" maxOccurs="1" />
        <xs:element
name="Container" type="myibase:String50" minOccurs="0" maxOccurs="1" />
        <xs:element
name="Certificate" type="myibase:StringBase64" minOccurs="0" maxOccurs="1" />
    </xs:sequence>
</xs:complexType>

<xs:complexType name="UpdateCardBlockType">
    <xs:sequence>
        <xs:element
name="OriginalSerialNumber" type="myibase:String50" minOccurs="1" maxOccurs="1" />
    </xs:sequence>
</xs:complexType>

```

```

        <xs:element
name="OriginalDeviceType" type="myidbase:String50" minOccurs="1" maxOccurs="1" />
        <xs:element name="StatusMapping" type="xs:int" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="RevocationComment" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element name="ParametersXML" type="JobParameters" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="JobParameters">
    <xs:sequence>
        <xs:element name="ReIssue" type="xs:unsignedInt" maxOccurs="1" minOccurs="0" />
    </xs:sequence>
</xs:complexType>

<xs:complexType name="ReplacementCardBlockType">
    <xs:all>
        <xs:element
name="OriginalSerialNumber" type="myidbase:String50" minOccurs="1" maxOccurs="1"/>
        <xs:element
name="OriginalDeviceType" type="myidbase:String50" minOccurs="1" maxOccurs="1"/>
        <xs:element name="StatusMapping" type="xs:int" minOccurs="0" maxOccurs="1"/>
    </xs:all>
</xs:complexType>

<xs:complexType name="PersonalAddressBlockType">
    <xs:sequence>
        <xs:element name="Address1" type="myidbase:String50" minOccurs="0"/>
        <xs:element name="Address2" type="myidbase:String50" minOccurs="0"/>
        <xs:element name="City" type="myidbase:String50" minOccurs="0"/>
        <xs:element name="StateZip" type="myidbase:String50" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="AuthenticationBlockType">
    <xs:sequence>
        <xs:element name="SecurityPhrase" minOccurs="0" maxOccurs="unbounded" >
            <xs:complexType>
                <xs:sequence>
                    <xs:element
name="Prompt" type="myidbase:NotEmptyString255" minOccurs="1" maxOccurs="1"/>
                    <xs:element
name="Answer" type="myidbase:EncryptedData" minOccurs="1" maxOccurs="1"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="AccountBlockType">
    <xs:sequence>
        <xs:element name="DN" type="myidbase:String1024" minOccurs="0"/>
        <xs:element name="AlternateDN" type="myidbase:String1024" minOccurs="0"/>
        <xs:element name="CN" type="myidbase:String255" minOccurs="0"/>
        <xs:element name="OU" type="myidbase:String1024" minOccurs="0"/>
        <xs:element name="UPN" type="myidbase:String255" minOccurs="0"/>
        <xs:element name="SAMAccountName" type="myidbase:String20" minOccurs="0"/>
        <xs:element
name="Domain" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
        <xs:element name="LogonName" type="myidbase:String255" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>

```

```

        <xs:element name="Roles" minOccurs="0" maxOccurs="1" type="RolesBlockType"/>
        <xs:element name="EntrustProfile" type="myidbase:String50" minOccurs="0"/>
        <xs:element
name="MaxRequestExpiryDate" type="xs:date" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="UserSID" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="RolesBlockType">
    <xs:sequence>
        <xs:element name="Role" minOccurs="0" maxOccurs="unbounded">
            <xs:complexType>
                <xs:sequence>
                    <xs:element name="Name" type="myidbase:String255" minOccurs="1"/>
                    <xs:element
name="Scope" type="RoleScope" minOccurs="0" maxOccurs="1"/>
                    <xs:element
name="LogonMechanism" type="RoleLogonMechanism" minOccurs="0" maxOccurs="1"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="PositionBlockType">
    <xs:sequence>
        <xs:element name="EmployeeAssociation" type="Association" minOccurs="0"/>
        <xs:element
name="EmployeeAffiliation" type="myidbase:String64" minOccurs="0"/>
        <xs:element name="Rank" type="Rank" minOccurs="0"/>
        <xs:element name="EmergencyRole" type="EmergencyRole" minOccurs="0"/>
        <xs:element name="Privilege" type="myidbase:String50" minOccurs="0"/>
        <xs:element name="ApplicantPosition" type="myidbase:String30" minOccurs="0"/>
        <xs:element name="ExtraInfo" type="myidbase:String80" minOccurs="0"/>
        <xs:element name="EEDEligible" type="EED" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="EEDIneligibleMessage" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
        <xs:element
name="DisplayCollectCardMessage" type="ColCardMess" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="BiometryBlockType">
    <xs:sequence>
        <xs:element name="HeightInches" type="myidbase:String8" minOccurs="0"/>
        <xs:element name="WeightLbs" type="myidbase:String8" minOccurs="0"/>
        <xs:element name="Gender" type="Gender" minOccurs="0"/>
        <xs:element name="EyeColor" type="EyeColor" minOccurs="0"/>
        <xs:element name="HairColor" type="HairColor" minOccurs="0"/>
        <xs:element name="Race" type="Race" minOccurs="0"/>
        <xs:element name="BioSample" minOccurs="0" type="BioSampleBlockType"/>
        <xs:element name="Signature" minOccurs="0">
            <xs:complexType>
                <xs:group ref="EncodedData"/>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

```

```
<xs:complexType name="BioSampleBlockType">
  <xs:all>
    <xs:element name="R_Little" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="R_Ring" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="R_Middle" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="R_Index" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="R_Thumb" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="L_Little" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="L_Ring" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="L_Middle" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="L_Index" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="L_Thumb" minOccurs="0">
      <xs:complexType>
        <xs:group ref="BioFingerSample"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="EFT" minOccurs="0">
      <xs:complexType>
        <xs:group ref="EncodedData"/>
      </xs:complexType>
    </xs:element>
    <xs:element name="FaceScan" minOccurs="0">
      <xs:complexType>
```

```

        <xs:group ref="EncodedData"/>
    </xs:complexType>
</xs:element>
<xs:element name="IrisScan" minOccurs="0">
    <xs:complexType>
        <xs:group ref="EncodedData"/>
    </xs:complexType>
</xs:element>
</xs:all>
</xs:complexType>

<xs:group name="BioFingerSample">
    <xs:sequence>
        <xs:choice>
            <xs:sequence>
                <xs:group ref="EncodedData"/>
                <xs:element
name="RolledPrint" type="myidbase:YesNo" maxOccurs="1" minOccurs="0"/>
            </xs:sequence>
            <xs:element
name="ReasonMissing" type="MissingFingerReason" minOccurs="0" maxOccurs="1"/>
        </xs:choice>
    </xs:sequence>
</xs:group>

<xs:group name="EncodedData">
    <xs:sequence>
        <xs:element name="Encoding" type="FileEncoding" maxOccurs="1" minOccurs="1"/>
        <xs:element
name="Data" type="myidbase:StringBase64" maxOccurs="1" minOccurs="1"/>
        <xs:element name="DateTaken" type="xs:dateTime" maxOccurs="1" minOccurs="0"/>
        <xs:element
name="Source" type="myidbase:String50" maxOccurs="1" minOccurs="0"/>
    </xs:sequence>
</xs:group>

<xs:complexType name="IdentityDocumentsBlockType">
    <xs:sequence>
        <xs:element name="IdentityDoc1" minOccurs="0">
            <xs:complexType>
                <xs:sequence>
                    <xs:element name="Image">
                        <xs:complexType>
                            <xs:group ref="EncodedData"/>
                        </xs:complexType>
                    </xs:element>
                    <xs:element name="Title" type="IDDocName1"/>
                    <xs:element name="IssuedBy" type="myidbase:String80"/>
                    <xs:element name="Number" type="myidbase:String20"/>
                    <xs:element name="Expiry" type="xs:date"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
        <xs:element name="IdentityDoc2" minOccurs="0">
            <xs:complexType>
                <xs:sequence>
                    <xs:element name="Image">
                        <xs:complexType>
                            <xs:group ref="EncodedData"/>
                        </xs:complexType>
                    </xs:element>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

```

```

        </xs:complexType>
    </xs:element>
    <xs:element name="Title" type="IDDocName2"/>
    <xs:element name="IssuedBy" type="myidbase:String80"/>
    <xs:element name="Number" type="myidbase:String20"/>
    <xs:element name="Expiry" type="xs:date"/>
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="SPF10" minOccurs="0">
    <xs:complexType>
        <xs:sequence>
            <xs:element name="Image">
                <xs:complexType>
                    <xs:group ref="EncodedData"/>
                </xs:complexType>
            </xs:element>
            <xs:element name="Title"/>
            <xs:element name="IssuedBy"/>
            <xs:element name="Number"/>
            <xs:element name="Expiry"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>

<xs:simpleType name="IDDocName1">
    <xs:restriction base="xs:string">
        <!-- the following items are allowable under FIPS201-2 -->
        <xs:enumeration value="U.S. Passport"/>
        <xs:enumeration value="Foreign Passport"/>
        <xs:enumeration value="Alien Regn Receipt Card"/>
        <xs:enumeration value="Employment Authorization"/>
        <xs:enumeration value="Drivers License"/>
        <xs:enumeration value="U.S. Military Card"/>
        <xs:enumeration value="U.S. Military dependent ID Card"/>
        <xs:enumeration value="PIV Card"/>
        <!-- the following items are legacy items which need to be retained to support
existing functionality -->
        <xs:enumeration value="Cert. of U.S. Citizenship"/>
        <xs:enumeration value="Cert. of Naturalization"/>
        <xs:enumeration value="Temporary Card"/>
        <xs:enumeration value="Reentry Permit"/>
        <xs:enumeration value="Refugee Travel Document"/>
        <xs:enumeration value="Photo ID Card"/>
        <xs:enumeration value="School ID Card"/>
        <xs:enumeration value="Voters Regn Card"/>
        <xs:enumeration value="Merchant Mariner Card"/>
        <xs:enumeration value="Native American Tribal"/>
        <xs:enumeration value="Canadian Drivers License"/>
        <xs:enumeration value="School Report"/>
        <xs:enumeration value="Hospital Record"/>
        <xs:enumeration value="Nursery Record"/>
        <xs:enumeration value="U.S. Social Security"/>
        <xs:enumeration value="Cert. of Birth Abroad"/>
        <xs:enumeration value="Birth Certificate"/>
        <xs:enumeration value="U.S. Citizen ID"/>
    </xs:restriction>

```

```

</xs:simpleType>

<xs:simpleType name="IDDocName2">
  <xs:restriction base="xs:string">
    <!-- the following items are allowable under FIPS201-2 -->
    <xs:enumeration value="U.S. Passport"/>
    <xs:enumeration value="Cert. of U.S. Citizenship"/>
    <xs:enumeration value="Cert. of Naturalization"/>
    <xs:enumeration value="Foreign Passport"/>
    <xs:enumeration value="Alien Regn Receipt Card"/>
    <xs:enumeration value="Temporary Card"/>
    <xs:enumeration value="Reentry Permit"/>
    <xs:enumeration value="Refugee Travel Document"/>
    <xs:enumeration value="Employment Authorization"/>
    <xs:enumeration value="Drivers License"/>
    <xs:enumeration value="Photo ID Card"/>
    <xs:enumeration value="Voters Regn Card"/>
    <xs:enumeration value="U.S. Military Card"/>
    <xs:enumeration value="Merchant Mariner Card"/>
    <xs:enumeration value="Native American Tribal"/>
    <xs:enumeration value="Canadian Drivers License"/>
    <xs:enumeration value="U.S. Social Security"/>
    <xs:enumeration value="Cert. of Birth Abroad"/>
    <xs:enumeration value="Birth Certificate"/>
    <xs:enumeration value="U.S. Citizen ID"/>
    <xs:enumeration value="U.S. Resident Citizen Card (I-179)"/>
    <xs:enumeration value="Employment Auth Card (I-688A)"/>
    <xs:enumeration value="Employment Auth Doc (DHS)"/>
    <xs:enumeration value="Employment Auth Doc (I-688B)"/>
    <!-- the following items are legacy items which need to be retained to support
existing functionality -->
    <xs:enumeration value="School ID Card"/>
    <xs:enumeration value="School Report"/>
    <xs:enumeration value="Hospital Record"/>
    <xs:enumeration value="Nursery Record"/>
  </xs:restriction>
</xs:simpleType>

<xs:complexType name="NACIStatusBlockType">
  <xs:sequence>
    <xs:element name="NACCaseNumber" type="xs:unsignedShort" minOccurs="0"/>
    <xs:element name="NACICaseNumber" type="xs:unsignedShort" minOccurs="0"/>
    <xs:element maxOccurs="unbounded" name="Check">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Type" type="myidbase:String20"/>
          <xs:element name="Status" type="NACState"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element
name="CardIssuanceApproved" type="myidbase:YesNoOneZero" minOccurs="0"/>
    <xs:element name="Comments" type="myidbase:String255" minOccurs="0"/>
    <xs:element
name="VettingDate" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="ActionsBlockType">

```

```

        <xs:sequence>
            <xs:element
name="ApplicantAction" type="UserAction" minOccurs="0" maxOccurs="1"/>
            <xs:element
name="CertSerialNumber" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
            <xs:element
name="CertPolicyName" type="myidbase:String50" minOccurs="0" maxOccurs="1"/>
            <xs:element
name="StatusMappingID" type="xs:unsignedInt" minOccurs="0" maxOccurs="1"/>
            <xs:element
name="RevocationComment" type="myidbase:String255" minOccurs="0" maxOccurs="1"/>
            <xs:element name="Device" minOccurs="0">
                <xs:complexType>
                    <xs:sequence>
                        <xs:element
name="DeviceIdentifier" minOccurs="0" maxOccurs="unbounded" type
="DeviceIdentifierBlockType"/>
                        <xs:element
name="ProcessStatus" type="myidbase:String50" minOccurs="0" maxOccurs="1" />
                    </xs:sequence>
                </xs:complexType>
            </xs:element>
            <xs:element
name="Job" type="xs:unsignedInt" minOccurs="0" maxOccurs="unbounded" />
        </xs:sequence>
    </xs:complexType>

    <xs:complexType name="DeviceIdentifierBlockType">
        <xs:sequence>
            <xs:element name="SerialNumber" type="myidbase:String50" minOccurs="1"/>
            <xs:element name="SerialNumberField" type="myidbase:String50" minOccurs="0"/>
        </xs:sequence>
    </xs:complexType>

    <!-- simple/base PIV types -->
    <xs:simpleType name="RenewalString">
        <xs:restriction base="xs:string">
            <xs:enumeration value="true"/>
            <xs:enumeration value="false"/>
        </xs:restriction>
    </xs:simpleType>

    <xs:simpleType name="CitizenshipString">
        <xs:restriction base="xs:string">
            <xs:enumeration value="US"/>
            <xs:enumeration value="Non US"/>
            <xs:enumeration value="PR"/>
        </xs:restriction>
    </xs:simpleType>

    <xs:simpleType name="ExportRestrictionsString">
        <xs:restriction base="xs:string">
            <xs:enumeration value="EXP"/>
            <xs:enumeration value=""/>
        </xs:restriction>
    </xs:simpleType>

    <xs:simpleType name="RoleScope">
        <xs:restriction base="xs:string">
            <xs:enumeration value="None"/>

```

```
<xs:enumeration value="Self"/>
<xs:enumeration value="Department"/>
<xs:enumeration value="Division"/>
<xs:enumeration value="All"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="RoleLogonMechanism">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Password"/>
    <xs:enumeration value="Card"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="Association">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Employee"/>
    <xs:enumeration value="Civil Worker"/>
    <xs:enumeration value="Executive"/>
    <xs:enumeration value="Uniformed"/>
    <xs:enumeration value="Contractor"/>
    <xs:enumeration value="Affiliate"/>
    <xs:enumeration value="Beneficiary"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="Rank">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Civilian"/>
    <xs:enumeration value="E-1"/>
    <xs:enumeration value="E-2"/>
    <xs:enumeration value="E-3"/>
    <xs:enumeration value="E-4"/>
    <xs:enumeration value="E-5"/>
    <xs:enumeration value="E-6"/>
    <xs:enumeration value="E-7"/>
    <xs:enumeration value="E-8"/>
    <xs:enumeration value="E-9"/>
    <xs:enumeration value="ES-1"/>
    <xs:enumeration value="ES-2"/>
    <xs:enumeration value="ES-3"/>
    <xs:enumeration value="ES-4"/>
    <xs:enumeration value="ES-5"/>
    <xs:enumeration value="ES-6"/>
    <xs:enumeration value="GS-1"/>
    <xs:enumeration value="GS-10"/>
    <xs:enumeration value="GS-11"/>
    <xs:enumeration value="GS-12"/>
    <xs:enumeration value="GS-13"/>
    <xs:enumeration value="GS-14"/>
    <xs:enumeration value="GS-15"/>
    <xs:enumeration value="GS-1"/>
    <xs:enumeration value="GS-2"/>
    <xs:enumeration value="GS-3"/>
    <xs:enumeration value="GS-4"/>
    <xs:enumeration value="GS-5"/>
    <xs:enumeration value="GS-6"/>
    <xs:enumeration value="GS-7"/>
    <xs:enumeration value="GS-8"/>
  </xs:restriction>
</xs:simpleType>
```

```
<xs:enumeration value="GS-9"/>
<xs:enumeration value="0-10"/>
<xs:enumeration value="0-11"/>
<xs:enumeration value="0-1"/>
<xs:enumeration value="0-2"/>
<xs:enumeration value="0-3"/>
<xs:enumeration value="0-4"/>
<xs:enumeration value="0-5"/>
<xs:enumeration value="0-6"/>
<xs:enumeration value="0-7"/>
<xs:enumeration value="0-8"/>
<xs:enumeration value="0-9"/>
<xs:enumeration value="W-1"/>
<xs:enumeration value="W-2"/>
<xs:enumeration value="W-3"/>
<xs:enumeration value="W-4"/>
<xs:enumeration value="W-5"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="EmergencyRole">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Law Enforcement"/>
    <xs:enumeration value="Paramedic"/>
    <xs:enumeration value="Doctor"/>
    <xs:enumeration value="Firefighter"/>
    <xs:enumeration value="Bomb Disposal"/>
    <xs:enumeration value="Biohazard"/>
    <xs:enumeration value="None"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="Gender">
  <xs:restriction base="xs:string">
    <xs:enumeration value="F"/>
    <xs:enumeration value="M"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="EyeColor">
  <xs:restriction base="xs:string">
    <xs:enumeration value="BLK"/>
    <xs:enumeration value="BLU"/>
    <xs:enumeration value="BRO"/>
    <xs:enumeration value="GRY"/>
    <xs:enumeration value="GRN"/>
    <xs:enumeration value="HAZ"/>
    <xs:enumeration value="MAR"/>
    <xs:enumeration value="PNK"/>
    <xs:enumeration value="XXX"/>
    <xs:enumeration value="MUL"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="HairColor">
  <xs:restriction base="xs:string">
    <xs:enumeration value="XXX"/>
    <xs:enumeration value="BAL"/>
    <xs:enumeration value="BLK"/>
```

```
<xs:enumeration value="BLN"/>
<xs:enumeration value="BLU"/>
<xs:enumeration value="BRO"/>
<xs:enumeration value="GRY"/>
<xs:enumeration value="GRN"/>
<xs:enumeration value="ONG"/>
<xs:enumeration value="PNK"/>
<xs:enumeration value="PLE"/>
<xs:enumeration value="RED"/>
<xs:enumeration value="SDY"/>
<xs:enumeration value="STR"/>
<xs:enumeration value="WHI"/>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="Race">
  <xs:restriction base="xs:string">
    <xs:enumeration value="A"/>
    <xs:enumeration value="B"/>
    <xs:enumeration value="I"/>
    <xs:enumeration value="W"/>
    <xs:enumeration value="O"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="MissingFingerReason">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unprintable"/>
    <xs:enumeration value="Amputated"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="NACState">
  <xs:restriction base="xs:string">
    <xs:enumeration value="NR"/>
    <xs:enumeration value="WR"/>
    <xs:enumeration value="AS"/>
    <xs:enumeration value="AP"/>
    <xs:enumeration value="RJ"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="UserAction">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Disable"/>
    <xs:enumeration value="Remove"/>
    <xs:enumeration value="CancelDevices"/>
    <xs:enumeration value="CancelDevice"/>
    <xs:enumeration value="CancelJob"/>
    <xs:enumeration value="CancelAllJobs"/>
    <xs:enumeration value="RenewCertificate"/>
  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="FileEncoding">
  <xs:restriction base="xs:string">
    <xs:enumeration value="jpg"/>
    <xs:enumeration value="gif"/>
    <xs:enumeration value="png"/>
  </xs:restriction>
</xs:simpleType>
```

```

        <xs:enumeration value="bmp"/>
        <xs:enumeration value="378"/>
        <xs:enumeration value="385"/>
        <xs:enumeration value="19794"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="ApplicantStatus">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Sponsored"/>
        <xs:enumeration value="EnrollmentBegun"/>
        <xs:enumeration value="EnrollmentComplete"/>
        <xs:enumeration value="Vetting"/>
        <xs:enumeration value="Escalated"/>
        <xs:enumeration value="Approved"/>
        <xs:enumeration value="CardRequested"/>
        <xs:enumeration value="CardActivated"/>
        <xs:enumeration value="Rejected"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="AgencyCategory">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Federal"/>
        <xs:enumeration value="State"/>
        <xs:enumeration value="Commercial"/>
        <xs:enumeration value="Foreign"/>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="AgencyType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Agency"/>
        <xs:enumeration value="State"/>
        <xs:enumeration value="Company"/>
        <xs:enumeration value="Country"/>
    </xs:restriction>
</xs:simpleType>

<xs:complexType name="AdminGroupsBlockType">
    <xs:sequence>
        <xs:element name="AdminGroup" minOccurs="0" maxOccurs="unbounded">
            <xs:complexType>
                <xs:sequence>
                    <xs:element name="Name" minOccurs="1" type="myidbase:String100" />
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<!-- Custom simple PIV Types -->
<xs:simpleType name="EED">
    <xs:restriction base="xs:string">
        <xs:enumeration value="0"/>
        <xs:enumeration value="1"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="ColCardMess">

```

```
<xs:restriction base="xs:string">
  <xs:enumeration value="0"/>
  <xs:enumeration value="1"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```

## 9.8 PivCardRequest schema

The `PivCardRequest` schema is used to create XML files containing PIV user data.

For information about the elements of this schema, see section [7.4, PivCardRequest structure](#).

```
<?xml version="1.0"?>
<xs:schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  targetNamespace="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  xmlns="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  id="PivCardRequest"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
  elementFormDefault="qualified" attributeFormDefault="qualified"
>
  <xs:include schemaLocation="PIVSchemaTypes.xsd" />
  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:element name="PivCardRequest" msdata:IsDataSet="true" msdata:Locale="en-GB"
    msdata:EnforceConstraints="false">
    <xs:complexType>
      <xs:sequence>
        <xs:element
          name="Parameters" minOccurs="0" maxOccurs="1" type="ParametersBlockType"/>
        <xs:element
          name="Agency" minOccurs="0" maxOccurs="1" type="AgencyBlockType"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <xs:complexType name="AgencyBlockType">
    <xs:sequence>
      <xs:element name="DeptCode" type="myidbase:String6" minOccurs="1"/>
      <xs:element name="AgencyCode" type="myidbase:String4" minOccurs="1"/>
      <xs:element name="FacilityCode" type="myidbase:String4" minOccurs="1"/>
      <xs:element name="AgencyName" type="myidbase:String100" minOccurs="1"/>
      <xs:element name="FacilityName" type="myidbase:String80" minOccurs="0"/>
      <xs:element name="DUNS" type="myidbase:Int9" minOccurs="1"/>
      <xs:element name="OC" type="myidbase:Int1" minOccurs="1"/>
      <xs:element name="OI" type="myidbase:Int4" minOccurs="1"/>
      <xs:element name="Department" type="myidbase:String64" minOccurs="0"/>
      <xs:element name="BaseDN" type="myidbase:String1024" minOccurs="0"/>
      <xs:element name="Parent" type="myidbase:String80" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>

  <xs:element name="AgencyAddress" minOccurs="0" maxOccurs="1" type="AgencyAddressBlockType">
    <xs:element name="AdditionalAgencyFields" minOccurs="0" maxOccurs="1">
      <xs:complexType mixed="true">
        <xs:sequence>
          <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="Applicant" minOccurs="0" maxOccurs="1" type="ApplicantBlockType"/>
  </xs:sequence>
</xs:complexType>

  <xs:complexType name="ApplicantBlockType">
```

```

<xs:sequence>
  <xs:element name="Personal" type="PersonalBlockType"/>
  <xs:element
name="Authentication" type="AuthenticationBlockType" minOccurs="0" maxOccurs="1" />
  <xs:element name="Card" minOccurs="0" maxOccurs="1" type="CardBlockType"/>
  <xs:element name="Account" minOccurs="0" type="AccountBlockType"/>
  <xs:element name="Position" minOccurs="0" type="PositionBlockType"/>
  <xs:element name="Sponsor" minOccurs="1" maxOccurs="1" type="SponsorBlockType"/>
  <xs:element name="Biometry" minOccurs="0" type="BiometryBlockType"/>
  <xs:element name="IdentityDocs" minOccurs="0" type="IdentityDocumentsBlockType"/>
  <xs:element name="NACI" minOccurs="0" type="NACIStatusBlockType"/>
  <xs:element name="Photo" minOccurs="0">
    <xs:complexType>
      <xs:group ref="EncodedData"/>
    </xs:complexType>
  </xs:element>
  <xs:element name="System" minOccurs="0" maxOccurs="1" type="SystemBlockType"/>
  <xs:element
name="AdminGroups" minOccurs="0" maxOccurs="1" type="AdminGroupsBlockType" />
  <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
    <xs:complexType mixed="true">
      <xs:sequence>
        <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="Actions" minOccurs="0" maxOccurs="1" type="ActionsBlockType"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="SponsorBlockType">
  <xs:sequence>
    <xs:element
name="SponsorName" type="myidbase:String80" minOccurs="1" maxOccurs="1"/>
    <xs:element
name="SponsorPosition" type="myidbase:String30" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="SponsorAgency" type="myidbase:String80" minOccurs="1" maxOccurs="1"/>
    <xs:element
name="SponsorEmail" type="myidbase:String120" minOccurs="0" maxOccurs="1"/>
    <xs:element
name="SponsorPhoneNumber" type="myidbase:String30" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="SystemBlockType">
  <xs:sequence>
    <xs:element name="GUID" type="myidbase:String50" minOccurs="1"/>
    <xs:element name="CredNo" type="myidbase:String8" minOccurs="1"/>
    <xs:element name="CS" type="xs:unsignedInt" minOccurs="0"/>
    <xs:element name="POA" type="xs:unsignedInt" minOccurs="0"/>
    <xs:element name="ICI" type="xs:unsignedInt" minOccurs="1"/>
    <xs:element name="UserStatus" type="myidbase:String50" minOccurs="0"/>
    <xs:element name="IssuanceNotifyURL" type="myidbase:String255" minOccurs="0"/>
    <xs:element name="CancelNotifyURL" type="myidbase:String255" minOccurs="0"/>
    <xs:element name="CMSIssuanceNotifyURL" type="myidbase:String255" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
</xs:schema>

```

## 9.9 PivApplicantUpdate schema

The `PivApplicantUpdate` schema is used to create XML files containing user data when you are updating an existing PIV user.

For information about the elements of this schema, see section [7.5, \*PivApplicantUpdate structure\*](#).

```
<?xml version="1.0"?>
<xs:schema
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:myidbase="http://www.intercede.com/CommonTypes"
  targetNamespace="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  xmlns="http://www.intercede.com/MyIDPIVSchema/PivCardRequest"
  id="PivApplicantUpdate"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
  elementFormDefault="qualified" attributeFormDefault="qualified"
>
  <xs:include schemaLocation="PIVSchemaTypes.xsd" />
  <xs:import
    namespace="http://www.intercede.com/CommonTypes" schemaLocation="MyIDBaseTypes.xsd"/>

  <xs:element name="PivCardRequest" msdata:IsDataSet="true" msdata:Locale="en-GB"
    msdata:EnforceConstraints="false">
    <xs:complexType>
      <xs:sequence>
        <xs:element
          name="Parameters" minOccurs="0" maxOccurs="1" type="ParametersBlockType"/>
        <xs:element
          name="Agency" minOccurs="0" maxOccurs="unbounded" type="AgencyBlockType"/>
        <xs:element
          name="Applicant" minOccurs="0" maxOccurs="unbounded" type="ApplicantBlockType"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <xs:complexType name="AgencyBlockType">
    <xs:sequence>
      <xs:element name="DeptCode" type="myidbase:String6" minOccurs="1"/>
      <xs:element name="AgencyCode" type="myidbase:String4" minOccurs="1"/>
      <xs:element name="FacilityCode" type="myidbase:String4" minOccurs="1"/>
      <xs:element name="AgencyName" type="myidbase:String100" minOccurs="1"/>
      <xs:element name="FacilityName" type="myidbase:String80" minOccurs="0"/>
      <xs:element name="DUNS" type="myidbase:Int9" minOccurs="1"/>
      <xs:element name="OC" type="myidbase:Int1" minOccurs="1"/>
      <xs:element name="OI" type="myidbase:Int4" minOccurs="1"/>
      <xs:element name="Department" type="myidbase:String64" minOccurs="0"/>
      <xs:element name="BaseDN" type="myidbase:String1024" minOccurs="0"/>
      <xs:element name="Parent" type="myidbase:String80" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="ApplicantBlockType">
    <xs:sequence>
      <xs:element name="AgencyAddress" minOccurs="0" maxOccurs="1" type="AgencyAddressBlockType"/>
      <xs:element name="AdditionalAgencyFields" minOccurs="0" maxOccurs="1">
        <xs:complexType mixed="true">
          <xs:sequence>
            <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:schema>
```

```

    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="ApplicantBlockType">
    <xs:sequence>
      <xs:element name="Personal" minOccurs="0" type="PersonalBlockType"/>
      <xs:element
name="Authentication" minOccurs="0" maxOccurs="1" type="AuthenticationBlockType"/>
      <xs:element name="Card" minOccurs="0" maxOccurs="1" type="CardBlockType"/>
      <xs:element name="Account" minOccurs="0" type="AccountBlockType"/>
      <xs:element name="Position" minOccurs="0" type="PositionBlockType"/>
      <xs:element name="Sponsor" minOccurs="0" maxOccurs="1" type="SponsorBlockType"/>
      <xs:element name="Biometry" minOccurs="0" type="BiometryBlockType"/>
      <xs:element name="IdentityDocs" minOccurs="0" type="IdentityDocumentsBlockType"/>
      <xs:element name="NACI" minOccurs="0" type="NACIStatusBlockType"/>
      <xs:element name="Photo" minOccurs="0">
        <xs:complexType>
          <xs:group ref="EncodedData"/>
        </xs:complexType>
      </xs:element>
      <xs:element name="System" minOccurs="0" type="SystemBlockType"/>
      <xs:element
name="AdminGroups" minOccurs="0" maxOccurs="1" type="AdminGroupsBlockType" />
      <xs:element name="AdditionalFields" minOccurs="0" maxOccurs="1">
        <xs:complexType mixed="true">
          <xs:sequence>
            <xs:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="Actions" minOccurs="0" maxOccurs="1" type="ActionsBlockType"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="SponsorBlockType">
    <xs:sequence>
      <xs:element
name="SponsorName" type="myidbase:String80" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="SponsorPosition" type="myidbase:String30" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="SponsorAgency" type="myidbase:String80" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="SponsorEmail" type="myidbase:String120" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="SponsorPhoneNumber" type="myidbase:String30" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name="SystemBlockType">
    <xs:sequence>
      <xs:element name="GUID" type="myidbase:String50" minOccurs="0"/>
      <xs:element name="CredNo" type="myidbase:String8" minOccurs="0"/>
      <xs:element name="CS" type="xs:unsignedInt" minOccurs="0"/>
      <xs:element name="POA" type="xs:unsignedInt" minOccurs="0"/>
      <xs:element name="ICI" type="xs:unsignedInt" minOccurs="0"/>
      <xs:element name="UserStatus" type="myidbase:String50" minOccurs="0"/>
      <xs:element name="IssuanceNotifyURL" type="myidbase:String255" minOccurs="0"/>
      <xs:element name="CancelNotifyURL" type="myidbase:String255" minOccurs="0"/>
      <xs:element name="CMSIssuanceNotifyURL" type="myidbase:String255" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>

```

```
</xs:sequence>  
</xs:complexType>  
  
</xs:schema>
```

## 9.10 PivImportResponse schema

This schema is used by the import service to pass back information about the user import. For information about the elements of this schema, see section [7.6, PivImportResponse structure](#).

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema
id="PivImportResponse" targetNamespace
="http://www.intercede.com/MyIDPIVSchema/PivImportResponse"
xmlns:mstns="http://www.intercede.com/MyIDPIVSchema/PivImportResponse"
attributeFormDefault="unqualified" elementFormDefault="qualified"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="PivImportResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Agency" minOccurs="0" maxOccurs="unbounded">
          <xs:complexType>
            <xs:sequence>
              <xs:element
name="AgencyName" type="mstns:String80" minOccurs="1" maxOccurs="1"/>
              <xs:element
name="AgencyCode" type="mstns:String4" minOccurs="1" maxOccurs="1" />
              <xs:element
name="Result" type="mstns:ActionStatus" minOccurs="1" maxOccurs="1" />
              <xs:element
name="Applicant" minOccurs="0" maxOccurs="unbounded" type="mstns:ApplicantType"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element
name="Applicant" minOccurs="0" maxOccurs="unbounded" type="mstns:ApplicantType"/>
        <xs:element name="error" minOccurs="0" maxOccurs="1">
          <xs:complexType mixed="true">
            <xs:sequence>
              <xs:any
minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ApplicantType">
    <xs:sequence>
      <xs:element
name="FirstName" type="mstns:String64" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="LastName" type="mstns:String64" minOccurs="1" maxOccurs="1"/>
      <xs:element name="EmployeeID" type="mstns:Int50" minOccurs="1" maxOccurs="1"/>
      <xs:element name="CardRequest" type="xs:int" minOccurs="1" maxOccurs="1" />
      <xs:element name="CardUpdate" type="xs:int" minOccurs="1" maxOccurs="1" />
      <xs:element
name="CardRequestFailReason" type="mstns:String64" minOccurs="0" maxOccurs="1"/>
      <xs:element
name="Result" type="mstns:ActionStatus" minOccurs="1" maxOccurs="1"/>
      <xs:element
name="Reason" type="xs:string" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
  </xs:complexType>

```

```
<xs:simpleType name="String50">
  <xs:restriction base="xs:string">
    <xs:maxLength value="50" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String80">
  <xs:restriction base="xs:string">
    <xs:maxLength value="80" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String64">
  <xs:restriction base="xs:string">
    <xs:maxLength value="64" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="String4">
  <xs:restriction base="xs:string">
    <xs:maxLength value="4" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Int50">
  <xs:restriction base="xs:string">
    <xs:maxLength value="50" />
    <xs:pattern value="[0-9]*" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="ActionStatus">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Added"/>
    <xs:enumeration value="Created"/>
    <xs:enumeration value="Already Exists"/>
    <xs:enumeration value="Failed"/>
    <xs:enumeration value="Removed"/>
    <xs:enumeration value="License Limit"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>
```

## 10 Sample files

This section contains sample import and response files for both CMS import and PIV:

- A sample using CMSCardRequest.  
See section [10.1, CMS sample](#).
- A sample using PivCardRequest.  
See section [10.2, PIV sample](#).

## 10.1 CMS sample

Import file:

```
<?xml version="1.0" encoding="utf-8"?>
<CMSCardRequest xmlns="http://www.intercede.com/MyIDSchema/CMSCardRequest">
  <Parameters>
    <SourceID>CertServ</SourceID>
    <IssueDate>2014-08-27</IssueDate>
    <GenerateUserDN>0</GenerateUserDN>
    <ActionOnDuplicate>REPLACE</ActionOnDuplicate>
    <RolesActionOnDuplicate>REPLACE</RolesActionOnDuplicate>
    <DeleteMissingUsers>0</DeleteMissingUsers>
    <PushToLDAP>0</PushToLDAP>
    <CreateUnknownGroups>1</CreateUnknownGroups>
    <AuditAll>1</AuditAll>
    <DataType>CMSRequestCard</DataType>
  </Parameters>
  <Group>
    <Name>DivisionRoles</Name>
    <User>
      <Personal>
        <FirstName>Buck</FirstName>
        <LastName>High</LastName>
        <Initial />
        <Title />
        <Email>Buck.High@domain19.local</Email>
        <PhoneExt>112</PhoneExt>
        <MobileNumber>07891231111</MobileNumber>
        <PhoneNumber>00 1122 111111</PhoneNumber>
        <EmployeeID>2014001</EmployeeID>
        <OptionalLine1>ol1</OptionalLine1>
        <OptionalLine2>ol2</OptionalLine2>
        <OptionalLine3>ol3</OptionalLine3>
        <OptionalLine4>ol4</OptionalLine4>
      </Personal>
      <Account>
        <DN>CN=Buck High,OU=Finance,OU=Enterprise,DC=domain19,DC=local</DN>
        <CN>Buck High</CN>
        <OU>OU=Finance,OU=Enterprise,DC=domain19,DC=local</OU>
        <UPN>Buck High@domain19.local</UPN>
        <SAMAccountName>2014001</SAMAccountName>
        <LogonName>2014001</LogonName>
        <Roles>
          <Role>
            <Name>Cardholder</Name>
            <Scope>Self</Scope>
            <LogonMechanism>Card</LogonMechanism>
          </Role>
          <Role>
            <Name>Foreign</Name>
            <Scope>All</Scope>
            <LogonMechanism>Card</LogonMechanism>
          </Role>
        </Roles>
        <EntrustProfile />
      </Account>
      <AdditionalFields></AdditionalFields>
    </User>
  </Group>
</CMSCardRequest>
```

```
</Group>  
</CMSCardRequest>
```

Response:

```
<?xml version="1.0" encoding="utf-16"?><CMSImportResponse  
xmlns="http://www.intercede.com/MyIDSchema/CMSImportResponse"><Group><Name>DivisionRoles  
</Name><Result>Created</Result><User><FirstName>Buck</FirstName><LastName>High  
</LastName><EmployeeID>2014001</EmployeeID><LogonName>2014001</LogonName><CardRequest>0  
</CardRequest><UnlockCardRequest>0</UnlockCardRequest><Result>Added  
</Result><Reason></Reason></User></Group></CMSImportResponse>
```

## 10.2 PIV sample

**Note:** All Base 64-encoded binary data has been truncated in this example – replace the samples with your own data.

Import file:

```
<?xml version="1.0" encoding="utf-8"?>
<PivCardRequest xmlns="http://www.intercede.com/MyIDPIVSchema/PivCardRequest">
  <Parameters>
    <SourceID>Station1</SourceID>
    <IssueDate>2006-08-07</IssueDate>
    <GenerateUserDN>0</GenerateUserDN>
    <ActionOnDuplicate>REPLACE</ActionOnDuplicate>
    <RolesActionOnDuplicate>REPLACE</RolesActionOnDuplicate>
    <DeleteMissingUsers>0</DeleteMissingUsers>
    <PushToLDAP>0</PushToLDAP>
    <CreateUnknownGroups>1</CreateUnknownGroups>
    <AuditAll>1</AuditAll>
    <DataType>PIV</DataType>
  </Parameters>
  <Agency>
    <DeptCode>000000</DeptCode>
    <AgencyCode>0001</AgencyCode>
    <FacilityCode>0</FacilityCode>
    <AgencyName>Department of Treasury</AgencyName>
    <FacilityName />
    <DUNS>0</DUNS>
    <OC>1</OC>
    <OI>1234</OI>
    <Department>Root</Department>
    <BaseDN>OU=Department of Treasury,OU=PIV,DC=domain19,DC=local</BaseDN>
    <Parent>Root</Parent>
    <AgencyAddress>
      <Address1>The White House</Address1>
      <Address2>1600 Pennsylvania Avenue NW</Address2>
      <City>Washington</City>
      <State>DC</State>
      <Zip>20500</Zip>
      <PhoneNumber>202-123-4567</PhoneNumber>
    </AgencyAddress>
    <Applicant>
      <Personal>
        <FirstName>David</FirstName>
        <LastName>Balsam</LastName>
        <NickName />
        <MiddleName />
        <Title>Mr</Title>
        <Email>David.Balsam@domain19.local</Email>
        <Fax>202-623-4567</Fax>
        <Cell>0412345678</Cell>
        <Phone>202-523-4567</Phone>
        <EmployeeID>19760223</EmployeeID>
        <Address>
          <Address1>28A Park Road</Address1>
          <Address2>Sunnydale Heights</Address2>
          <City>Washington</City>
          <StateZip>DC 20223</StateZip>
        </Address>
      </Personal>
    </Applicant>
  </Agency>
</PivCardRequest>
```

```

        <BirthDate>1976-02-23</BirthDate>
    </Personal>
    <Card>
        <CardProfile />
        <Renewal>false</Renewal>
        <CardRequestedBy />
    </Card>
    <Account>
        <DN>CN=David Balsam,OU=Department of
Treasury,OU=PIV,DC=domain19,DC=local</DN>
        <AlternateDN>CN=David Balsam,OU=Department of
Treasury,OU=PIV,DC=domain19,DC=local</AlternateDN>
        <CN>David Balsam</CN>
        <OU>OU=Department of Treasury,OU=PIV,DC=domain19,DC=local</OU>
        <UPN>David Balsam@domain19.local</UPN>
        <SAMAccountName>David Balsam</SAMAccountName>
        <LogonName>David Balsam</LogonName>
        <Roles>
            <Role>
                <Name>Applicant</Name>
                <Scope>Self</Scope>
                <LogonMechanism>Card</LogonMechanism>
            </Role>
        </Roles>
    </Account>
    <Position>
        <EmployeeAssociation>Uniformed</EmployeeAssociation>
        <EmployeeAffiliation>Civilian</EmployeeAffiliation>
        <Rank>ES-2</Rank>
        <EmergencyRole>None</EmergencyRole>
        <Privilege />
        <ApplicantPosition>Office Manager</ApplicantPosition>
        <ExtraInfo />
    </Position>
    <Sponsor>
        <SponsorName>PIV Administrator</SponsorName>
        <SponsorPosition>PIV Administrator</SponsorPosition>
        <SponsorAgency>Department of Administration</SponsorAgency>
        <SponsorEmail>sponsor@myid.com</SponsorEmail>
        <SponsorPhoneNumber />
    </Sponsor>
    <Biometry>
        <HeightInches>72</HeightInches>
        <WeightLbs>160</WeightLbs>
        <Gender>M</Gender>
        <EyeColor>BRO</EyeColor>
        <HairColor>BLN</HairColor>
        <Race>W</Race>
        <BioSample>
            <R_Index>
                <Encoding>378</Encoding>
                <Data>Rk1SAC...</Data>
            </R_Index>
            <L_Index>
                <Encoding>378</Encoding>
                <Data>Rk1SAC...</Data>
            </L_Index>
            <FaceScan>
                <Encoding>385</Encoding>
            </FaceScan>
        </BioSample>
    </Biometry>

```

```

        <Data>RkFDadDe...</Data>
    </FaceScan>
    <IrisScan>
        <Encoding>385</Encoding>
        <Data>SULSRkFDAD...</Data>
    </IrisScan>
</BioSample>
<Signature>
    <Encoding>jpg</Encoding>
    <Data>/9j/4AAQ...</Data>
</Signature>
</Biometry>
<IdentityDocs>
    <IdentityDoc1>
        <Image>
            <Encoding>jpg</Encoding>
            <Data>/9j/4AAQSkZJ...</Data>
        </Image>
        <Title>U.S. Passport</Title>
        <IssuedBy>Passport Agency</IssuedBy>
        <Number>3234567890USA123456M</Number>
        <Expiry>2100-01-01</Expiry>
    </IdentityDoc1>
    <IdentityDoc2>
        <Image>
            <Encoding>jpg</Encoding>
            <Data>/9j/4AAQSk...</Data>
        </Image>
        <Title>Drivers License</Title>
        <IssuedBy>Washington DMV</IssuedBy>
        <Number>W99999992</Number>
        <Expiry>2100-01-01</Expiry>
    </IdentityDoc2>
    <SPF10>
        <Image>
            <Encoding>jpg</Encoding>
            <Data>/9j/4AAQS...</Data>
        </Image>
        <Title />
        <IssuedBy />
        <Number />
        <Expiry />
    </SPF10>
</IdentityDocs>
<NACI>
    <NACCCaseNumber>12346</NACCCaseNumber>
    <NACICaseNumber>12354</NACICaseNumber>
    <Check>
        <Type>SII</Type>
        <Status>AP</Status>
    </Check>
    <Check>
        <Type>DCII</Type>
        <Status>AP</Status>
    </Check>
    <Check>
        <Type>FBI Name</Type>
        <Status>AP</Status>
    </Check>

```

```

        <Check>
          <Type>FBI CHF</Type>
          <Status>AP</Status>
        </Check>
        <Check>
          <Type>NACI</Type>
          <Status>WR</Status>
        </Check>
        <CardIssuanceApproved>YES</CardIssuanceApproved>
        <Comments />
      </NACI>
    <Photo>
      <Encoding>jpg</Encoding>
      <Data>/9j/4AAQS...</Data>
    </Photo>
    <System>
      <GUID>27d13f46-4a52-46e2-86cd-6849c29632b0</GUID>
      <CredNo>1</CredNo>
      <CS>1</CS>
      <POA>1</POA>
      <ICI>1</ICI>
      <UserStatus>NAC Verified</UserStatus>
      <IssuanceNotifyURL>http://10.10.0.42/Listener/Listener.asp
    </IssuanceNotifyURL>
    </System>
    <Actions />
  </Applicant>
</Agency>
</PivCardRequest>

```

Response:

```

<?xml version="1.0" encoding="utf-16"?><PivImportResponse
xmlns="http://www.intercede.com/MyIDPISchema/PIVImportResponse"><Agency><AgencyName>
Department of Treasury</AgencyName><AgencyCode>0001</AgencyCode><Result>Already
Exists</Result><Applicant><FirstName>David</FirstName><LastName>Balsam
</LastName><EmployeeID>19760223</EmployeeID><CardRequest>0</CardRequest><Result>Added
</Result><Reason></Reason></Applicant></Agency></PivImportResponse>

```